

FOCUS ON

Sea Side Suitable



Die Nähe zum Meer stellt ganz besondere Umweltbedingungen dar. Ständige Feuchtigkeit, salzhaltige Luft, Wind, Sand und intensive Sonneneinstrahlung schaffen ein besonders aggressives Umfeld für im Freien exponierte Objekte.



In Küstenregionen reicht es nicht aus, dass eine Leuchte ästhetisch ansprechend oder funktional ist. Ihre Materialien, Oberflächen und internen Mechanismen müssen darauf vorbereitet sein, der beschleunigten Abnutzung durch Korrosion, Oxidation und plötzliche Temperaturschwankungen standzuhalten.



Diese Sonderausgabe von Faro Barcelona vereint eine Auswahl an Leuchten und Ventilatoren, die speziell für eine langfristige Leistung unter anspruchsvollen Umweltbedingungen entwickelt wurden. Alle Modelle wurden nach Kriterien getestet, die den Anforderungen europäischer Normen wie EN 60598 (Beleuchtungsgeräte) oder Schutzstandards wie den IP-Schutzarten (Schutz gegen Staub und Wasser) sowie der Salzsprühnebelprüfung nach ISO 9227 entsprechen oder diese übertreffen. Ein Vorschlag, der nicht nur auf technische Anforderungen eingeht, sondern auch auf eine Lebensweise und den respektvollen Umgang mit diesen Landschaften.





Die Produkte dieser Kollektion bestehen aus Materialien und Oberflächen, die speziell für den Einsatz in maritimen Umgebungen ausgewählt wurden.

Technische Harze, technische Kunststoffe und mit speziellen Beschichtungen behandelte Metalle werden verwendet, um Korrosion zu verhindern.

Die Oberflächen sind UV-beständig und verfärben sich nicht, während die inneren Strukturen mechanischen Schutz gegen Stöße und Feuchtigkeit bieten.

Viele dieser Modelle überstehen Salzsprühnebeltests mit Ergebnissen, die über 1.000 Stunden ohne signifikante Verschlechterung entsprechen.

Zudem verfügen sie über hohe Schutzarten (IP44, IP65 und höher), was ihre Widerstandsfähigkeit gegen Wasser und Feststoffe gewährleistet.

Design wird in diesem Zusammenhang als eine Form der Anpassung an die Umgebung verstanden. Es handelt sich nicht nur um eine formale Wahl, sondern um eine funktionale Antwort auf Bedingungen, die die Nutzbarkeit und Integrität des Objekts über die Zeit beeinträchtigen können.

Dauerhaftigkeit wird somit zu einem entscheidenden Kriterium. Eine widerstandsfähige Leuchte verlängert nicht nur ihre Lebensdauer, sondern reduziert auch die Umweltbelastung und den Wartungsaufwand.

FLOOR

Gaia
Yembarastudio

IP55

IK06

incl.


SEA SIDE
SUITABLE

IP68
CONNECTOR



- 75564 ● Structure Beige
- 75563 ● Structure Grey

Material	Structure Concrete
Power	6W
Lumen Output	214lm
Light Source	SMD LED 2700K
Class	II
CRI	>80
Voltage	220V-240V/50/60Hz



Sea side suitable

FOCUSON



Grot 400
Faro Lab



IP55 IK06 incl. SEA SIDE SUITABLE IP68 CONNECTOR



75631 ● Structure Grey
2700K 77lm

75634 ● Structure Grey
3000K 110lm

Material	Structure Concrete
	Diffuser Glass
Power	6,5W
Light Source	SMD LED
Class	II
CRI	≥80
Voltage	100V-277V/50/60Hz



Grot 700
Faro Lab


IP55 IK06 incl. SEA SIDE SUITABLE IP68 CONNECTOR



75632 ● Structure Grey
2700K 77lm

75635 ● Structure Grey
3000K 110lm


Material	Structure Concrete
	Diffuser Glass
Power	6,5W
Light Source	SMD LED
Class	II
CRI	≥80
Voltage	100V-277V/50/60Hz



Grot 75632

Hybrid energy for maximum efficiency

Luma features a hybrid system that seamlessly integrates solar energy with mains electricity. During the day, it recharges via its solar panel; when the battery runs low, the electrical grid takes over—without any interruption. It can also be configured to operate in solar-only mode, completely cable-free, making it ideal for reducing energy consumption and simplifying installation.

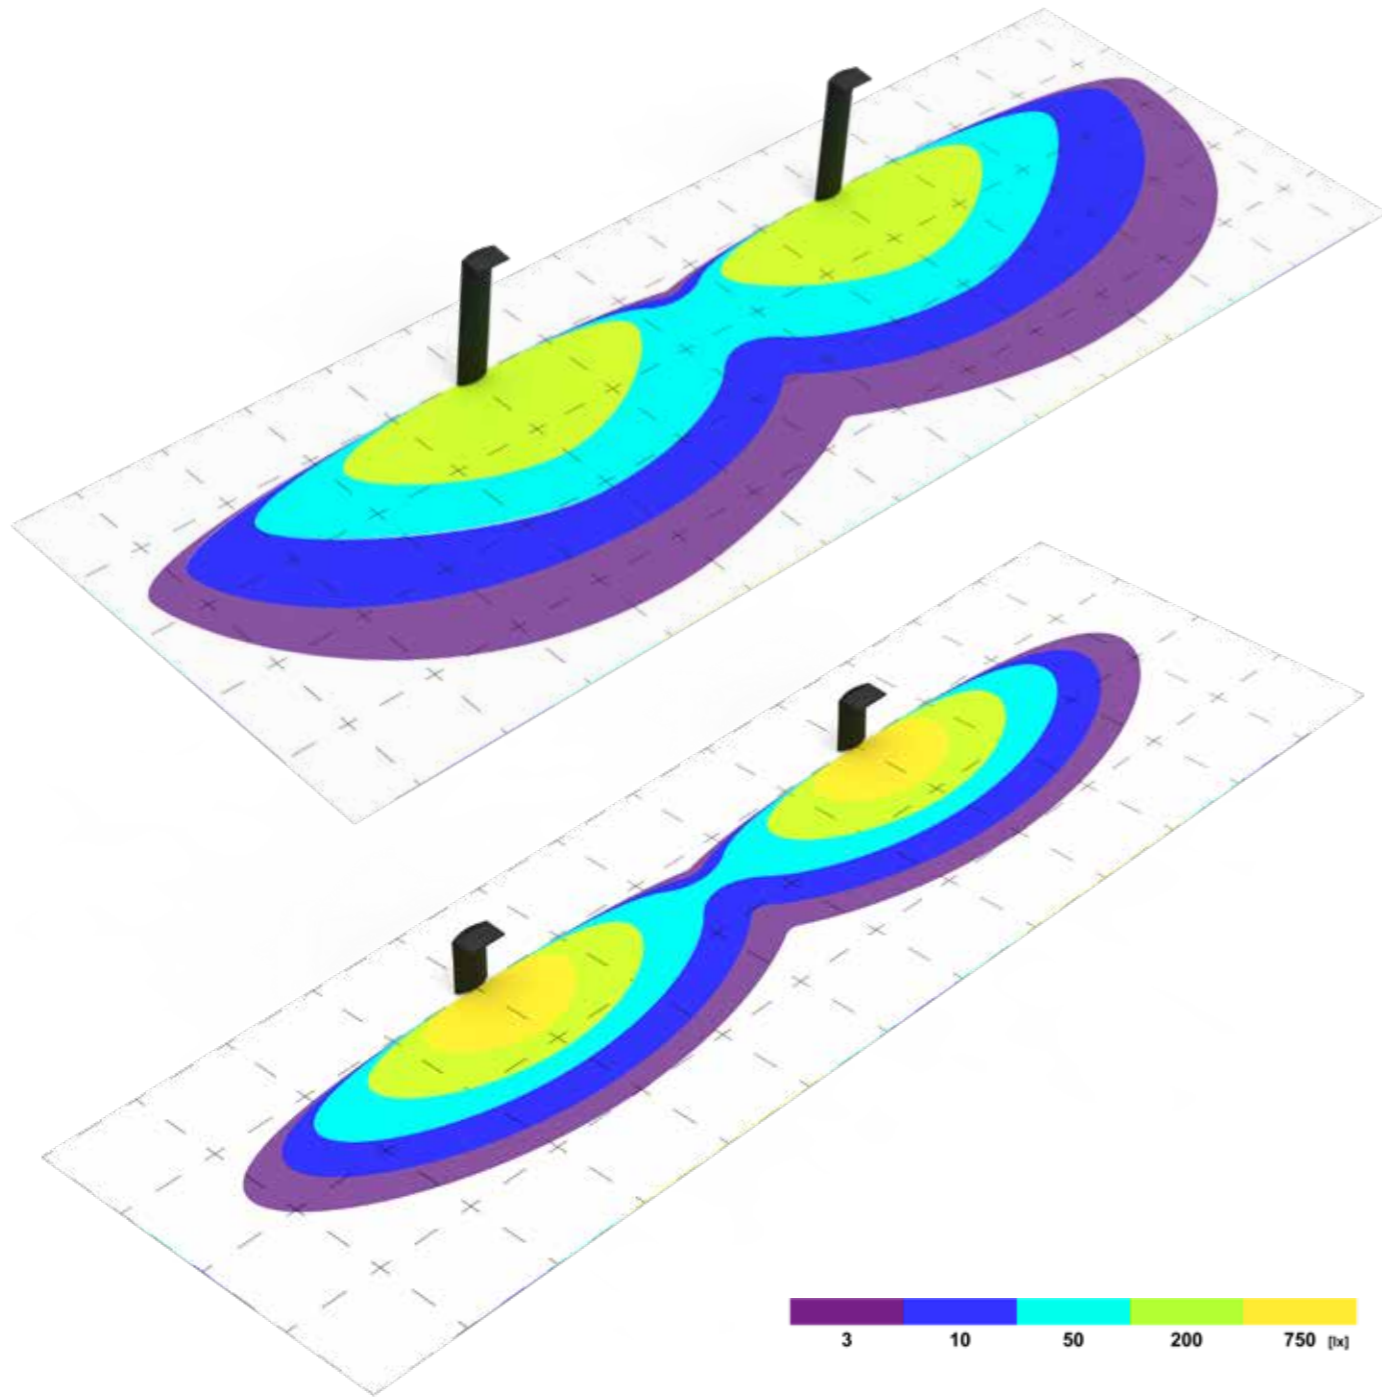

HYBRID
SOLAR+CABLE

Sea side suitable

FOCUSON



LUMA Faro Lab



Smart motion sensor
 Luma's motion sensor offers three modes: permanent on, total off, or 20% light that ramps up to 100% when motion is detected. An intelligent system that enhances comfort, reduces consumption, and extends battery life.




A sustainable savings option
 Luma optimizes every resource: solar energy to reduce consumption, advanced optics to maximize performance, and a wireless operation that simplifies installation. Technology, design, and sustainability—all in service of efficiency.



Every detail matters
 The top features a subtle tilt that prevents water from pooling on the solar panel, ensuring better performance and a longer lifespan. This thoughtful detail also optimizes the solar capture angle, boosting charging efficiency and supporting more sustainable operation.


Luma 300
Faro Lab

IP65 IK06 SEA SIDE SUITABLE PIR solar

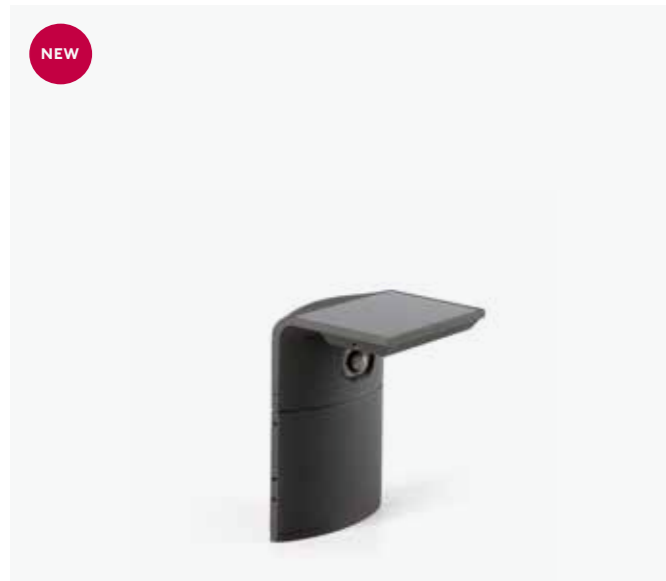

74457 ● Structure Dark Grey
● Diffuser Transparent

Material	Structure Aluminium Diffuser PC
Power	5W
Lumen Output	525,5lm
Light Source	LED MODULE 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Beam angle	120°
Battery	4/6 Charge




Luma 600
Faro Lab

IP65 IK06 SEA SIDE SUITABLE PIR solar



74458 ● Structure Dark Grey
● Diffuser Transparent

Material	Structure Aluminium Diffuser PC
Power	5W
Lumen Output	525,5lm
Light Source	LED MODULE 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Beam angle	120°
Battery	4/6 Charge



Glint 157
Faro Lab

IP55 IK06 incl. SEA SIDE SUITABLE


IP68 CONNECTOR



75636 ● Structure Grey
2700K
68lm

75639 ● Structure Grey
3000K
97lm

Material	Structure Concrete
	Diffuser Glass
Power	6,5W
Light Source	SMD LED
Class	II
CRI	≥80
Voltage	100V-277V/50/60Hz



Glint 400
Faro Lab

IP55 IK06 incl. SEA SIDE SUITABLE


IP68 CONNECTOR



75637 ● Structure Grey
2700K
68lm

75640 ● Structure Grey
3000K
97lm

Material	Structure Concrete
	Diffuser Glass
Power	6,5W
Light Source	SMD LED
Class	II
CRI	≥80
Voltage	100V-277V/50/60Hz



Glint 700
Faro Lab

IP55 IK06 incl. SEA SIDE SUITABLE


IP68 CONNECTOR



75638 ● Structure Grey
2700K
68lm

75641 ● Structure Grey
3000K
97lm

Material	Structure Concrete
	Diffuser Glass
Power	6,5W
Light Source	SMD LED
Class	II
CRI	≥80
Voltage	100V-277V/50/60Hz



Glint 75640

Totem 285
Roger Vancells

IP55 IK06 incl. SEA SIDE SUITABLE IP68 CONNECTOR




75550 ● Structure Grey
2700K 254lm
75551 ● Structure Grey
3000K 370lm

Material	Structure Concrete
Power	6,5W
Light Source	SMD LED
Class	II
CRI	≥80
Voltage	220V-240V/50/60Hz



reddot winner 2023



Totem 611
Roger Vancells

IP55 IK06 incl. SEA SIDE SUITABLE IP68 CONNECTOR




75552 ● Structure Grey
2700K 307lm
75553 ● Structure Grey
3000K 370lm

Material	Structure Concrete
Power	6,5W
Light Source	SMD LED
Class	II
CRI	≥80
Voltage	220V-240V/50/60Hz




reddot winner 2023



Sea side suitable

FOCUSON

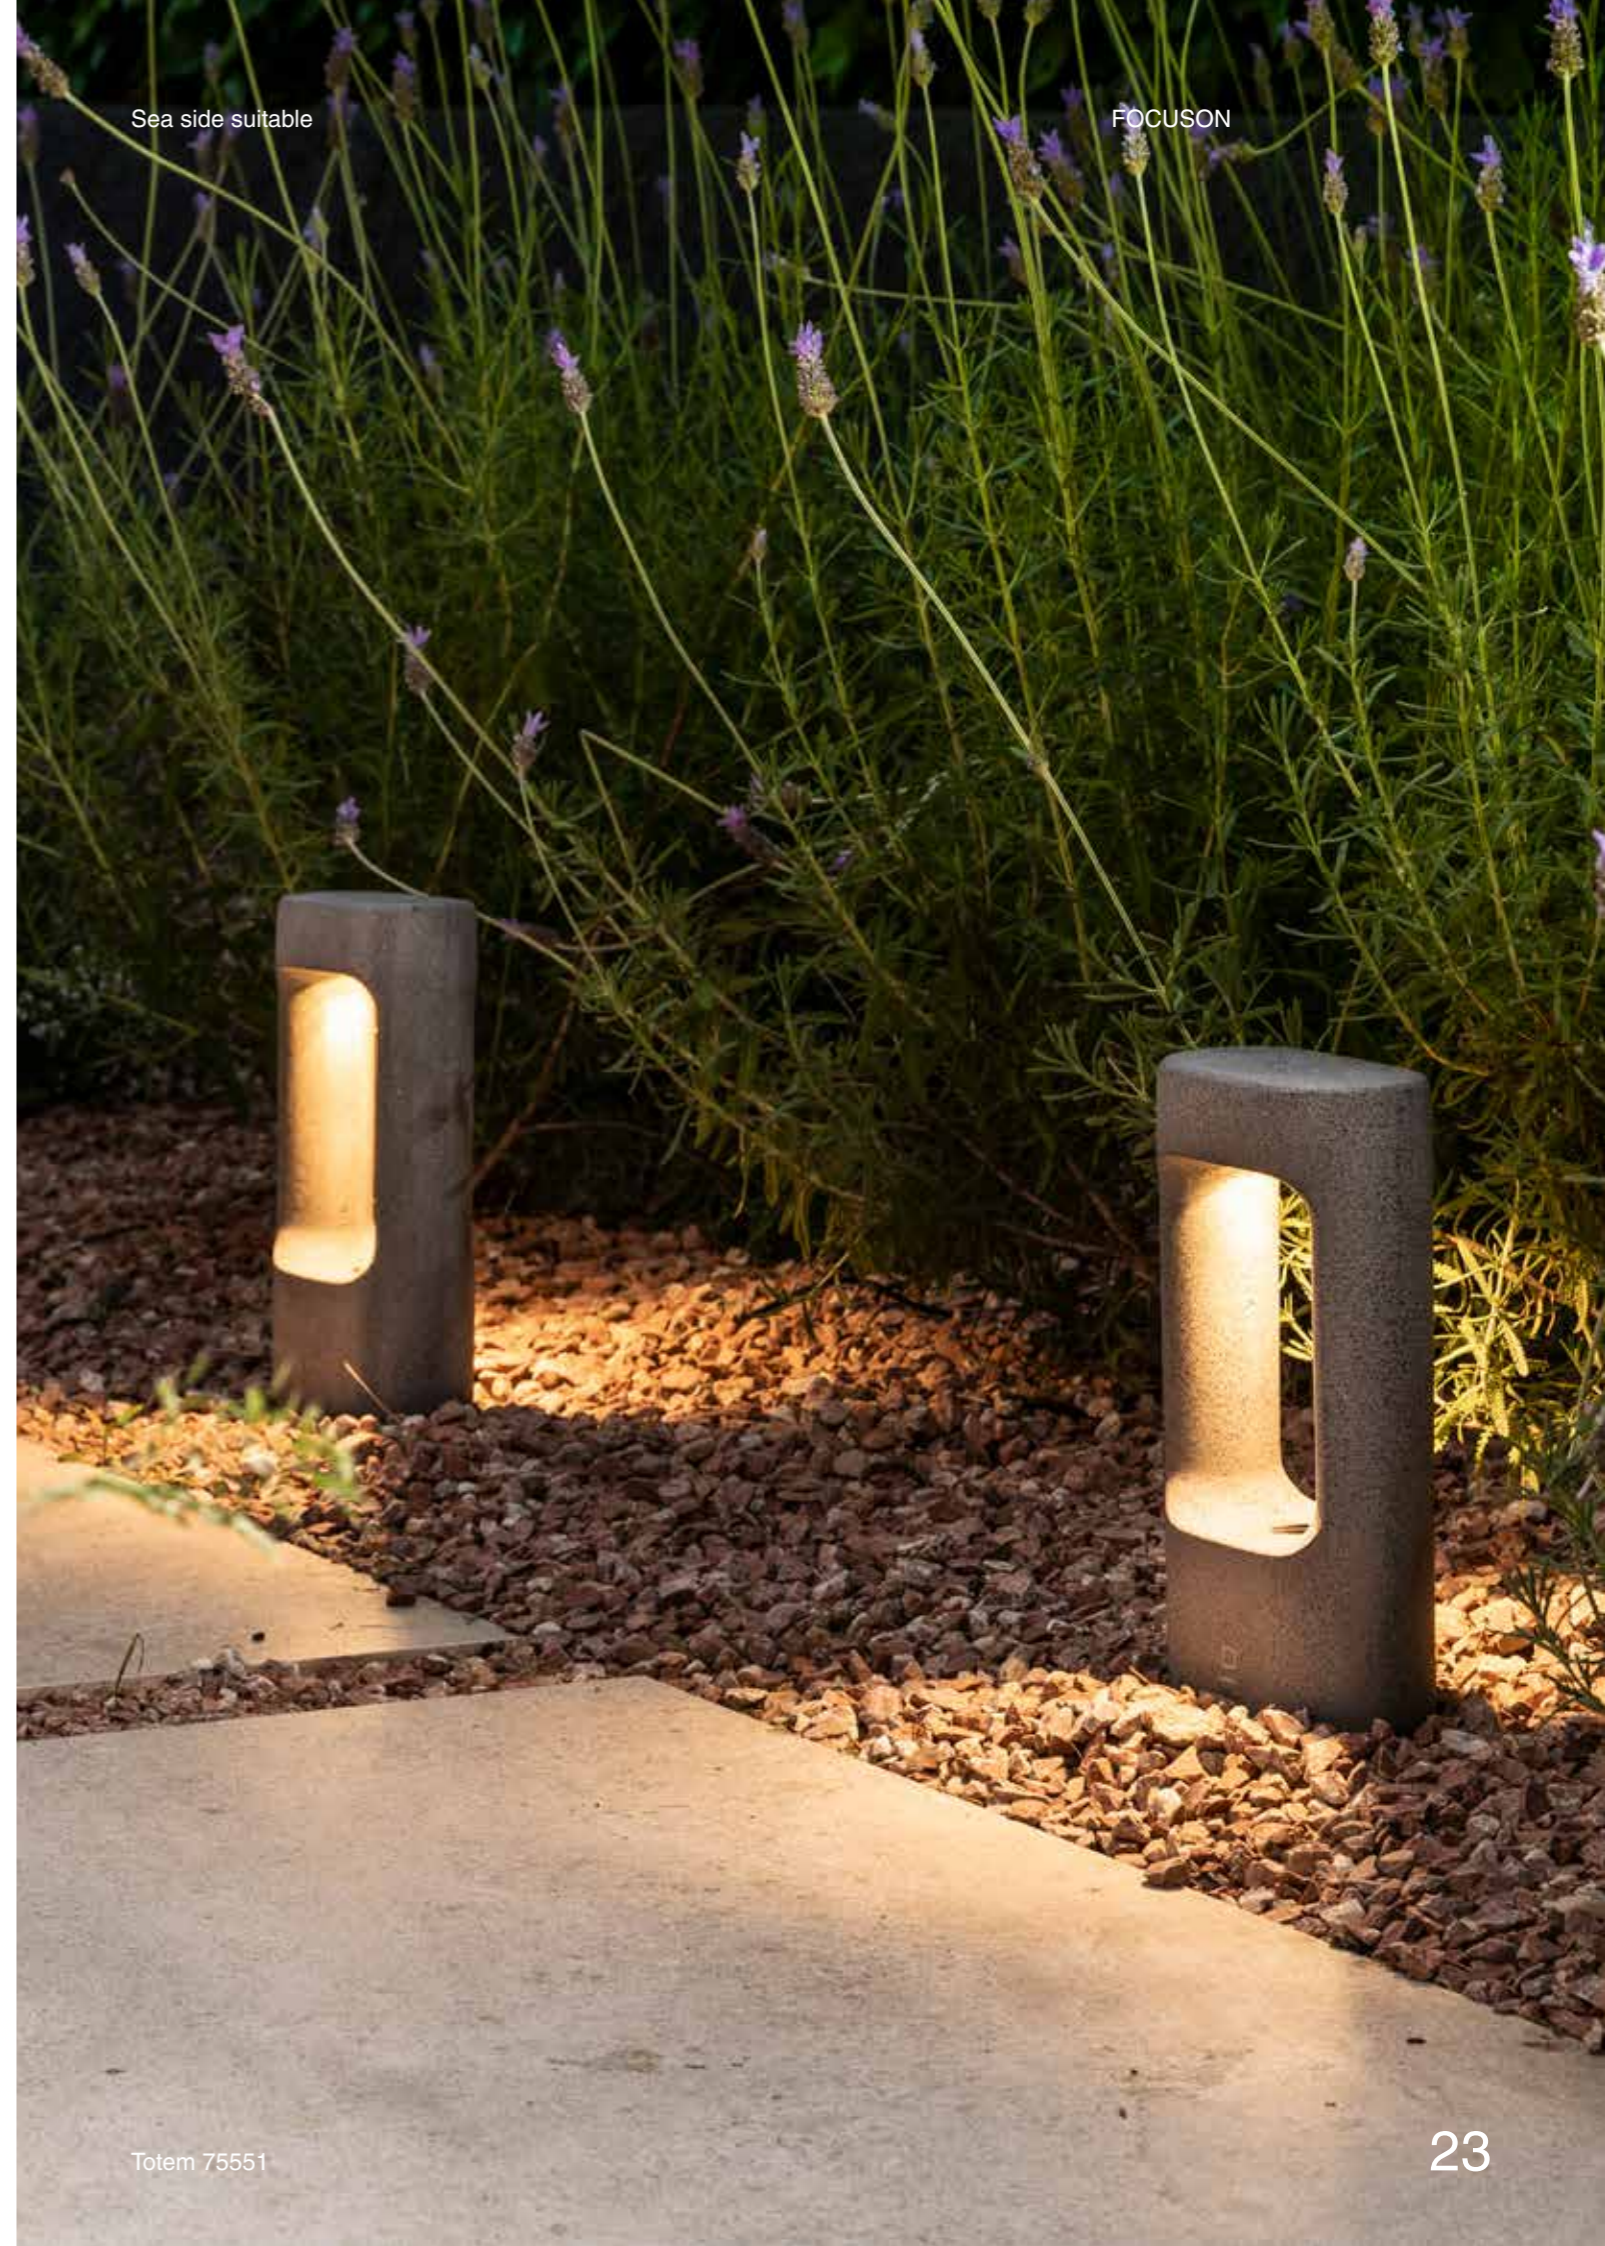

Totem 75551

Pilo

IP65 IK06 incl. SEA SIDE SUITABLE





75595 ● Structure Grey
2700K 242lm
75596 ● Structure Grey
3000K 370lm

Material	Structure Concrete
Power	6W
Light Source	SMD LED
Class	II
CRI	≥80
Voltage	220V-240V/50/60Hz



Sea side suitable

FOCUSON

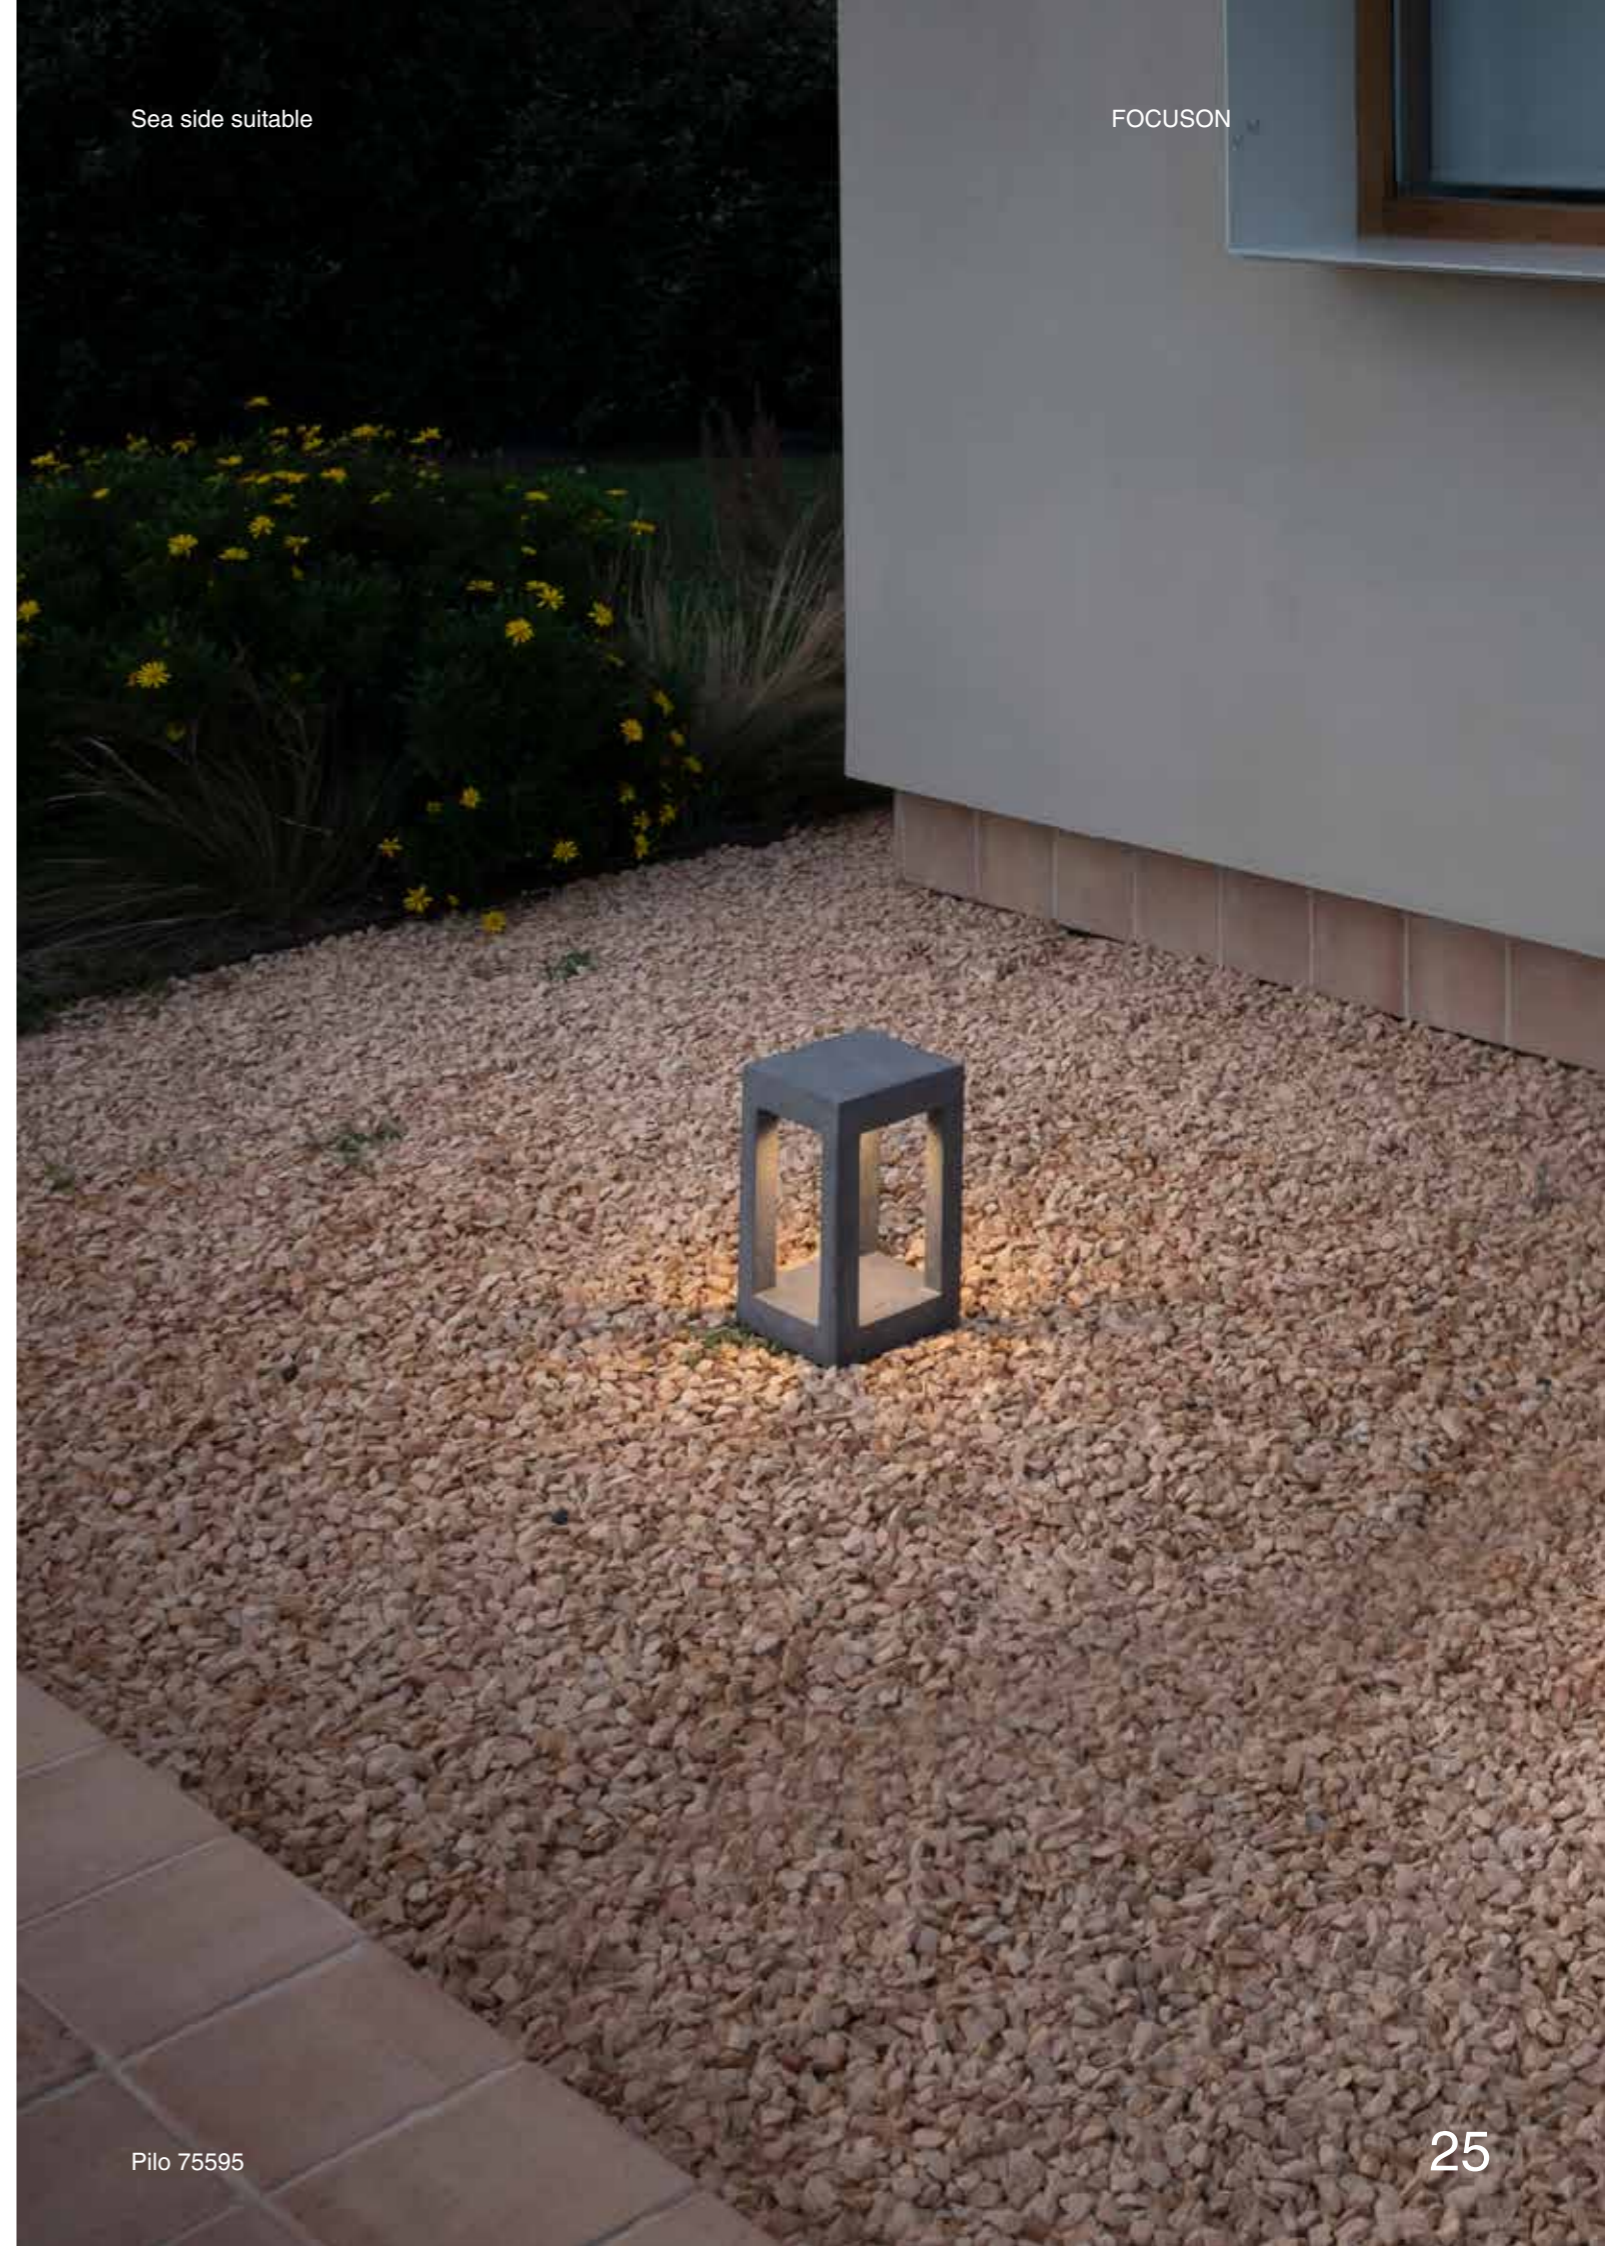


Block 350
Àlex & Manel Llusçà

IP65 IK06 SEA SIDE SUITABLE



- 74141 ● Structure Grey ● Diffuser Opal
- 74144 **NEW** ● Structure Sand ● Diffuser Opal

Material	Structure Concrete
	Diffuser Glass
Light Source	1 E27 LED G45 max. 15W
Bulb incl.	No
Recom. Bulb	17463
Class	I




Block 700
Àlex & Manel Llusçà

IP65 IK06 SEA SIDE SUITABLE



- 74142 ● Structure Grey ● Diffuser Opal
- 74146 **NEW** ● Structure Sand ● Diffuser Opal

Material	Structure Concrete
	Diffuser Glass
Light Source	1 E27 LED G45 max. 15W
Bulb incl.	No
Recom. Bulb	17463
Class	I




Keenan 1

IP67 IK08 no incl. SEA SIDE SUITABLE



- 70546 ● Structure Matt Nickel
● Diffuser Transparent
- 70564 ● Structure Matt Nickel
● Diffuser Transparent

Material	Structure Aluminium
	Diffuser PC
Power	0,5W
Lumen Output	9,3lm
Light Source	SMD LED 6500K
Class	III
CRI	>80
Voltage	12VDC




Keenan 1

IP67 IK08 no incl. SEA SIDE SUITABLE




- 70546 ● Structure Matt Nickel
● Diffuser Transparent
- 70564 ● Structure Matt Nickel
● Diffuser Transparent

Material	Structure Aluminium
	Diffuser PC
Power	0,5W
Lumen Output	9,3lm
Light Source	SMD LED 6500K
Class	III
CRI	>80
Voltage	12VDC



Sea side suitable

FOCUSON

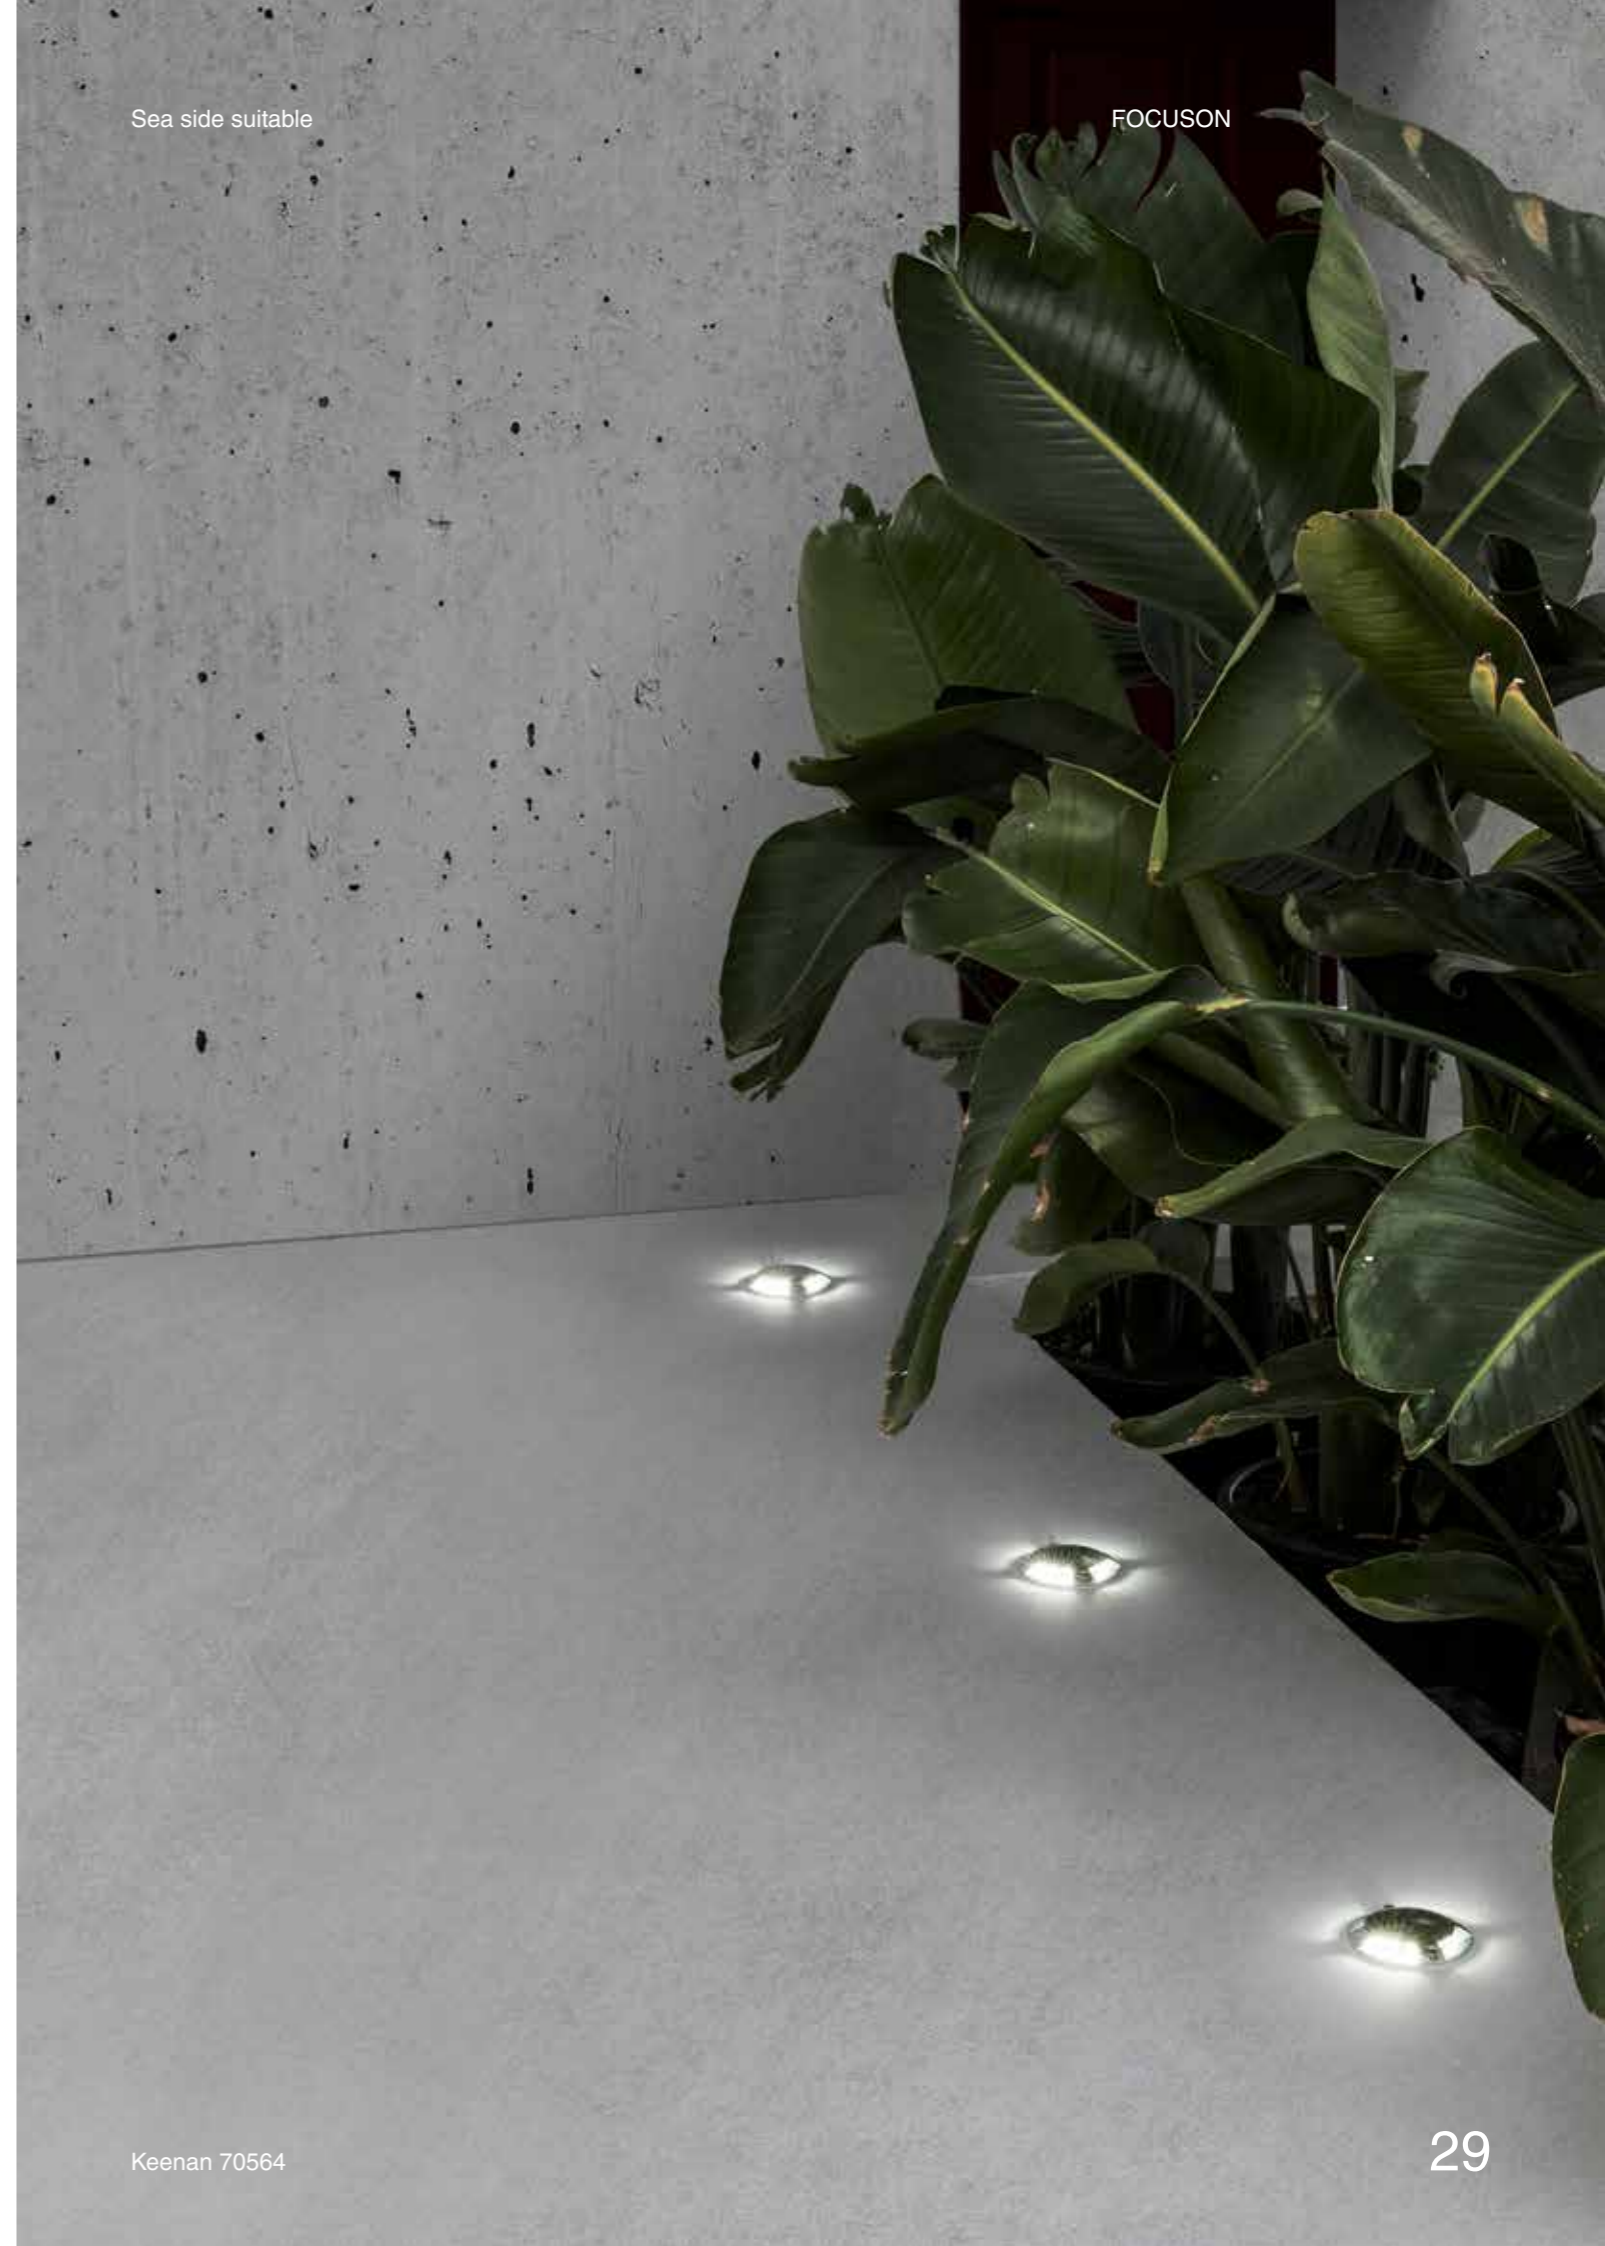

PROJECTORS & SPIKES


Puk 4W Puk 12.5W Puk 25W



ø36



ø59



ø85

FINISH

● Black

COLOR TEMPERATURE

2700K CRI80

3000K CRI80

BEAM ANGLE

8°

15°

20°

30°

40°

50°

ACCESSORIES



Honeycomb



Visor



Spike



Tree Fixing




Concrete Fixing



Puk 36

IP65 IK06 no incl. SEA SIDE SUITABLE 90°

Material	Structure Aluminium
	Diffuser Glass
Power	4W
Light Source	COB LED
Class	III
CRI	>80
Voltage	24VDC
Cable	2m



Family	Finish	Color T	Beam Angle										
75300- Puk Projector ø36	2 Black	<table border="1"> <tr><td>2</td><td>2700K</td></tr> <tr><td>3</td><td>3000K</td></tr> </table>	2	2700K	3	3000K	<table border="1"> <tr><td>1</td><td>8°</td></tr> <tr><td>2</td><td>20°</td></tr> <tr><td>3</td><td>40°</td></tr> </table>	1	8°	2	20°	3	40°
2	2700K												
3	3000K												
1	8°												
2	20°												
3	40°												


<p>COB LED 4W CRI>80 281lm 2700K</p> <p>8° COB LED 4W CRI>80 290lm 3000K</p>	<p>COB LED 4W CRI>80 302lm 2700K</p> <p>20° COB LED 4W CRI>80 312lm 3000K</p>	<p>COB LED 4W CRI>80 292lm 2700K</p> <p>40° COB LED 4W CRI>80 302lm 3000K</p>
--	---	---

Optional drivers

24V DC 4W	220/240V	1-22 units	on/off	IP20	98324099
	220/240V	1-22 units	on/off	IP67	98324100

Optional accessories

<p>Puk 36 Honeycomb Accessory 75300H ● Black</p> <p>Material Structure Aluminium</p>	<p>Puk 36 Visor Accessory 75300V ● Black</p> <p>Material Structure Aluminium</p>
<p>Puk 36/59 Tree Accessory 75300F ● Black</p> <p>Material Structure Aluminium</p>	<p>Puk 36 Spike Accessory 75300S ● Black</p> <p>Material Structure Polyamide</p>

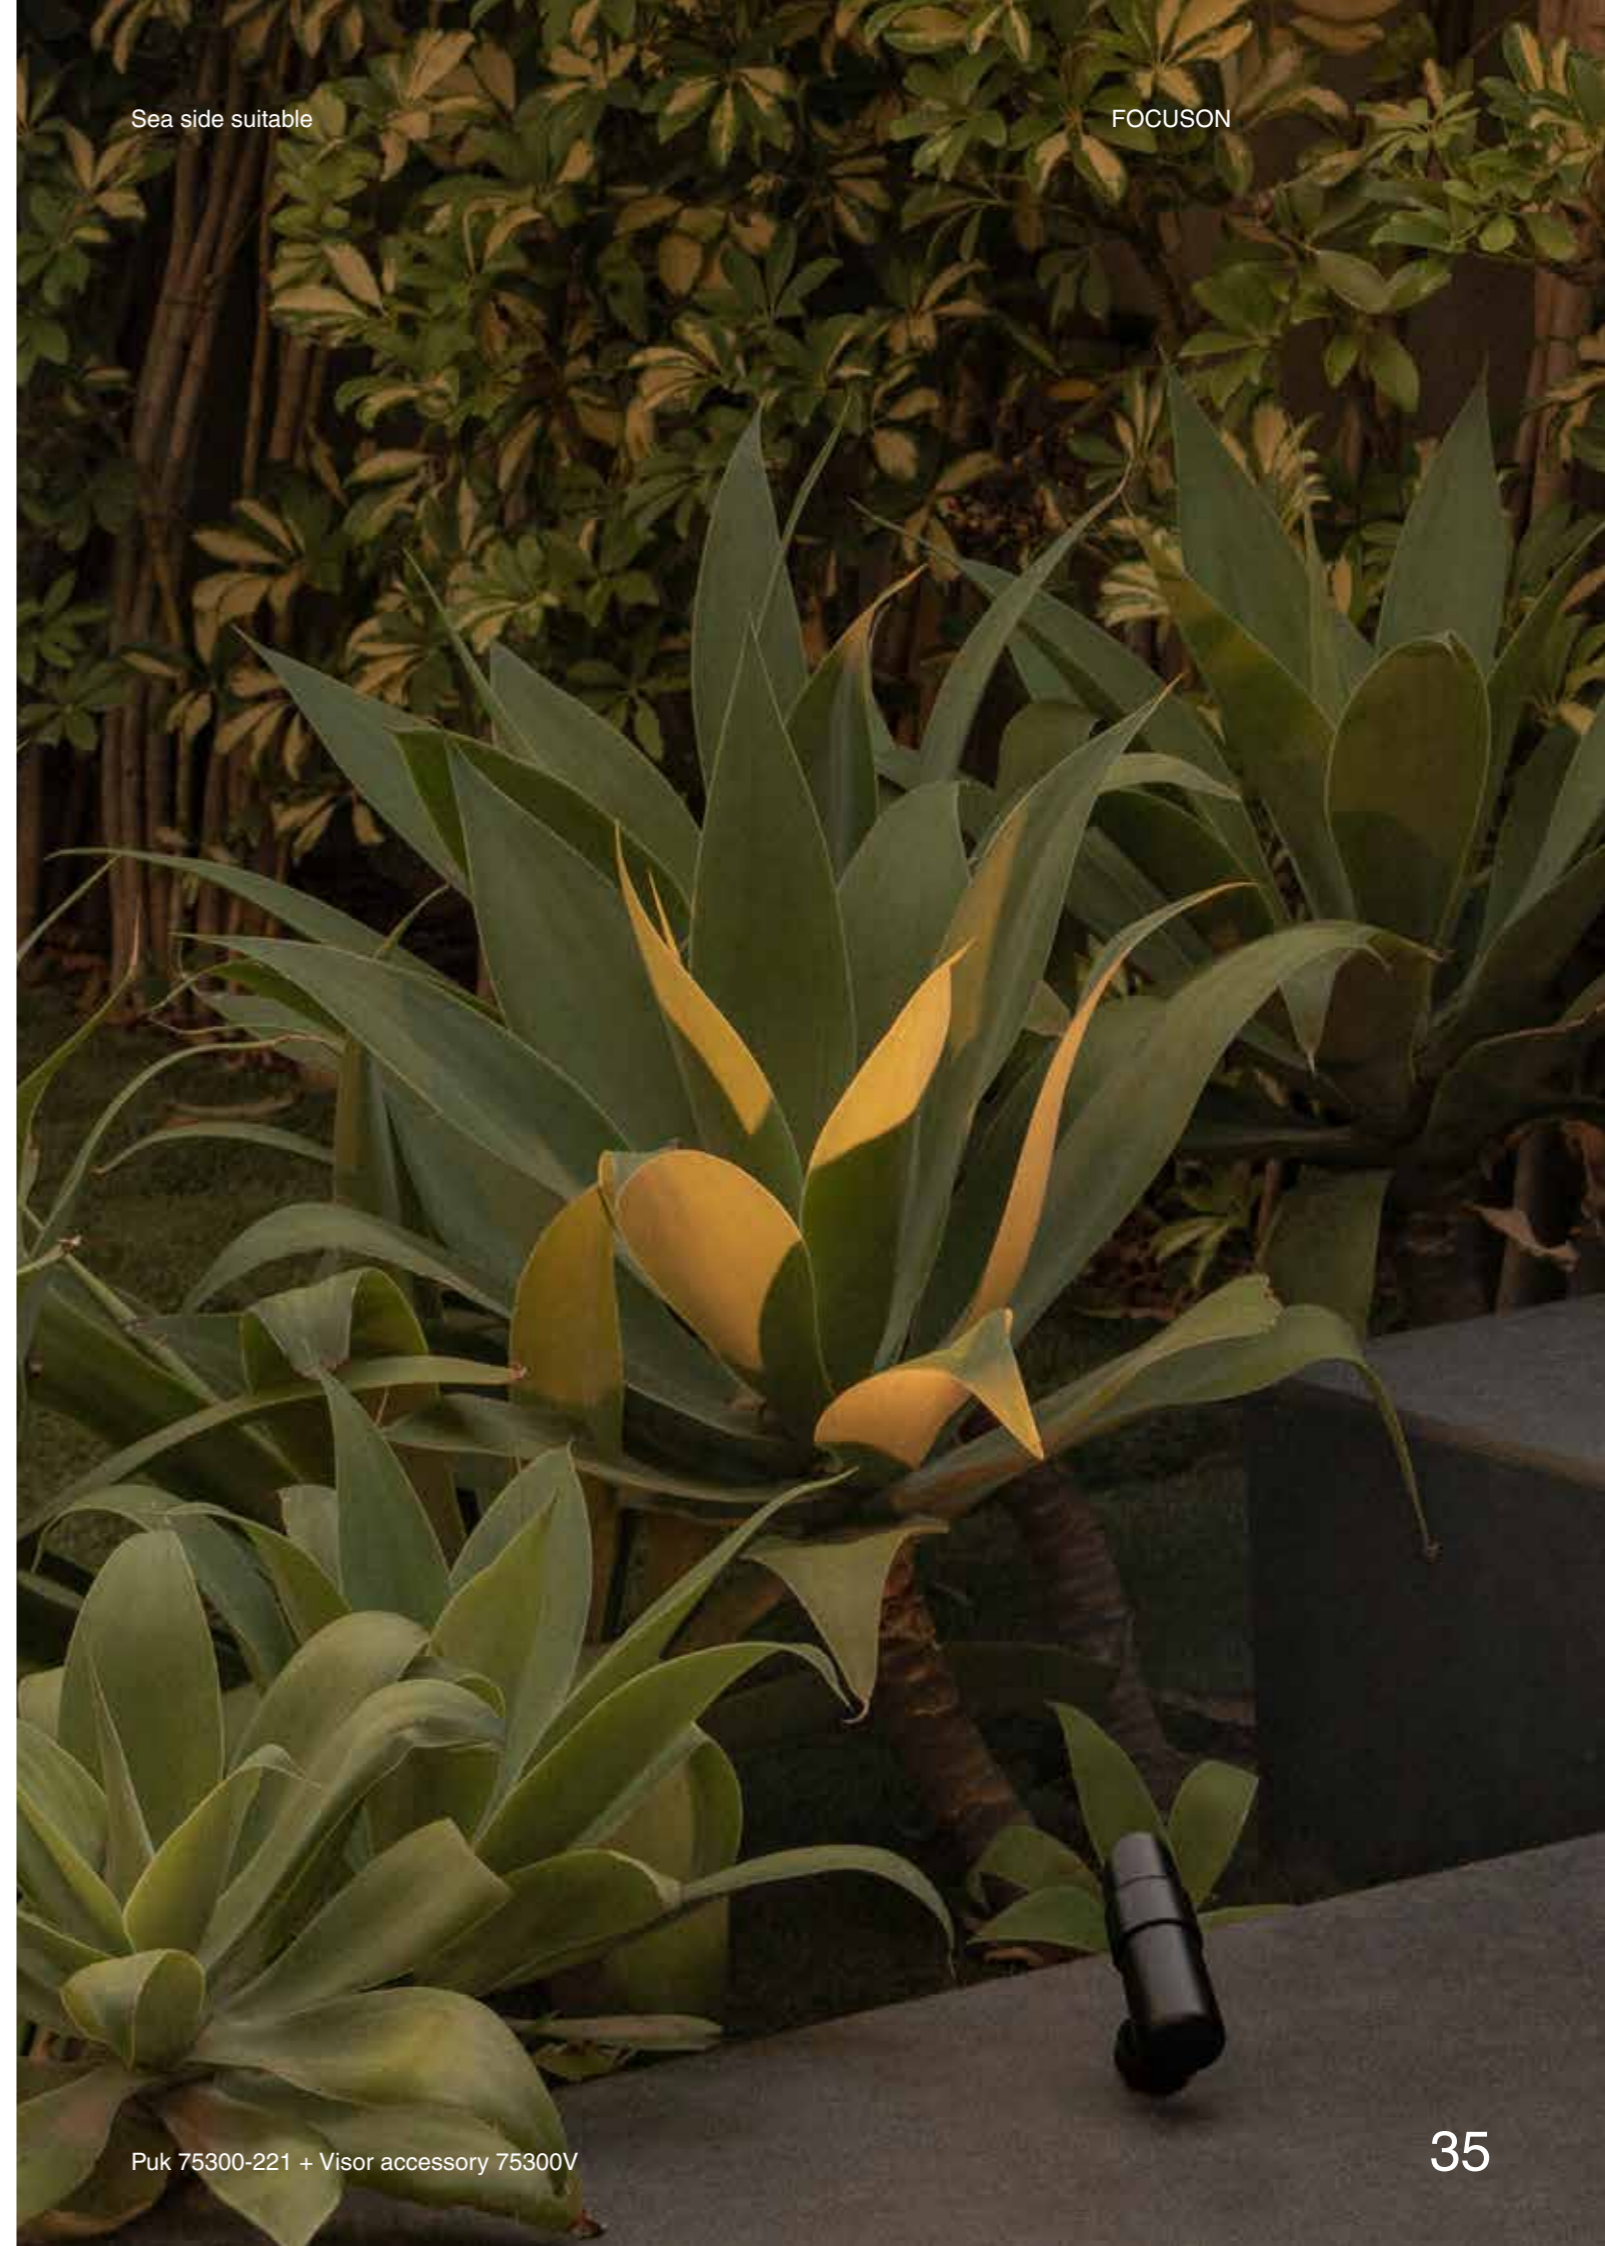


Puk 75300-221 + Visor accessory 75300V

Puk 59

IP65 IK08 incl. SEA SIDE SUITABLE 90°

Material	Structure Aluminium
	Diffuser Glass
Power	12,5W
Lumen Output	339lm
Light Source	COB LED
Class	I
CRI	>80



Family	Finish	Color T	Beam Angle
75302- Puk Projector ø59	2 Black	2 2700K	1 15°
		3 3000K	2 30°
			3 50°

15°	COB LED 12,5W CRI>80 339lm 2700K		30°	COB LED 12,5W CRI>80 482lm 2700K		50°	COB LED 12,5W CRI>80 539lm 2700K	
	COB LED 12,5W CRI>80 349lm 3000K			COB LED 12,5W CRI>80 496lm 3000K			COB LED 12,5W CRI>80 555lm 3000K	


Optional accessories

	Puk 59 Honeycomb Accessory 75302H ● Black Material Structure Aluminium		Puk 59 Visor Accessory 75302V ● Black Material Structure Aluminium
	Puk 36/59 Tree Accessory 75300F ● Black Material Structure Aluminium		Puk 59/85 Spike Accessory 75302S ● Black Material Structure Polyamide
	Puk 59/85 Ground Fixing Accessory 75302F ● Satin Stainless Material Structure Stainless Steel		

Puk 85

IP65 IK08 incl. SEA SIDE SUITABLE 90°

Material	Structure Aluminium
	Diffuser Glass
Power	25W
Lumen Output	1827lm
Light Source	COB LED
Class	I
CRI	>80



Family	Finish	Color T	Beam Angle
75303- Puk Projector ø85	2 Black	2 2700K	1 15°
		3 3000K	2 30°
			3 50°

15°	COB LED 25W CRI>80 1827lm 2700K		30°	COB LED 25W CRI>80 1888lm 2700K		50°	COB LED 25W CRI>80 1690lm 2700K	
	COB LED 25W CRI>80 1884lm 3000K			COB LED 25W CRI>80 1947lm 3000K			COB LED 25W CRI>80 1743lm 3000K	

Optional accessories

	Puk 85 Honeycomb Accessory 75303H ● Black Material Structure Aluminium		Puk 85 Visor Accessory 75303V ● Black Material Structure Aluminium
	Puk 85 Tree Accessory 75303F ● Black Material Structure Aluminium		Puk 59/85 Spike Accessory 75302S ● Black Material Structure Polyamide
	Puk 59/85 Ground Fixing Accessory 75302F ● Satin Stainless Material Structure Stainless Steel		

Muur 250


IP65 IK06 incl. SEA SIDE SUITABLE 45°



71771 ● Structure Dark Grey
● Diffuser Transparent

Material	Structure Aluminium Diffuser Glass
Power	28,5W
Lumen Output	1877lm
Light Source	SMD LED 3000K
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz
Beam angle	36°

Muur 250 Visor Accessory	
71771V ● Dark Grey	
Material	Structure Aluminium

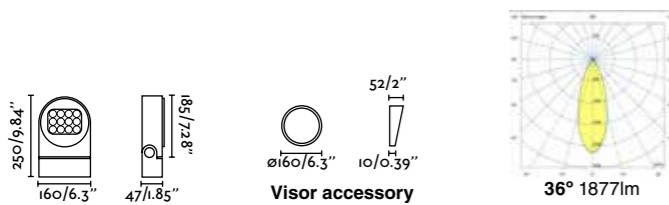

Toni Alegre Design

IP65 IK07 SEA SIDE SUITABLE 90°




71528 ● Structure Matt Black
● Diffuser Transparent

Material	Structure PC Diffuser PC
Light Source	1 GU10 LED PAR16 max. 5W
Bulb incl.	No
Recom. Bulb	17334
Class	II
Cable	2.5m



Sea side suitable

FOCUSON

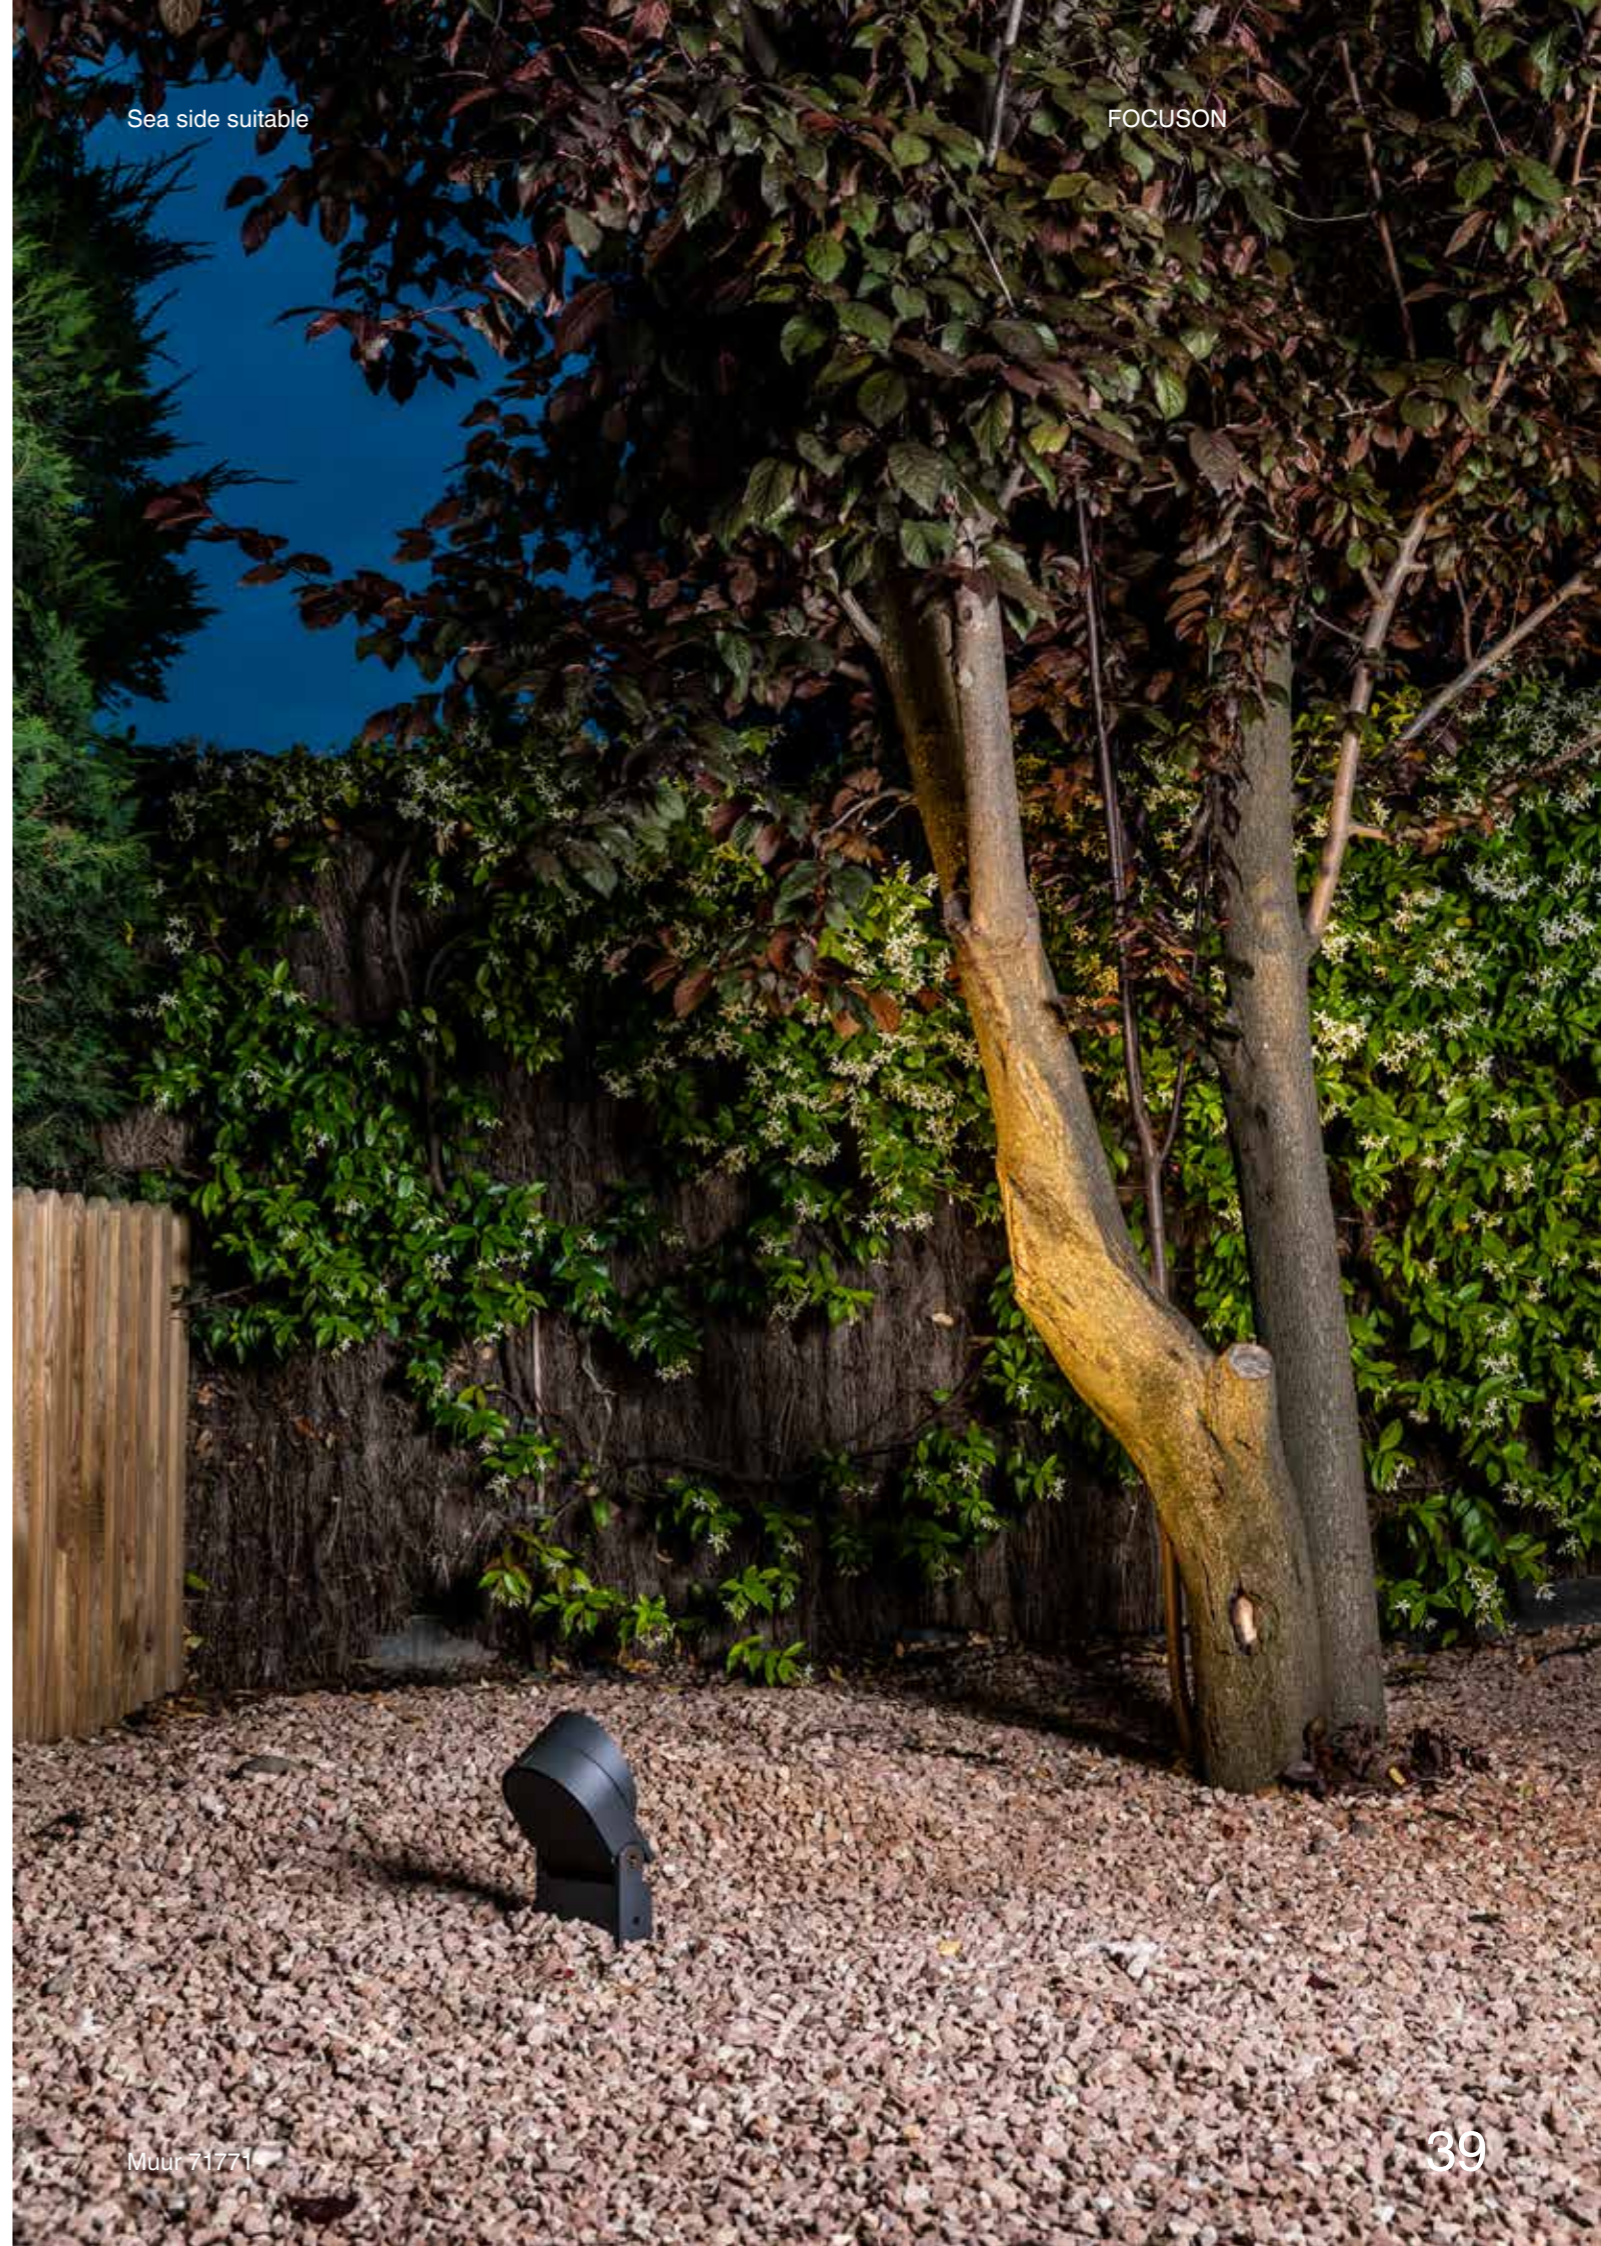

Muur 71771

Sau M Base
13W



Sau M 156
13W



Sau M 471
13W



FINISH

● Black

COLOR TEMPERATURE

3000K CRI90

BEAM ANGLE

10°

20°

30°

10x60°

ACCESSORIES



Visor



Tree projector




Honeycomb



Sau XS 85


IP65 IK05 no incl. SEA SIDE SUITABLE 160° 60°

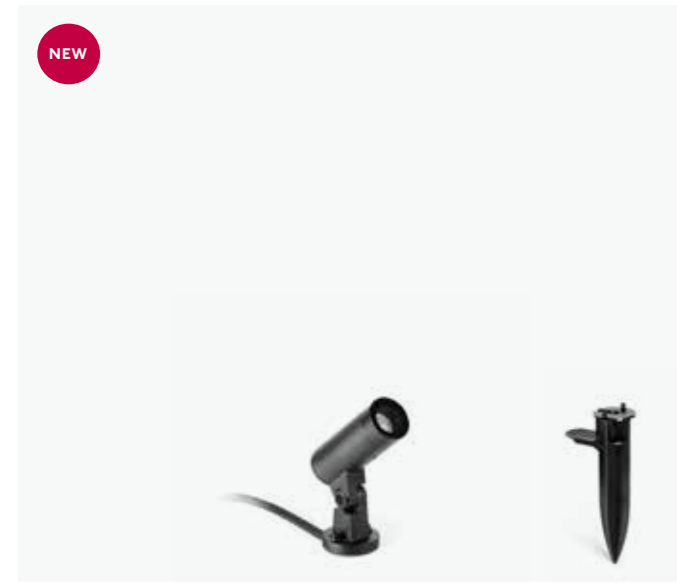

71780-2 ●● Structure Black + Black
● Diffuser Transparent

Sau XS 262

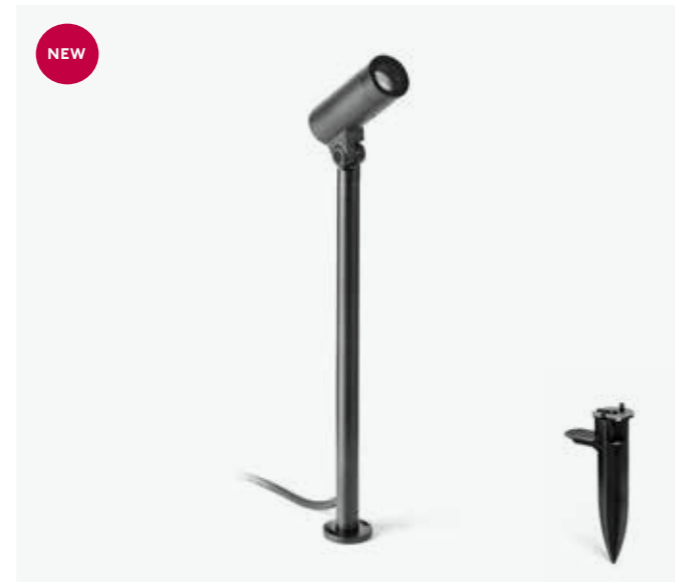


IP65 IK05 no incl. SEA SIDE SUITABLE 160° 60°






71781-2 ●● Structure Black + Black
● Diffuser Transparent

Material	Structure Aluminium + ABS Diffuser PC
Power	2,5W
Lumen Output	144lm
Light Source	HIGH POWER LED 3000K
Class	III
CRI	90
Voltage	24VDC
Beam angle	30°


Material	Structure Aluminium + ABS Diffuser PC
Power	2,5W
Lumen Output	144lm
Light Source	HIGH POWER LED 3000K
Class	III
CRI	90
Voltage	24VDC
Beam angle	30°

	Honeycomb Accessory
71780H	● Black
Material	Structure Aluminium
	Tree Fixing Accessory
71780F	● Black
Material	Structure Textile
	Visor Accessory
71780V	● Black
Material	Structure Aluminium

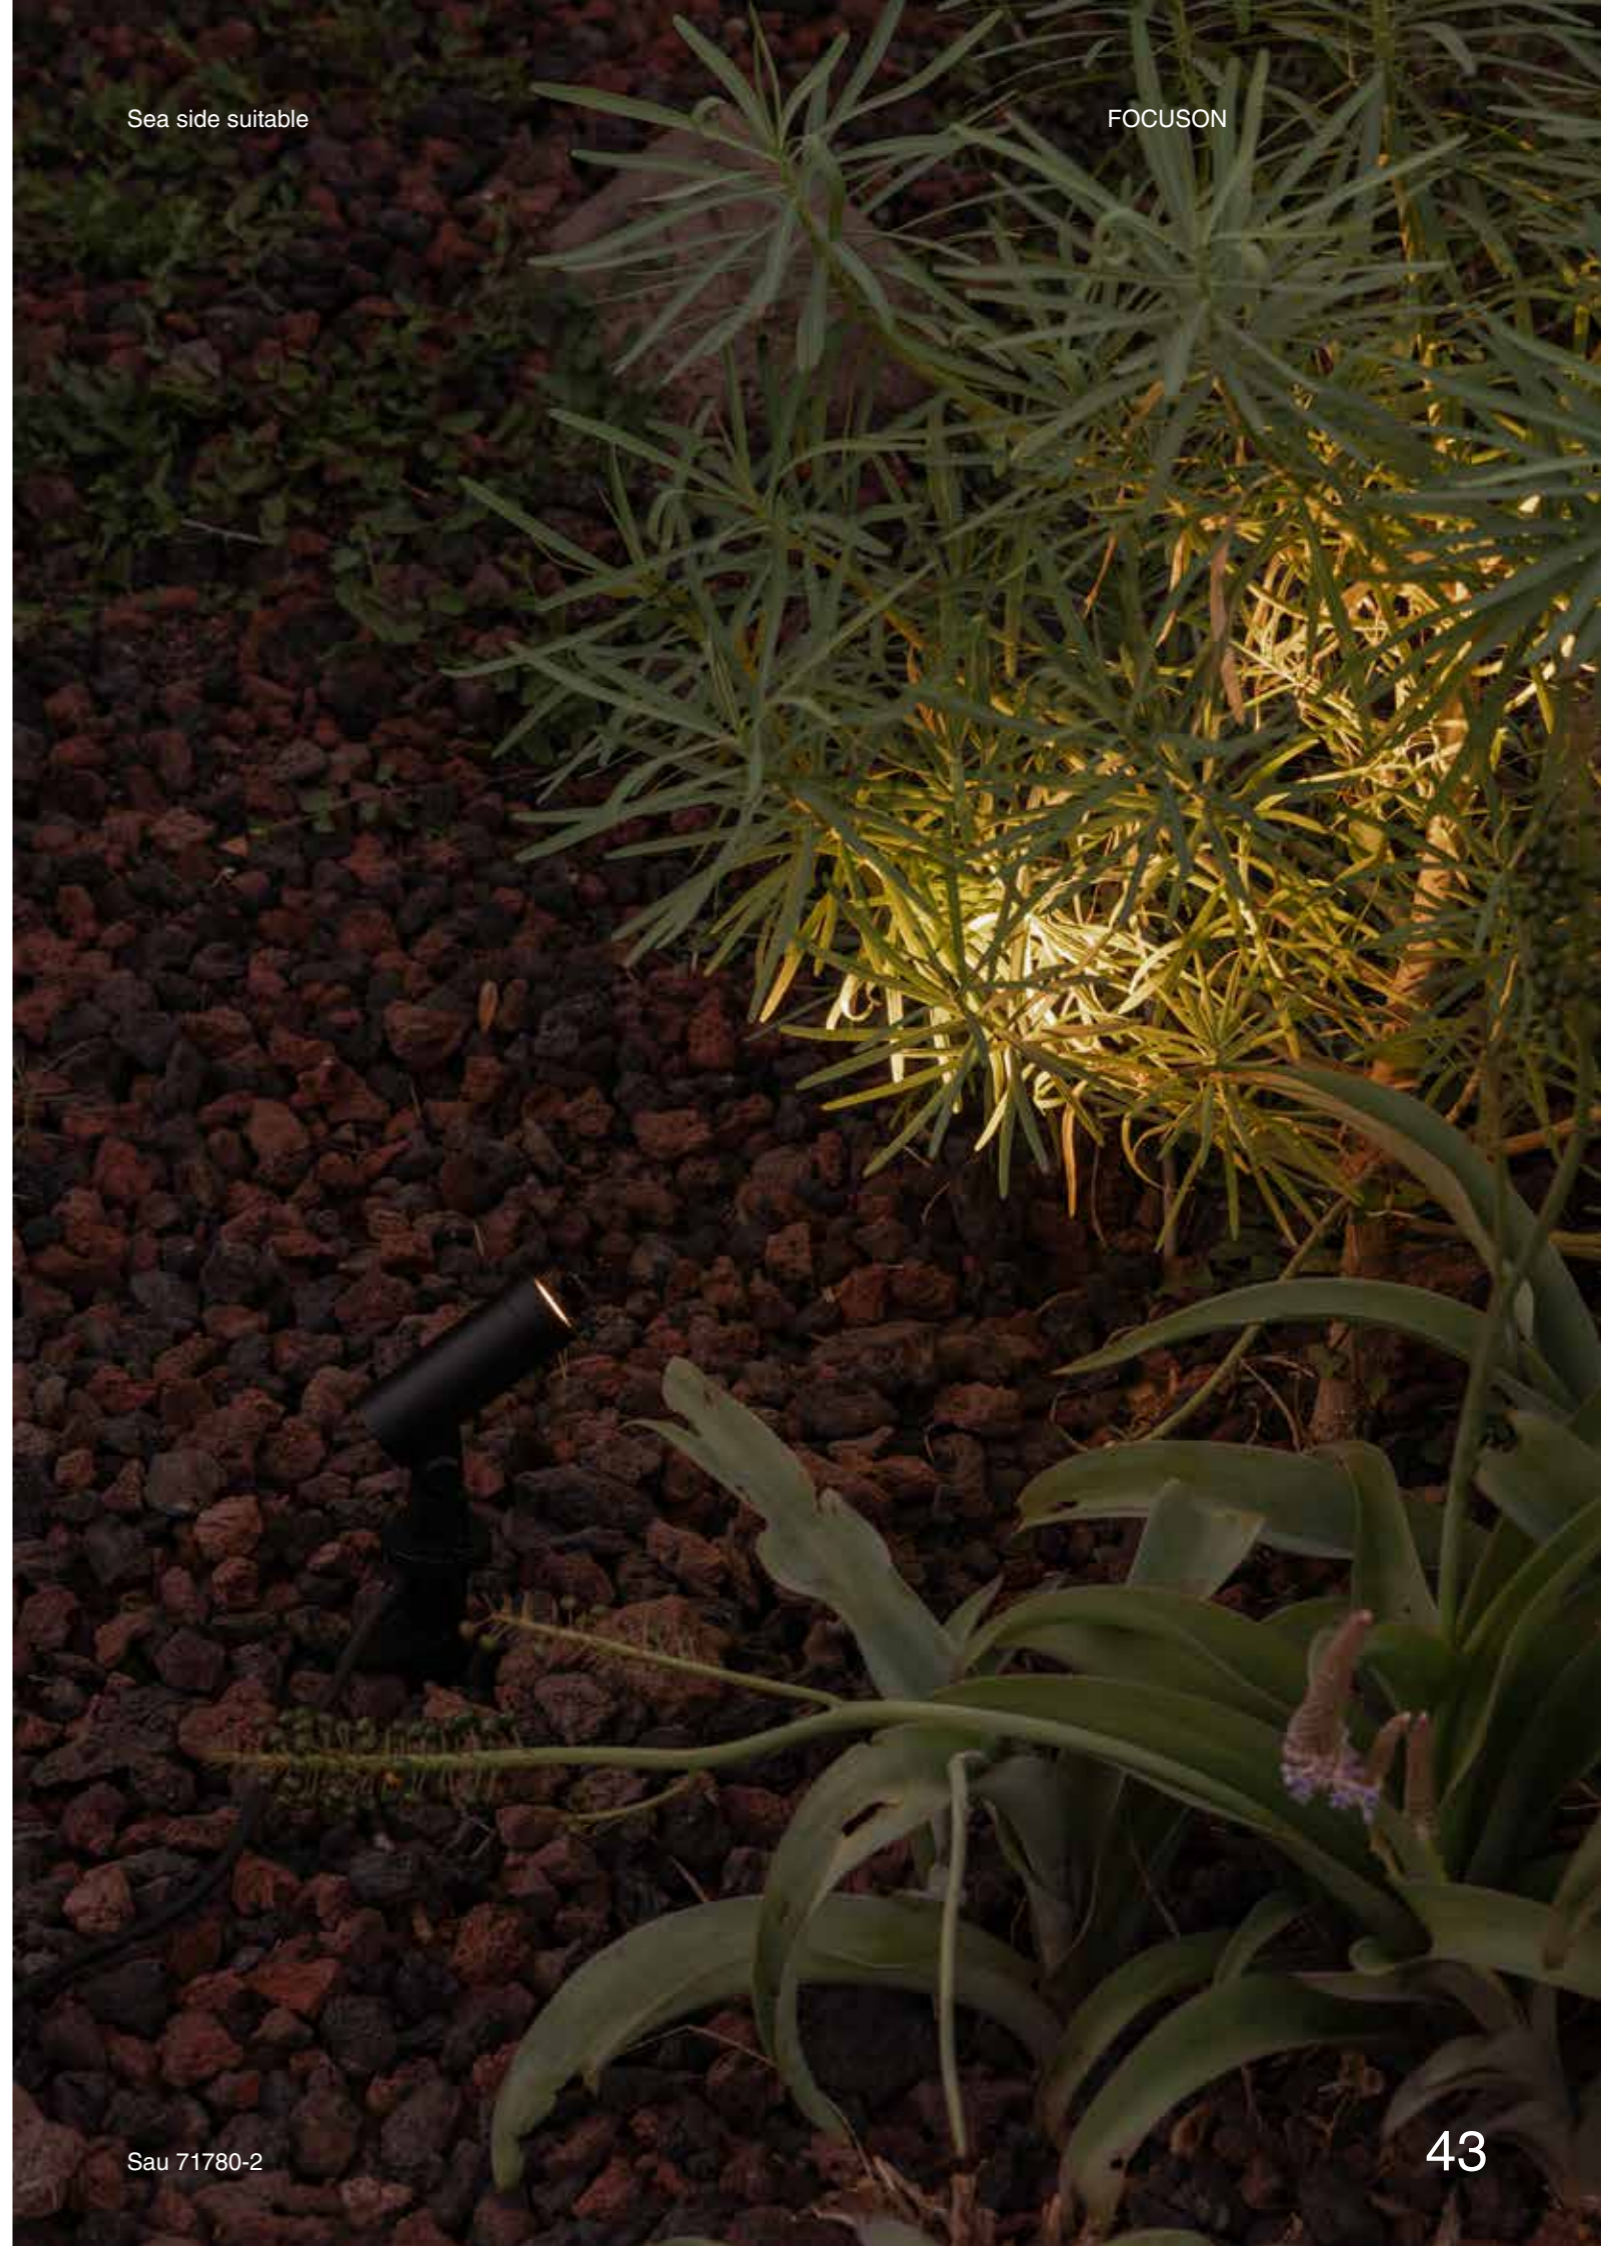

Sau S 90


IP65 IK06 incl. SEA SIDE SUITABLE 135° 60°

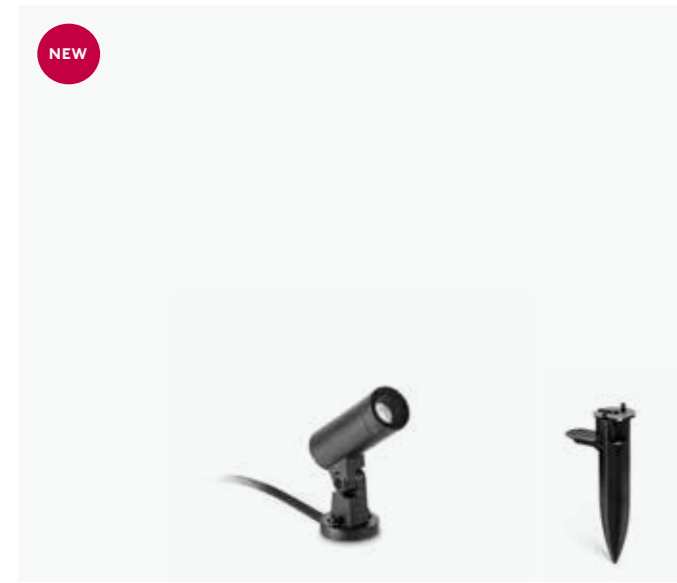

71772 ●● Structure Black + Black
● Diffuser Transparent

Sau S 360

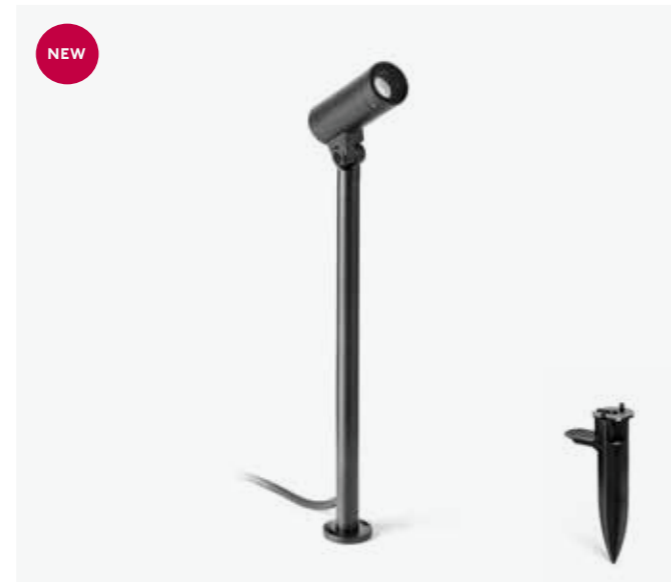


IP65 IK06 incl. SEA SIDE SUITABLE 135° 60°





71773 ●● Structure Black + Black
● Diffuser Transparent

Material	Structure Aluminium + ABS Diffuser PC
Power	6W
Lumen Output	430lm
Light Source	COB LED 3000K
Class	I
CRI	>90
Voltage	220V-240V/50/60Hz
Beam angle	30°

Material	Structure Aluminium + ABS Diffuser PC
Power	6W
Lumen Output	430lm
Light Source	COB LED 3000K
Class	I
CRI	>90
Voltage	220V-240V/50/60Hz
Beam angle	30°

	Honeycomb Accessory
71772H	● Black
Material	Structure Aluminium
	Visor Accessory
71772V	● Black
Material	Structure Aluminium
	Tree Fixing Accessory
71780F	● Black
Material	Structure Textile



Sau M 155




IP65


IK06




SEA SIDE SUITABLE



Material	Structure Aluminium + ABS
	Diffuser PC
Power	13W
Light Source	COB LED
Class	I
CRI	>90
Voltage	220V-240V/50/60Hz



Family	Finish	Color T	Beam Angle								
71785- Sau Projector 155	2 Black	3 3000K	<table border="1"> <tr><td>1</td><td>10°</td></tr> <tr><td>2</td><td>20°</td></tr> <tr><td>3</td><td>30°</td></tr> <tr><td>4</td><td>10x60°</td></tr> </table>	1	10°	2	20°	3	30°	4	10x60°
1	10°										
2	20°										
3	30°										
4	10x60°										

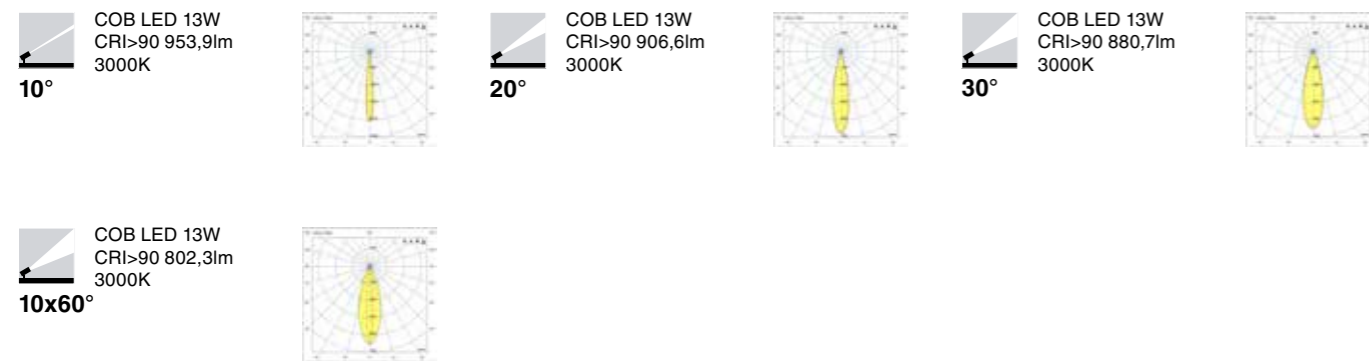

Optional accessories

Honeycomb Accessory
 71785H ● Black
Material Structure Aluminium

Visor Accessory
 71785V ● Black
Material Structure Aluminium


Tree Fixing Accessory
 71785F ● Black
Material Structure Textile




Sau M 156

IP65 IK06 incl. SEA SIDE SUITABLE 135° 60°

Material	Structure Aluminium + ABS
	Diffuser PC
Power	13W
Lumen Output	1313lm
Light Source	COB LED
Class	I
CRI	>90
Voltage	220V-240V/50/60Hz



Family	Finish	Color T	Beam Angle								
71786- Sau Projector 155	2 Black	3 3000K	<table border="1"> <tr><td>1</td><td>10°</td></tr> <tr><td>2</td><td>20°</td></tr> <tr><td>3</td><td>30°</td></tr> <tr><td>4</td><td>10x60°</td></tr> </table>	1	10°	2	20°	3	30°	4	10x60°
1	10°										
2	20°										
3	30°										
4	10x60°										

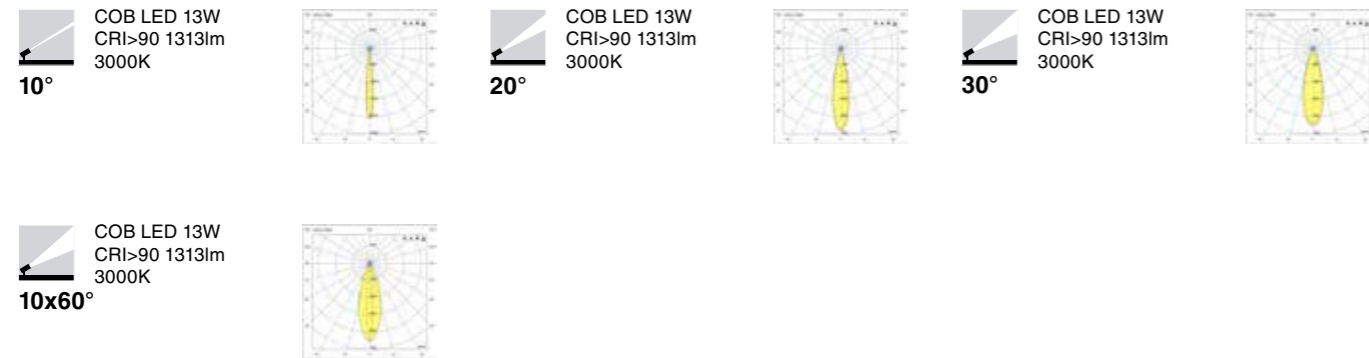

Optional accessories

	Honeycomb Accessory
	71785H ● Black
Material	Structure Aluminium


	Visor Accessory
	71785V ● Black
Material	Structure Aluminium

	Tree Fixing Accessory
	71785F ● Black
Material	Structure Textile


Sau M 471

NEW IP65 IK06 incl. SEA SIDE SUITABLE 135° 60°

Material	Structure Aluminium + ABS
	Diffuser PC
Power	13W
Lumen Output	953,9lm
Light Source	COB LED
Class	I
CRI	>90
Voltage	220V-240V/50/60Hz



Family	Finish	Color T	Beam Angle								
71787- Sau Projector 155	2 Black	3 3000K	<table border="1"> <tr><td>1</td><td>10°</td></tr> <tr><td>2</td><td>20°</td></tr> <tr><td>3</td><td>30°</td></tr> <tr><td>4</td><td>10x60°</td></tr> </table>	1	10°	2	20°	3	30°	4	10x60°
1	10°										
2	20°										
3	30°										
4	10x60°										

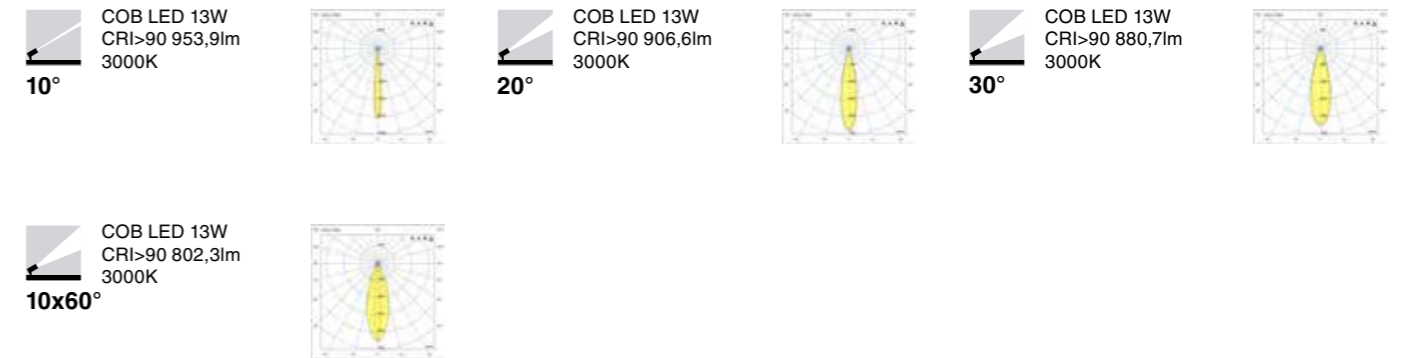

Optional accessories

	Honeycomb Accessory
	71785H ● Black
Material	Structure Aluminium

	Visor Accessory
	71785V ● Black
Material	Structure Aluminium

	Tree Fixing Accessory
	71785F ● Black
Material	Structure Textile

CEILING

Puk
4.5W

Puk
7W



ø58



ø76

FINISH

White Black

COLOR TEMPERATURE

2700K CRI90

3000K CRI90

BEAM ANGLE

15°

30°


50°



Puk 58

IP65 IK06 incl. SEA SIDE SUITABLE

Material	Structure Aluminium
	Diffuser Glass
Power	4,5W
Light Source	COB LED
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz




Family	Finish	Color T	Beam Angle
75304- Puk Ceiling ø58 4.5W	1 White	2 2700K	1 15°
	2 Black	3 3000K	2 30°
			3 50°

15°	COB LED 4,5W CRI>80 297lm 2700K		30°	COB LED 4,5W CRI>80 341lm 2700K		50°	COB LED 4,5W CRI>80 350lm 2700K	
	COB LED 4,5W CRI>80 307lm 3000K			COB LED 4,5W CRI>80 352lm 3000K			COB LED 4,5W CRI>80 361lm 3000K	

Puk 76

IP65 IK06 incl. SEA SIDE SUITABLE

Material	Structure Aluminium
	Diffuser Glass
Power	7W
Light Source	COB LED
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz



Family	Finish	Color T	Beam Angle
75305- Puk Ceiling ø76 7W	1 White	2 2700K	1 15°
	2 Black	3 3000K	2 30°
			3 50°

15°	COB LED 7W CRI>80 573lm 2700K		30°	COB LED 7W CRI>80 610lm 2700K		50°	COB LED 7W CRI>80 620lm 2700K	
	COB LED 7W CRI>80 591lm 3000K			COB LED 7W CRI>80 629lm 3000K			COB LED 7W CRI>80 640lm 3000K	


Dakron

IP65 IK10 SEA SIDE SUITABLE




70722 ● Structure Matt White
● Diffuser Opal

Material	Structure ABS
	Diffuser PC
Light Source	1 E27 LED A60 max. 15W
Bulb incl.	No
Recom. Bulb	17463
Class	II



Sea side suitable

FOCUSON

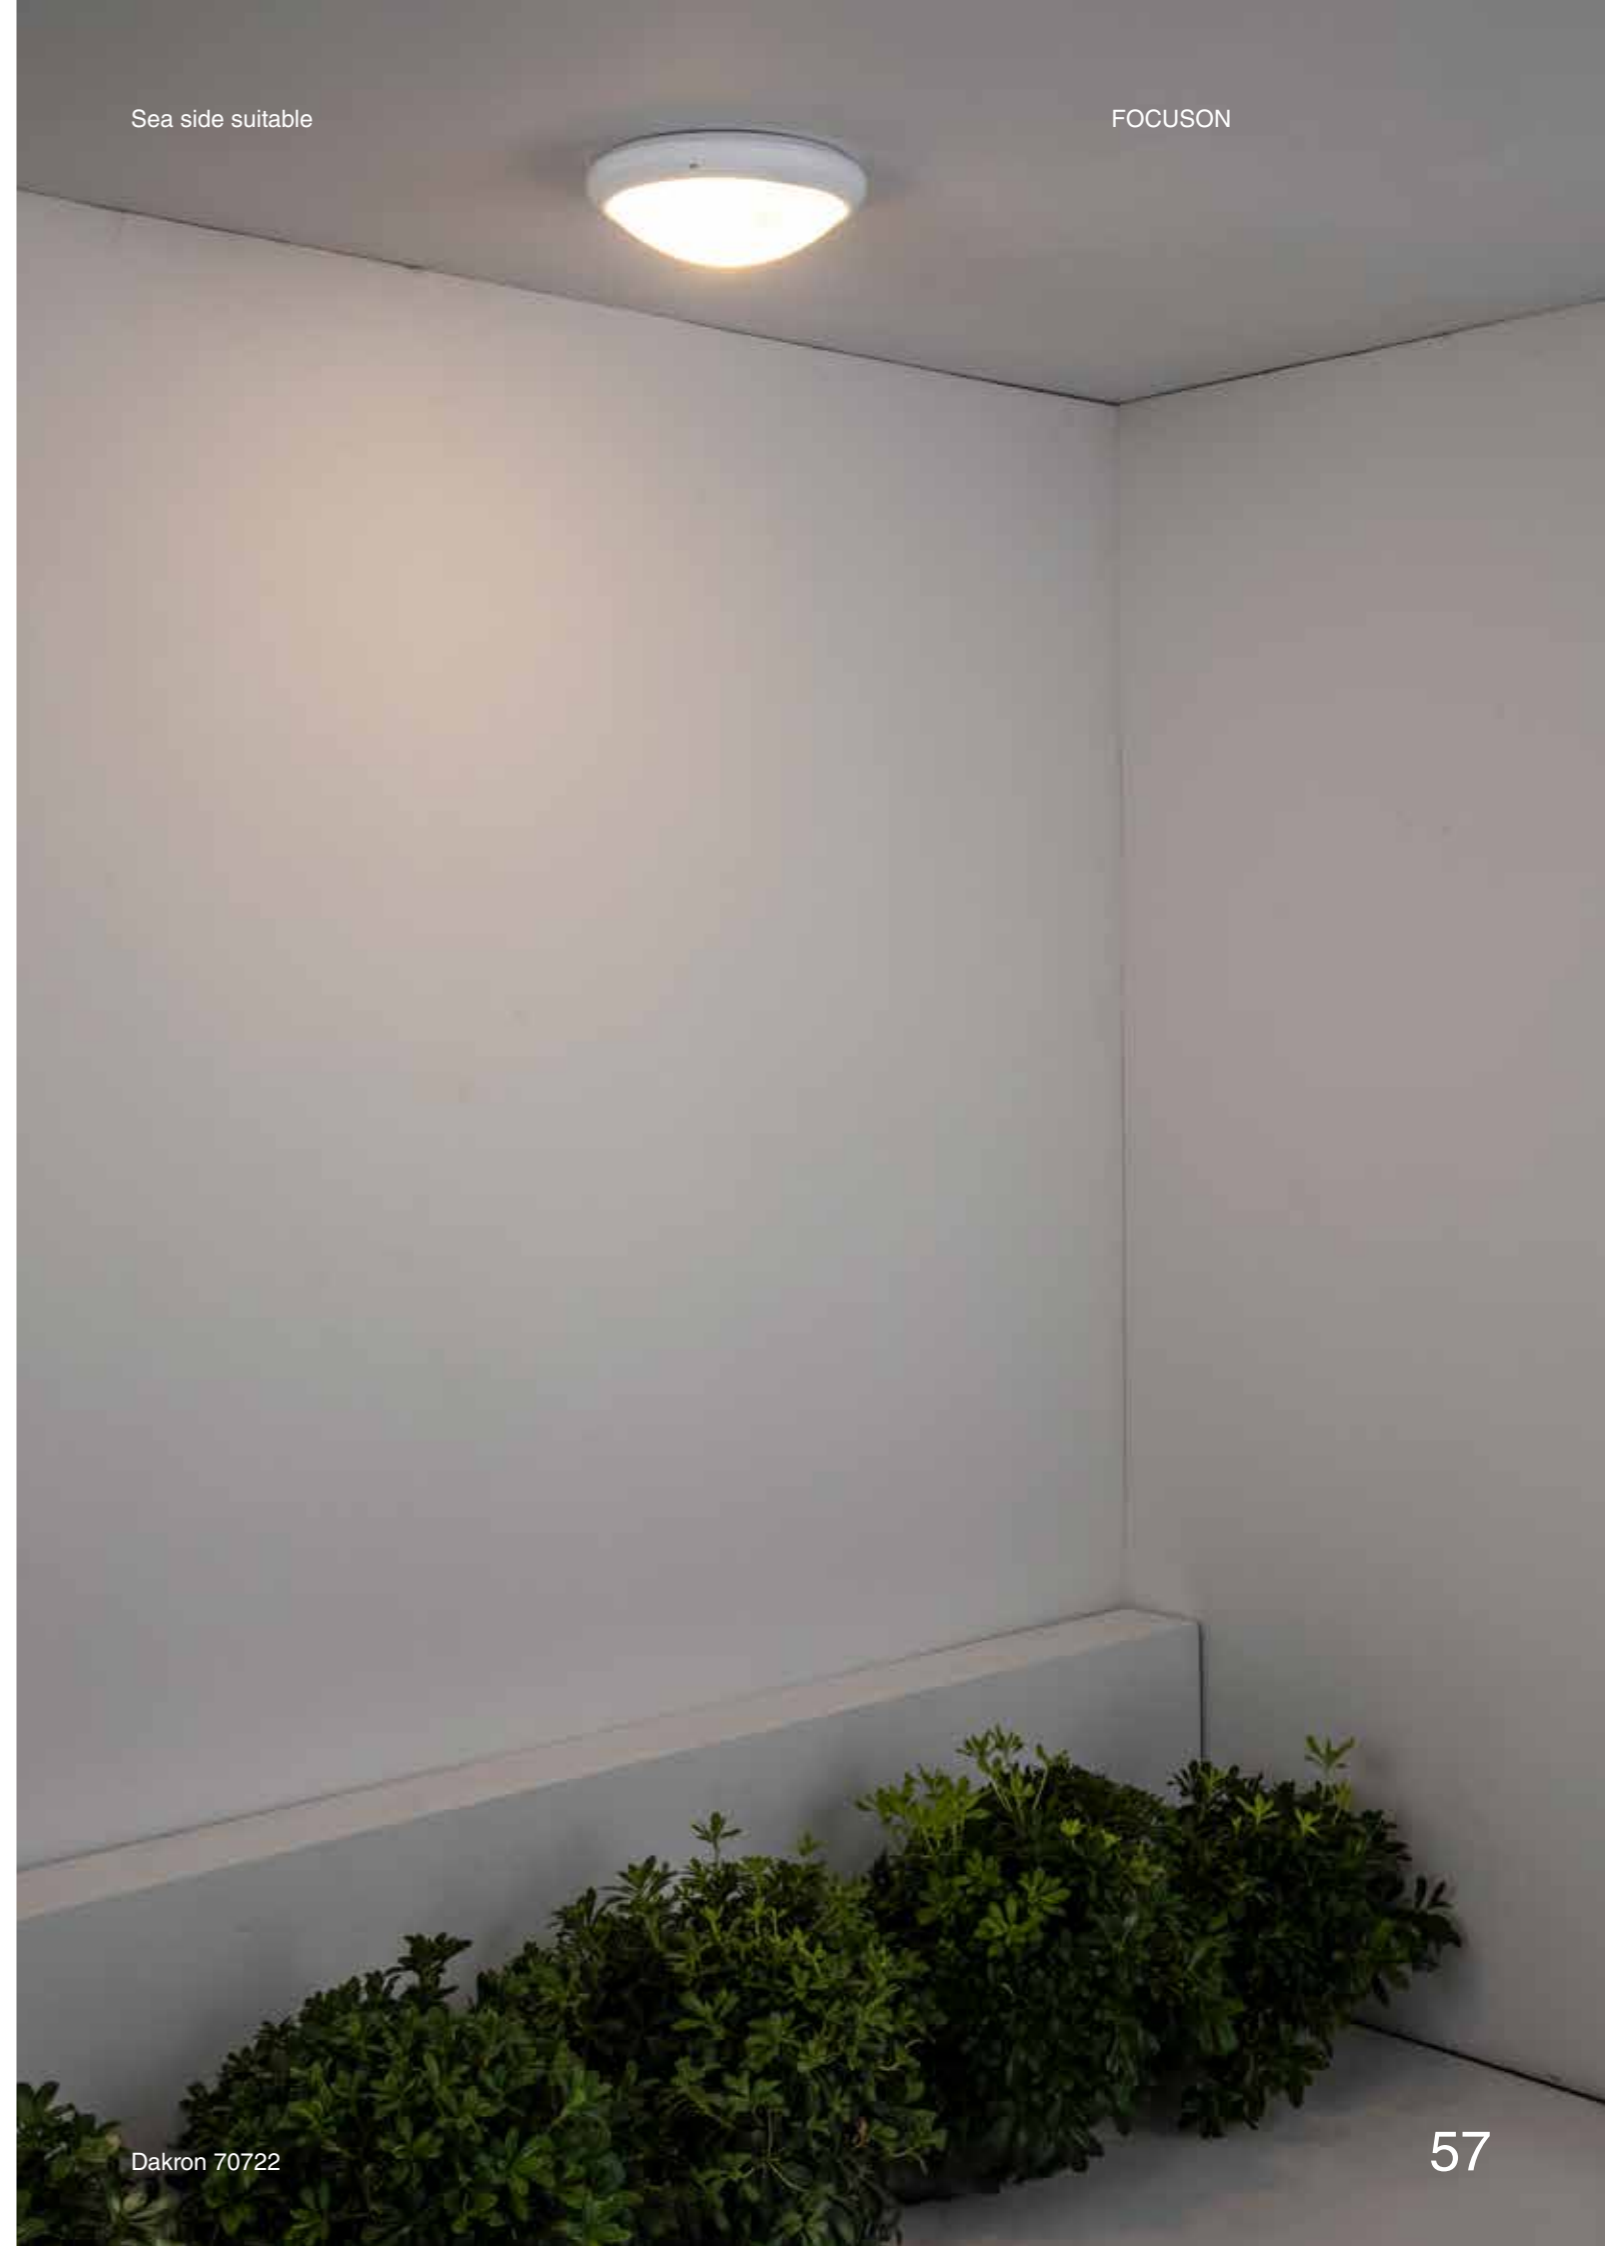

WALL

Grot 160 Wall
Faro Lab


IP55 IK06 incl. SEA SIDE SUITABLE IP68 CONNECTOR



75630 ● Structure Grey
2700K 122lm

75633 ● Structure Grey
3000K 173lm

Material	Structure Concrete
Power	6,5W
Light Source	SMD LED
Class	II
CRI	≥80
Voltage	100V-277V/50/60Hz



Kov R 1L Kov R 2L Kov SQ 1L Kov SQ 2L
6W 2x6W 6W 2x6W



ø80



ø80



80x87



80x87

FINISH

White Black

COLOR TEMPERATURE

2700K CRI80

3000K CRI80

BEAM ANGLE

14°

22°

30°

Sea side suitable

FOCUSON




Kov 71791-235

Kov R 1L

IP65 IK05 incl. SEA SIDE SUITABLE

Material	Structure Aluminium
Power	6W
Light Source	COB LED
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz




Family	Finish	Color T	Beam Angle			
71790- Kov Rounded 1 light	1 White	2 2700K	<table border="1"> <tr><td>1 14°</td></tr> <tr><td>2 22°</td></tr> <tr><td>3 30°</td></tr> </table>	1 14°	2 22°	3 30°
	1 14°					
2 22°						
3 30°						
2 Black	3 3000K					

14°	COB LED 6W CRI>80 747lm 2700K		22°	COB LED 6W CRI>80 785lm 2700K		30°	COB LED 6W CRI>80 835lm 2700K	
	COB LED 6W CRI>80 791lm 3000K			COB LED 6W CRI>80 831lm 3000K			COB LED 6W CRI>80 884lm 3000K	

Kov R 2L

IP65 IK05 incl. SEA SIDE SUITABLE

Material	Structure Aluminium
Power	2x6W
Light Source	COB LED
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz



Family	Finish	Color T	Beam Angle*						
71791- Kov Rounded 2 lights	1 White	2 2700K	<table border="1"> <tr><td>1 14°/14°</td></tr> <tr><td>2 14°/22°</td></tr> <tr><td>3 22°/22°</td></tr> <tr><td>4 22°/30°</td></tr> <tr><td>5 30°/30°</td></tr> <tr><td>6 30°/14°</td></tr> </table>	1 14°/14°	2 14°/22°	3 22°/22°	4 22°/30°	5 30°/30°	6 30°/14°
	1 14°/14°								
2 14°/22°									
3 22°/22°									
4 22°/30°									
5 30°/30°									
6 30°/14°									
2 Black	3 3000K								


*NOTE: You can choose the same or different beam angle for each side of the product

14°	COB LED 2x6W CRI>80 1214lm 2700K		22°	COB LED 2x6WCRI>80 1304lm 2700K		30°	COB LED 2x6W CRI>80 1387lm 2700K	
	COB LED 2x6W CRI>80 1291lm 3000K			COB LED 2x6W CRI>80 1386lm 3000K			COB LED 2x6W CRI>80 1474lm 3000K	

Kov SQ 1L

IP65 IK05 incl. SEA SIDE SUITABLE

Material	Structure Aluminium
Power	6W
Light Source	COB LED
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz




Family	Finish	Color T	Beam Angle
71792- Kov Squared 1 light	1 White	2 2700K	1 14°
	2 Black	3 3000K	2 22°
			3 30°

14°	COB LED W CRI>80 747lm 2700K		22°	COB LED W CRI>80 785lm 2700K		30°	COB LED 6W CRI>80 835lm 2700K	
	COB LED 6W CRI>80 791lm 3000K			COB LED 6W CRI>80 831lm 3000K			COB LED 6W CRI>80 884lm 3000K	

Kov R 1L

IP65 IK05 incl. SEA SIDE SUITABLE

Material	Structure Aluminium
Power	2x6W
Light Source	COB LED
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz



Family	Finish	Color T	Beam Angle
71793- Kov Squared 2 lights	1 White	2 2700K	1 14°/14°
			2 14°/22°
	2 Black	3 3000K	3 22°/22°
			4 22°/30°
			5 30°/30°
			6 30°/14°

*NOTE: You can choose the same or different beam angle for each side of the product

14°	COB LED 2x6W CRI>80 1259lm 2700K		22°	COB LED 2x6W CRI>80 1304lm 2700K		30°	COB LED 2x6W CRI>80 1387lm 2700K	
	COB LED 2x6W CRI>80 1291lm 3000K			COB LED 2x6W CRI>80 1386lm 3000K			COB LED 2x6W CRI>80 1474lm 3000K	


Future
Estudi Ribaudí

IP44 IK08 SEA SIDE SUITABLE



- 71516 Structure Matt White
 Diffuser Opal
- 71517 Structure Dark Grey
 Diffuser Opal

Material	Structure PC Diffuser PC
Power	15W
Light Source	E27 LED
Class	II
Voltage	100V-240V/50/60Hz




View
Estudi Ribaudí

IP54 SEA SIDE SUITABLE



- 71519 Structure Dark Grey
 Diffuser Opal

Material	Structure ABS + PC Diffuser PP
Light Source	1 E27 LED A60 max. 15W
Bulb incl.	No
Recom. Bulb	17463
Class	II



Sea side suitable


FOCUSON



View 71519



Luma Wall
Faro Lab

IP65 IK06 SEA SIDE SUITABLE PIR solar

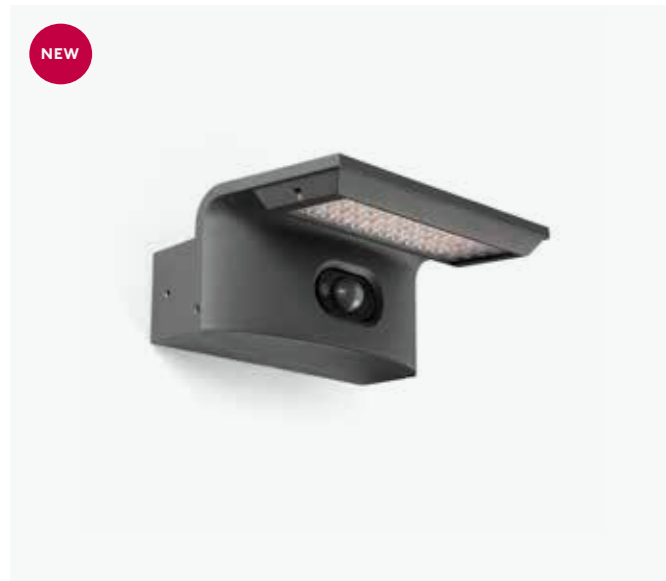

74456 ● Structure Dark Grey
● Diffuser Transparent

Material	Structure Aluminium Diffuser PC
Power	5W
Lumen Output	525,5lm
Light Source	LED MODULE 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Beam angle	120°
Battery	4/6 Charge

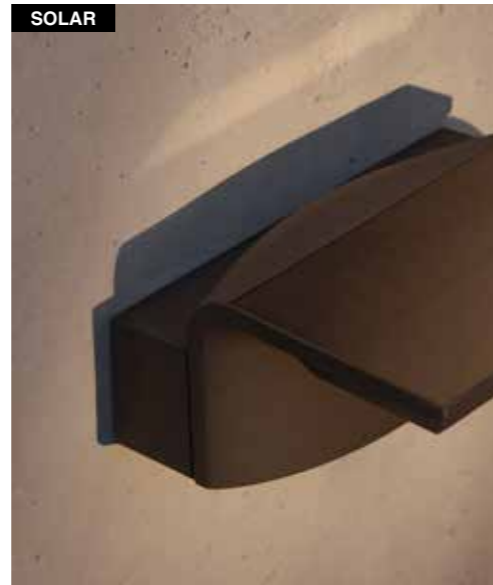

A sustainable savings option
Luma optimizes every resource: solar energy to reduce consumption, advanced optics to maximize performance, and a wireless operation that simplifies installation. Technology, design, and sustainability—all in service of efficiency.



Smart motion sensor
Luma's motion sensor offers three modes: permanent on, total off, or 20% light that ramps up to 100% when motion is detected. An intelligent system that enhances comfort, reduces consumption, and extends battery life.



Block 135
Àlex & Manel Llusçà

IP65 IK06 SEA SIDE SUITABLE



74139 ● Structure Grey
● Diffuser Opal

Material	Structure Concrete
	Diffuser Glass
Light Source	1 E27 LED G45 max. 15W
Bulb incl.	No
Recom. Bulb	17462
Class	I




Tond 2L

IP54 IK06 incl. SEA SIDE SUITABLE



71918 ● Structure Dark Grey
● Diffuser Transparent

Material	Structure Aluminium
	Diffuser Glass
Power	2x6W
Lumen Output	422lm
Light Source	COB LED 3000K
Class	I
CRI	≥80
Voltage	220V-240V/50/60Hz
Beam angle	50°



Sea side suitable

FOCUSON



Block 74139

Mask
Lucid Product Design

IP65

IK06


incl.

SEA SIDE
SUITABLE



71279 ● Structure Dark Grey
● Diffuser Opal

Material	Structure Aluminium
	Diffuser Glass
Power	15W
Lumen Output	550lm
Light Source	SMD LED 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz




Tom 190

IP65 IK10 incl. SEA SIDE SUITABLE



70665 ● Structure Matt White
● Diffuser Opal

Material	Structure ABS Diffuser PC
Power	7W
Lumen Output	400lm
Light Source	SMD LED 3000K
Class	II
CRI	>80
Voltage	220V-240V/50/60Hz



Tom 220

IP65 IK10 incl. SEA SIDE SUITABLE



70682 ● Structure Dark Grey
● Diffuser Opal
70683 ● Structure Matt White
● Diffuser Opal

Material	Structure ABS Diffuser PC
Power	11W
Lumen Output	600lm
Light Source	SMD LED 3000K
Class	II
CRI	>80
Voltage	220V-240V/50/60Hz



Fred 200

IP65 IK10 incl. SEA SIDE SUITABLE



70663 ● Structure Dark Grey
● Diffuser Opal
70664 ● Structure Matt White
● Diffuser Opal

Material	Structure ABS Diffuser PC
Power	7W
Lumen Output	546lm
Light Source	SMD LED 3000K
Class	II
CRI	>80
Voltage	220V-240V/50/60Hz



Fred 245

IP65 IK10 incl. SEA SIDE SUITABLE




70667 ● Structure Dark Grey
● Diffuser Opal
70668 ● Structure Matt White
● Diffuser Opal

Material	Structure ABS Diffuser PC
Power	11W
Lumen Output	873lm
Light Source	SMD LED 3000K
Class	II
CRI	>80
Voltage	220V-240V/50/60Hz




Dune R

IP65 IK07 incl. SEA SIDE SUITABLE DIM

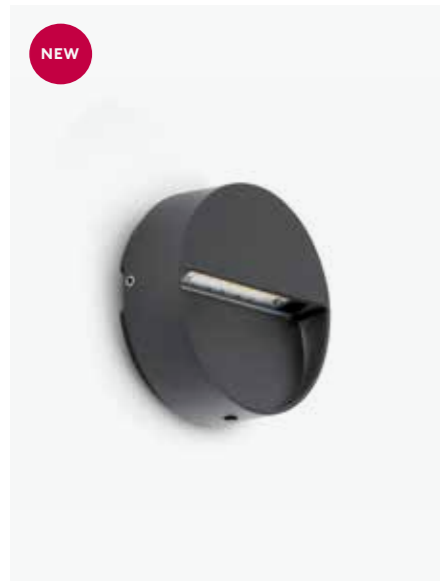


- 71960 ● Structure Dark Grey
● Diffuser Transparent
- 71961 ● Structure Matt White
● Diffuser Transparent
- 71962 ● Structure Rust Brown
● Diffuser Transparent

Material	Structure Aluminium Diffuser PC
Power	3W
Lumen Output	91/100/105/115lm
Light Source	SMD LED 2200/ 2700/ 3200/ 4000K
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz
Beam angle	120°




Dune SQ

IP65 IK07 incl. SEA SIDE SUITABLE DIM

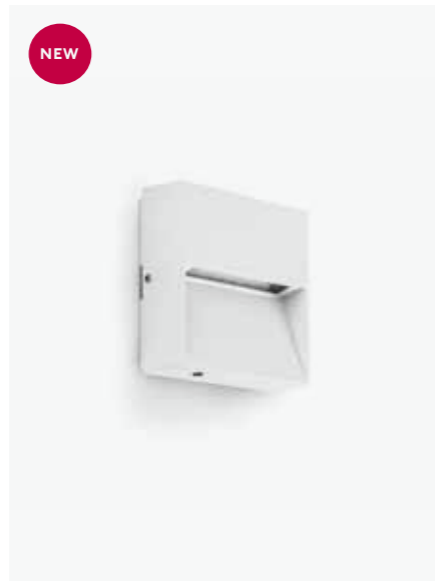


- 71963 ● Structure Dark Grey
● Diffuser Transparent
- 71964 ● Structure Matt White
● Diffuser Transparent
- 71965 ● Structure Rust Brown
● Diffuser Transparent

Material	Structure Aluminium Diffuser PC
Power	3W
Lumen Output	91/98/103/112lm
Light Source	SMD LED 2200/ 2700/ 3200/ 4000K
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz
Beam angle	120°





Dune RCT

IP65 IK07 incl. SEA SIDE SUITABLE DIM

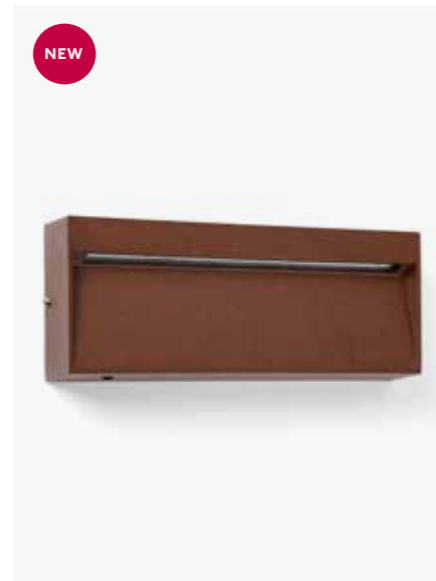

- 71966 ● Structure Dark Grey
● Diffuser Transparent
- 71967 ● Structure Matt White
● Diffuser Transparent
- 71968 ● Structure Rust Brown
● Diffuser Transparent

Material	Structure Aluminium Diffuser PC
Power	6W
Lumen Output	111/121/127/139lm
Light Source	SMD LED 2200/ 2700/ 3200/ 4000K
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz
Beam angle	120°

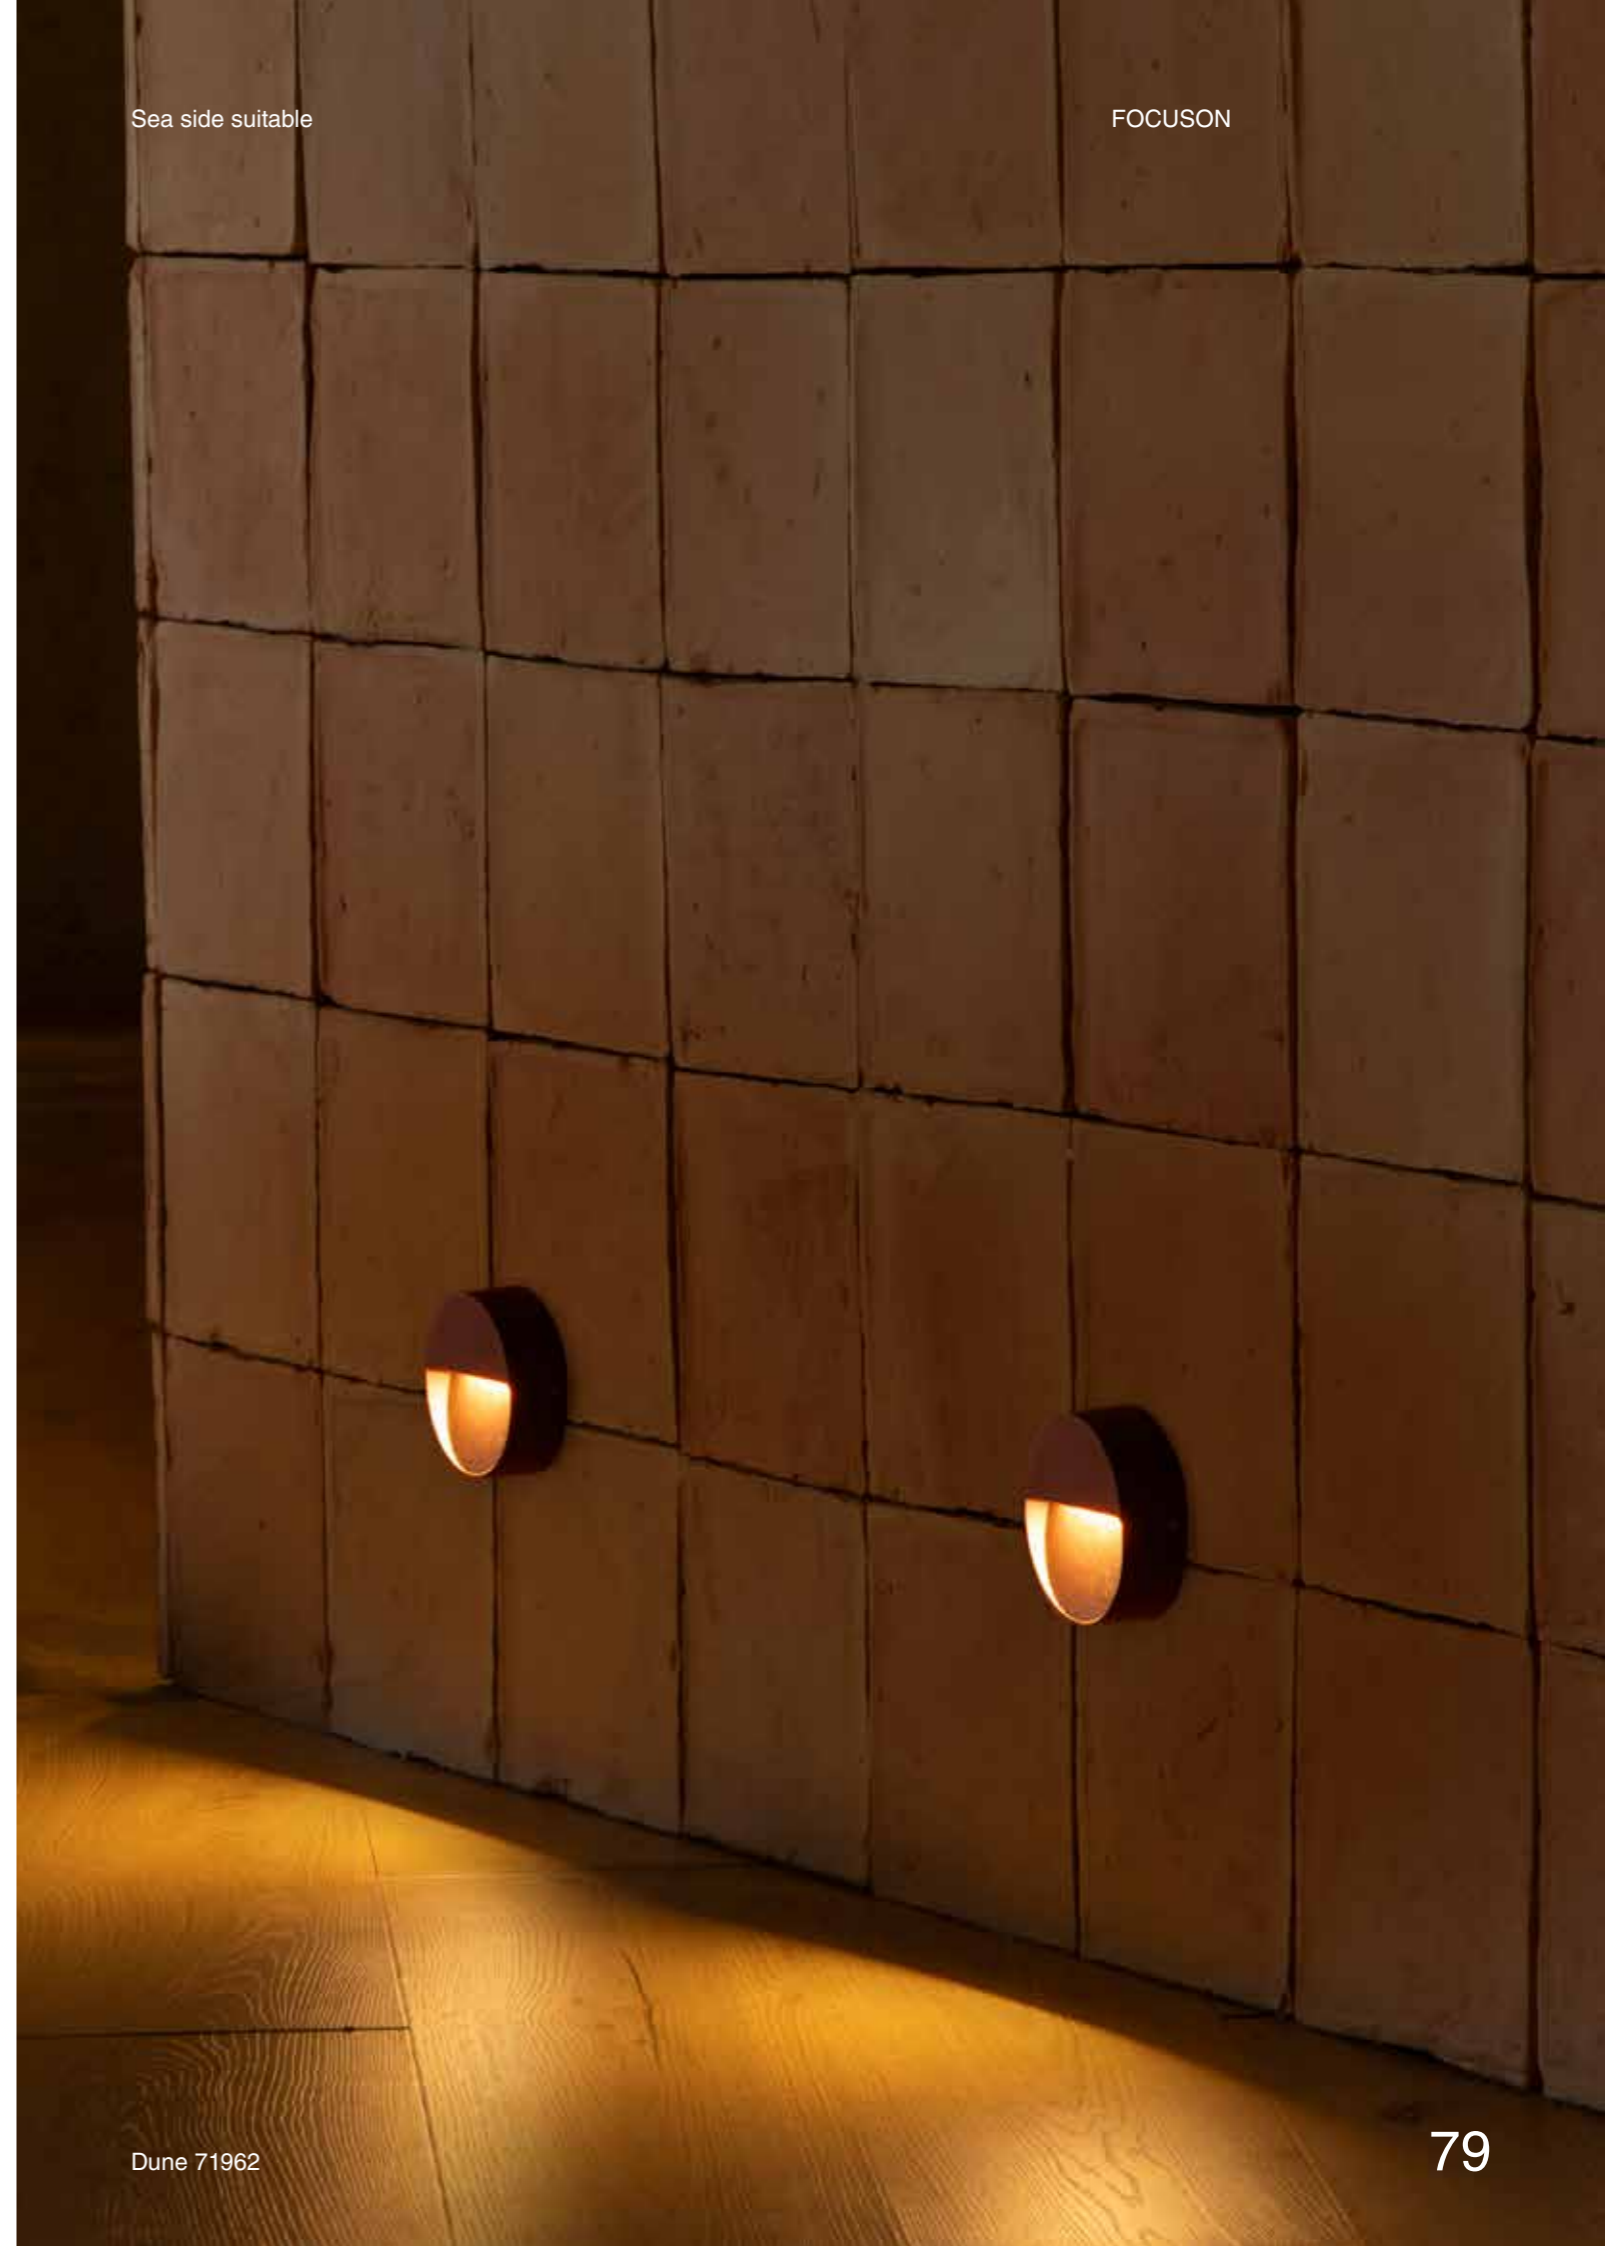


Grant R

IP65 IK10 incl. SEA SIDE SUITABLE



70656 ● Structure Dark Grey
● Diffuser Transparent

Material	Structure ABS
	Diffuser PC
Power	1W
Lumen Output	65lm
Light Source	SMD LED 3000K
Class	II
CRI	>80
Voltage	100V-240V/50/60Hz
Beam angle	120°




Grant SQ

IP65 IK10 incl. SEA SIDE SUITABLE



70655 ● Structure Dark Grey
● Diffuser Transparent

Material	Structure ABS
	Diffuser PC
Power	1W
Lumen Output	65lm
Light Source	SMD LED 3000K
Class	II
CRI	>80
Voltage	100V-240V/50/60Hz
Beam angle	120°




Drak

IP44 IK08 incl. SEA SIDE SUITABLE




72330 ● Structure Brass
● Diffuser Transparent

Material	Structure Aluminium
	Diffuser PMMA
Power	4,5W
Lumen Output	160lm
Light Source	SMD LED 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz



Sea side suitable

FOCUSON

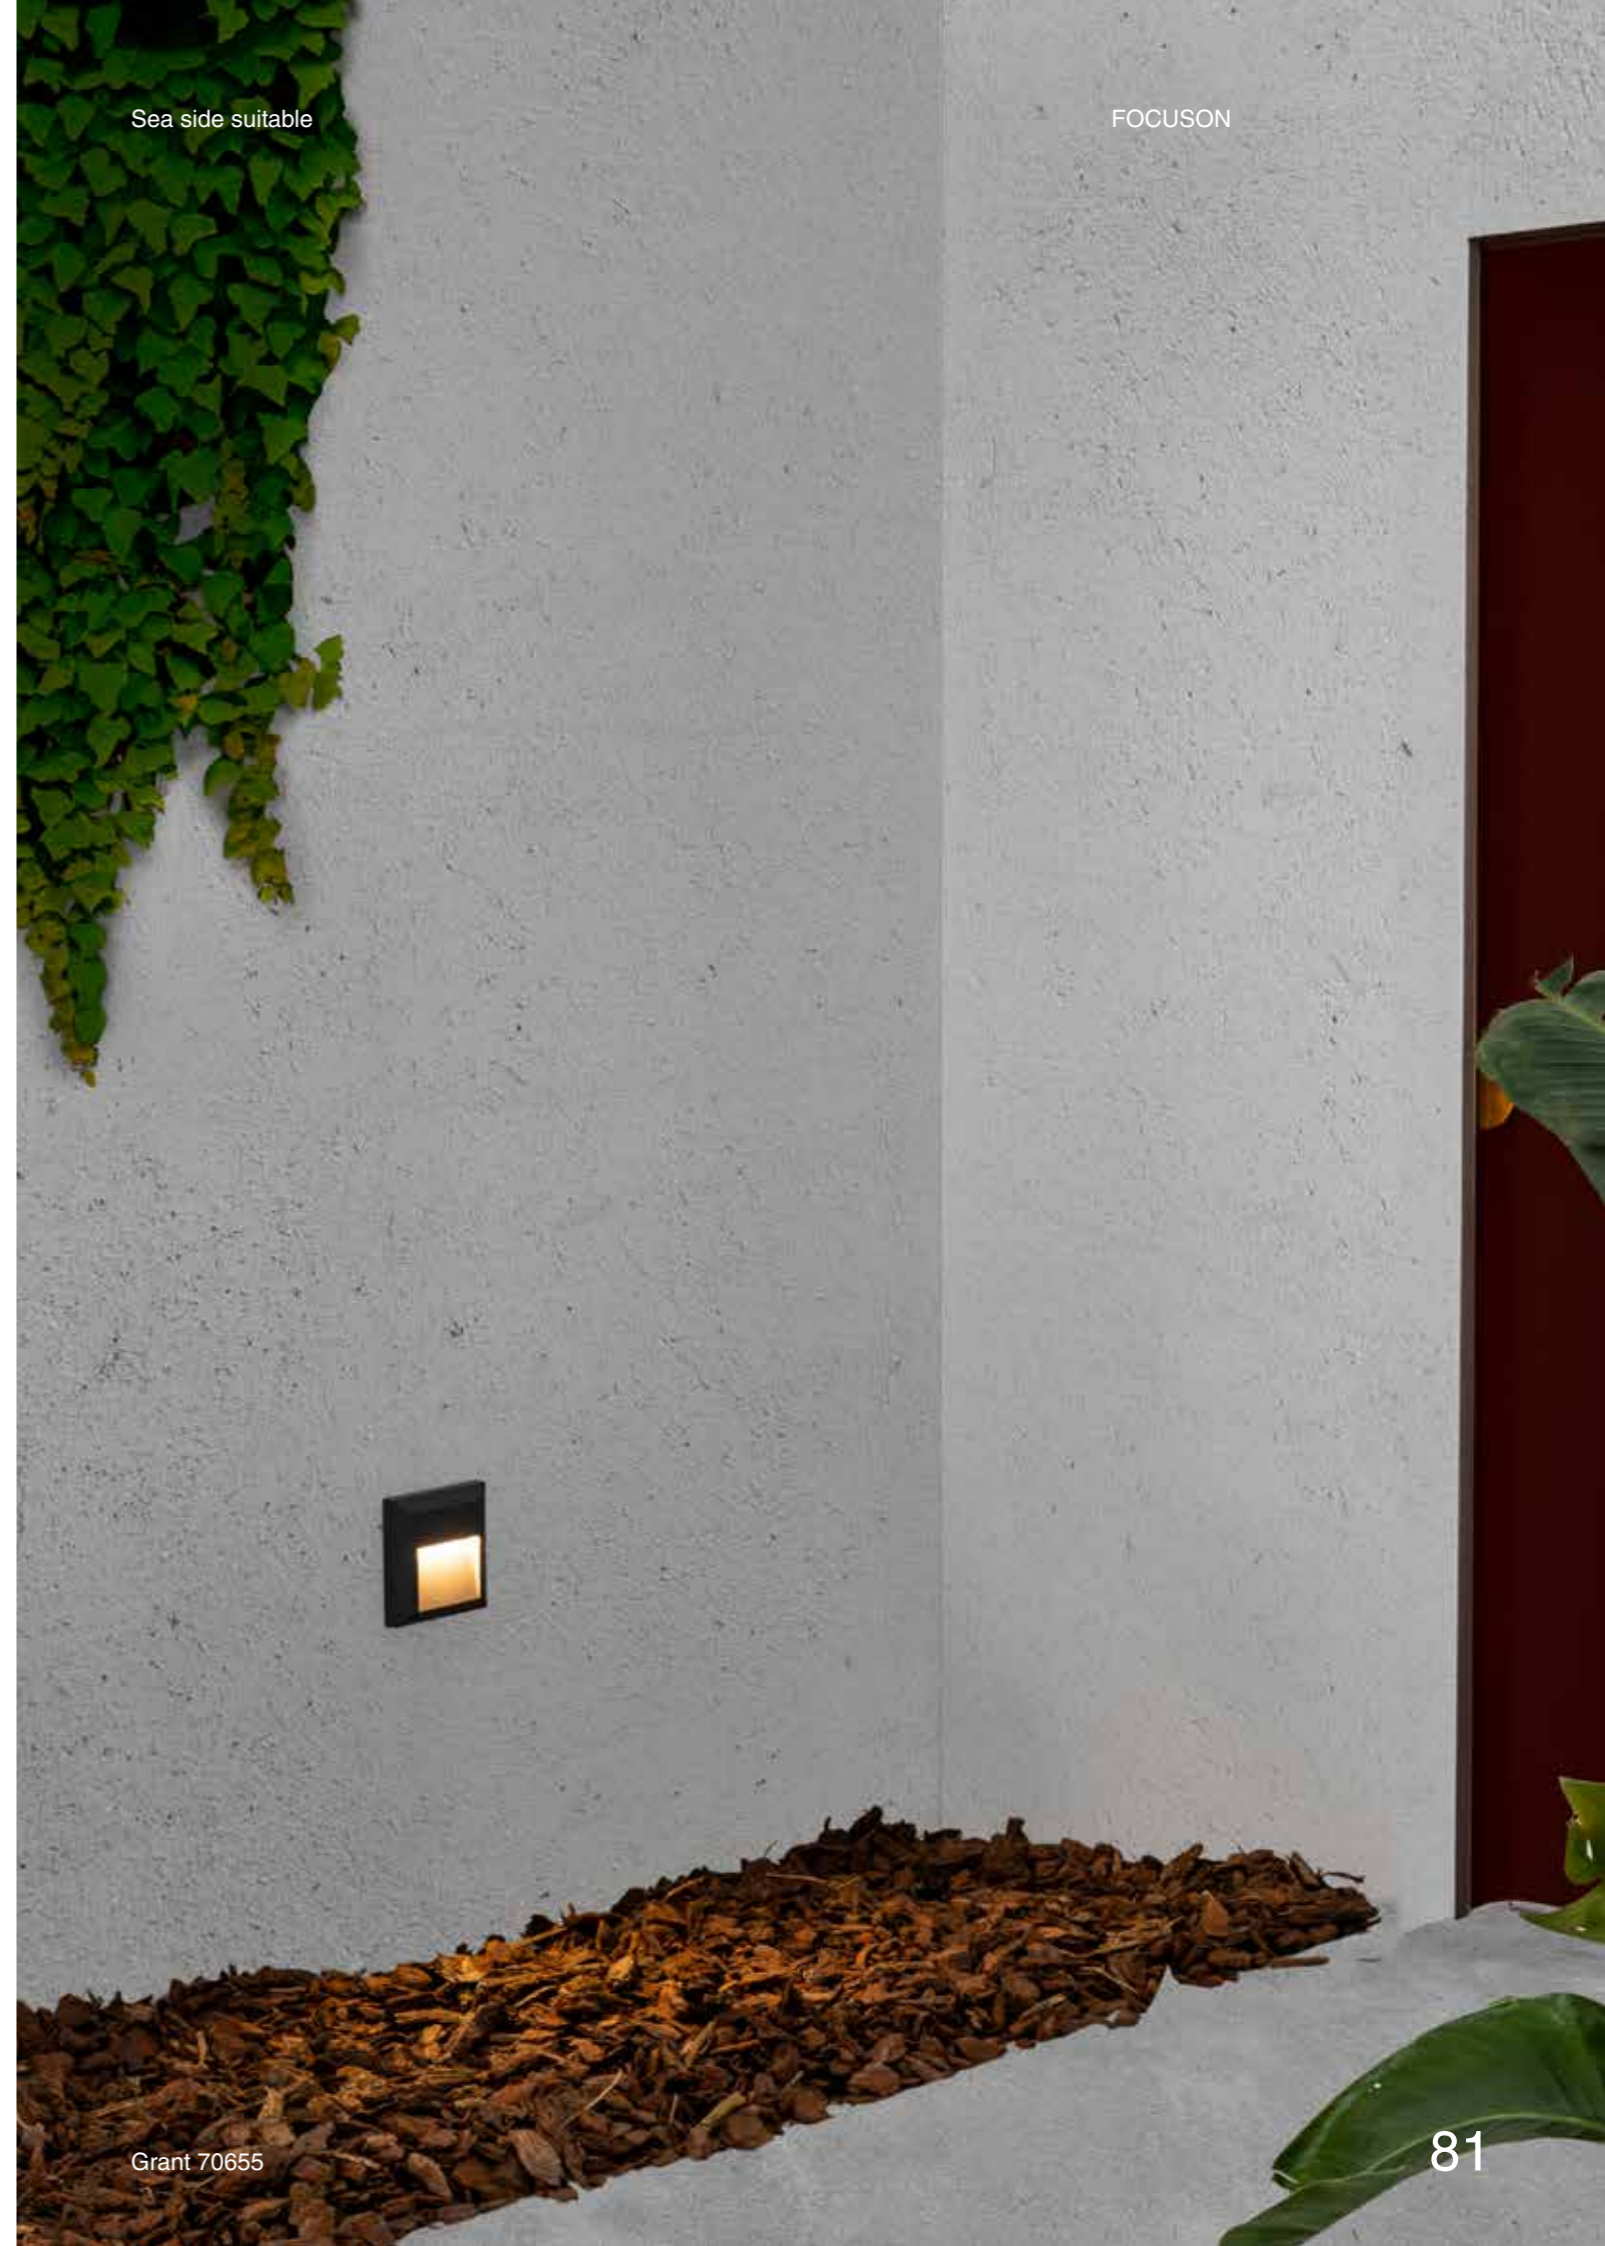

Grant 70655


Must 96

IP65 IK10 incl. SEA SIDE SUITABLE



70657 ● Structure Dark Grey
● Diffuser Transparent

Material	Structure ABS Diffuser PC
Power	2W
Lumen Output	101lm
Light Source	SMD LED 3000K
Class	II
CRI	>80
Voltage	220V-240V/50/60Hz




Must 158

IP65 IK10 incl. SEA SIDE SUITABLE



70658 ● Structure Dark Grey
● Diffuser Transparent

Material	Structure ABS Diffuser PC
Power	3W
Lumen Output	161lm
Light Source	SMD LED 3000K
Class	II
CRI	>80
Voltage	220V-240V/50/60Hz




Must 217

IP65 IK10 incl. SEA SIDE SUITABLE




70659 ● Structure Dark Grey
● Diffuser Transparent

Material	Structure ABS Diffuser PC
Power	4W
Lumen Output	276lm
Light Source	SMD LED 3000K
Class	II
CRI	>80
Voltage	220V-240V/50/60Hz



Sea side suitable

FOCUSON

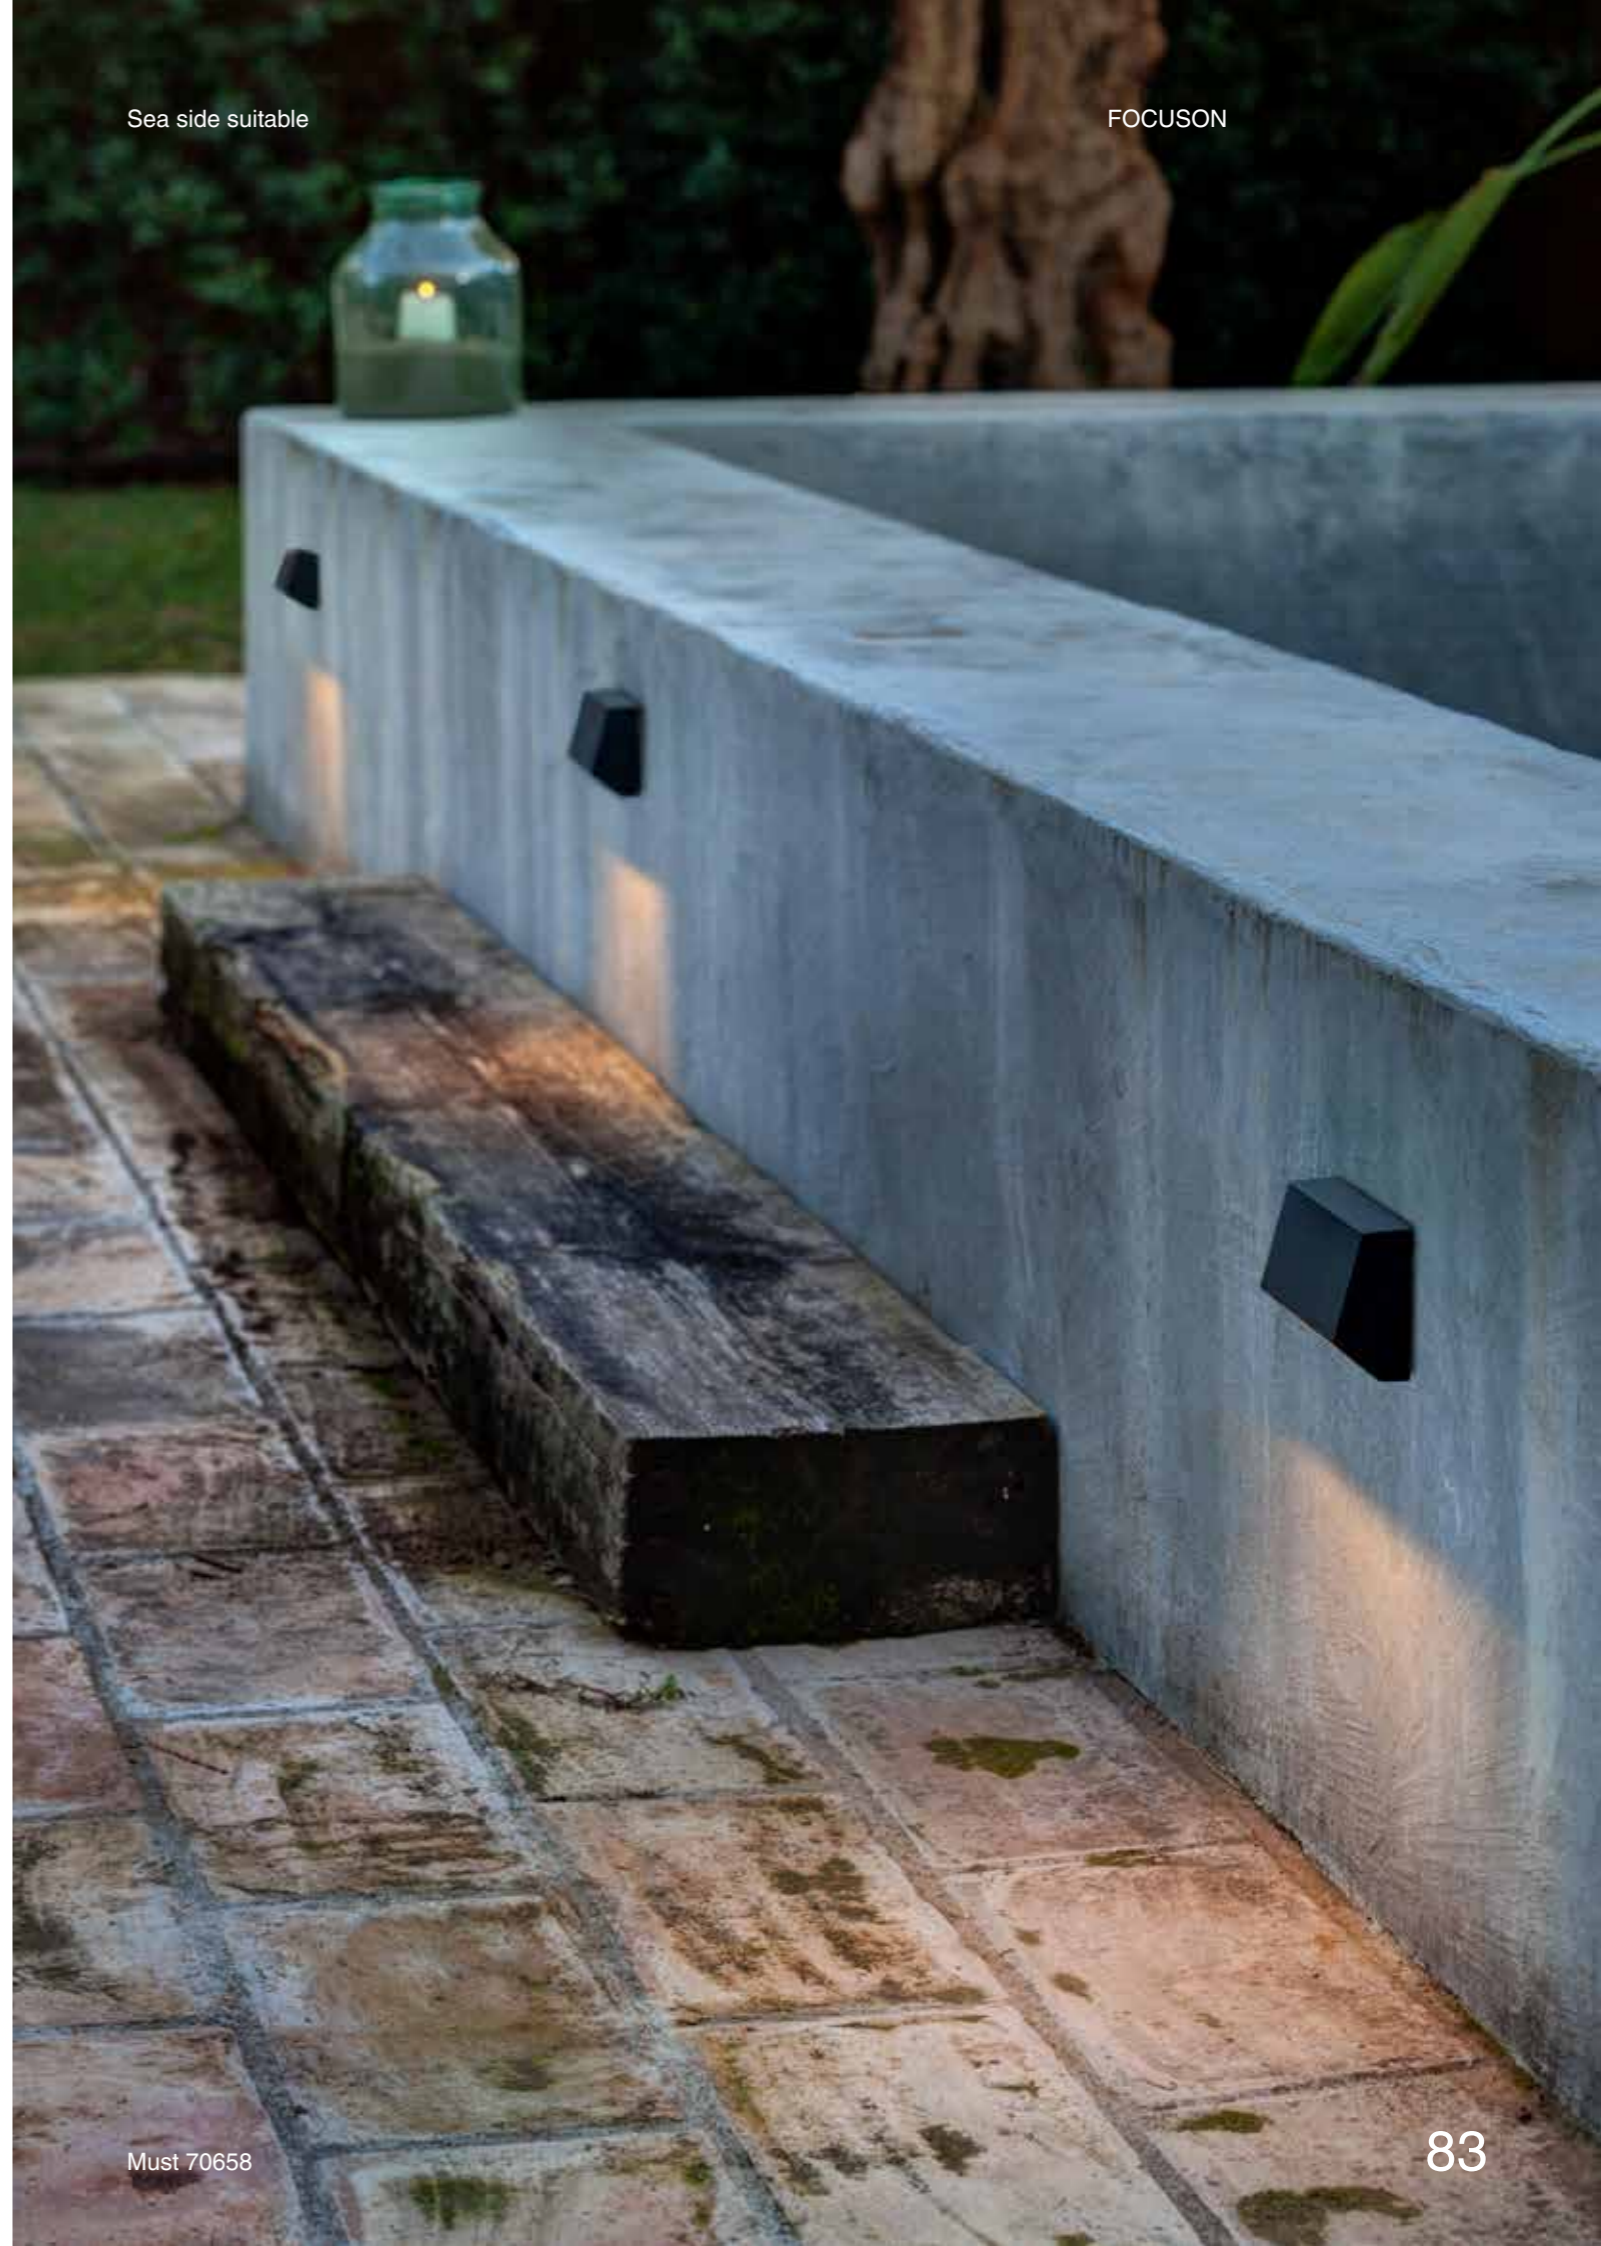

Must 70658

RECESSED


Geiser 130 Wallwasher

IP67 IK08 incl. SEA SIDE SUITABLE incl.



70311 ● Structure Satin Stainless

Material	Structure Stainless Steel 316L + Aluminium
Power	7,5W
Lumen Output	283lm
Light Source	COB LED 3000K
Class	II
CRI	>80
Voltage	220V-240V/50/60Hz
Cut out	ø120x130mm
Resistance	1000Kg




Geiser 180 Wallwasher

IP67 IK08 incl. SEA SIDE SUITABLE incl.




70312 ● Structure Satin Stainless

Material	Structure Stainless Steel 316L + Aluminium
Power	12,5W
Lumen Output	464lm
Light Source	COB LED 3000K
Class	II
CRI	>80
Voltage	220V-240V/50/60Hz
Cut out	ø164x190mm
Resistance	1000Kg



Sea side suitable

FOCUSON

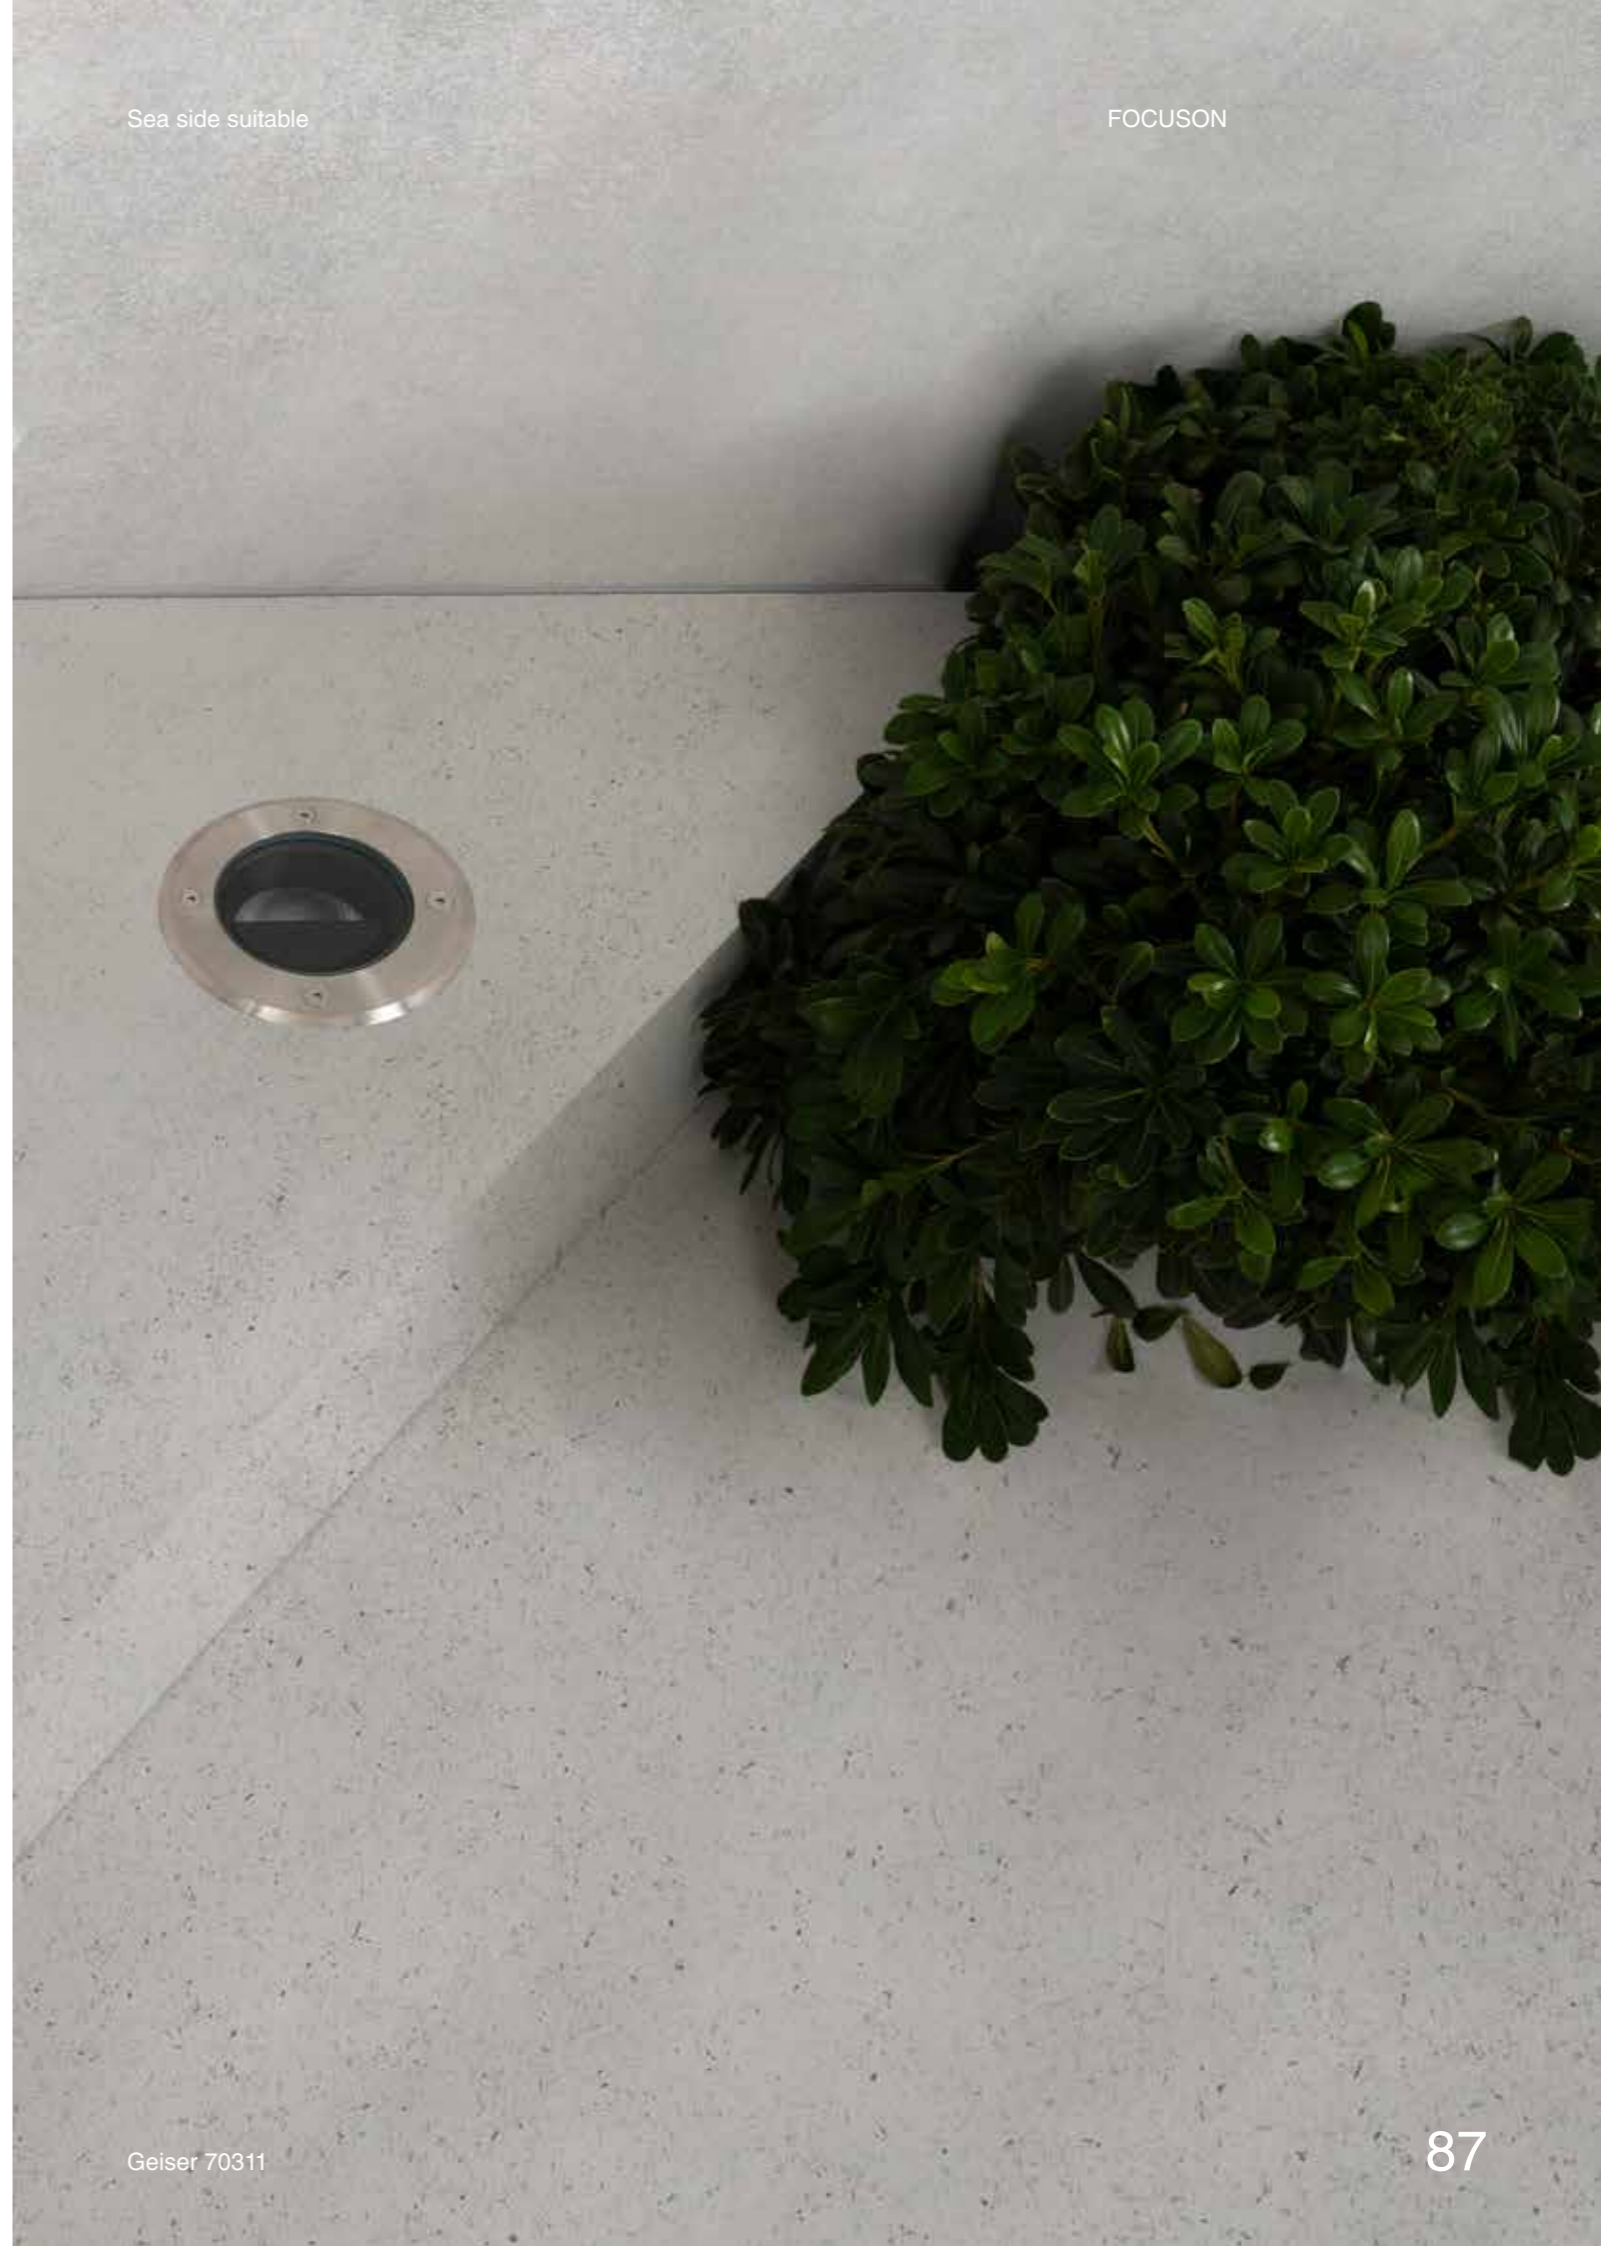

Geiser 70311



Geiser 130

IP67 IK08 incl. SEA SIDE SUITABLE 25° 20° incl.



- 70302 10° 370lm Structure Satin Stainless + Matt Black Diffuser Transparent
- 70303 38° 393lm Structure Satin Stainless + Matt Black Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	6,5W
Light Source	COB LED 3000K
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz
Cut out (mm)	ø90x135mm
Resistance	2000Kg

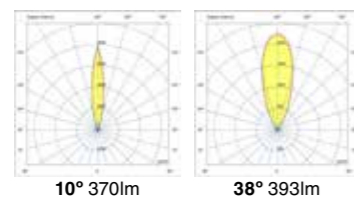



Geiser 180

IP67 IK08 incl. SEA SIDE SUITABLE 25° 20° incl.



- 70308 10° 1066lm Structure Satin Stainless Diffuser Transparent
- 70309 38° 968lm Structure Satin Stainless Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	12,5W
Light Source	COB LED 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Cut out (mm)	ø165x190mm
Resistance	2000Kg

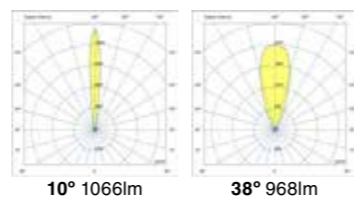


Geiser 130 GU10

IP67 IK08 SEA SIDE SUITABLE 25° 20° incl.



- 70310 ● Structure Satin Stainless
- Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Light Source	1 GU10 LED PAR16 max. 8W
Bulb incl.	No
Recom. Bulb	17334
Class	I
Cut out	ø125x135mm
Resistance	2000Kg





Geiser 260

IP67 IK08 incl. SEA SIDE SUITABLE 20° incl.



- 70306 ● Structure Satin Stainless + Matt Black
- Diffuser Transparent
- 70307 ● Structure Satin Stainless + Matt Black
- Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	29W
Light Source	COB LED 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Cut out (mm)	ø200x265mm
Resistance	2000Kg

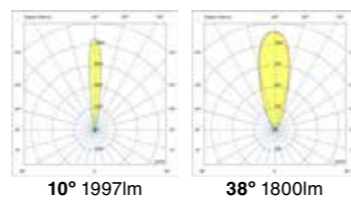



Geiser 130 Ceiling

IP67 IK08 incl. SEA SIDE SUITABLE no incl.




70305 ●● Structure Satin Stainless + Matt Black
● Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	6,5W
Lumen Output	242lm
Light Source	COB LED 3000K
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz
Beam angle	38°
Cut out	ø80x120mm




Geiser 130 GU10 Ceiling

IP67 IK08 SEA SIDE SUITABLE 40° no incl.

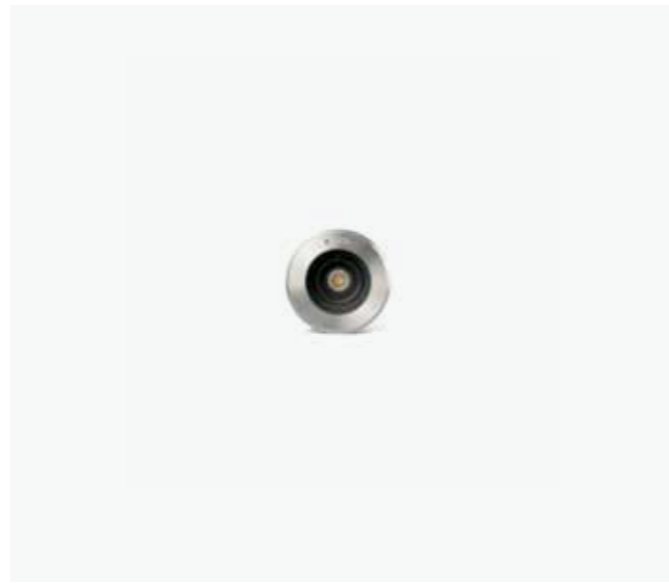

70304 ●● Structure Satin Stainless + Matt Black
● Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Light Source	1 GU10 LED PAR16 max. 8W
Bulb incl.	No
Recom. Bulb	17324
Class	I
Cut out	ø80x120mm





Suria 120

IP67 IK08 incl. SEA SIDE SUITABLE incl.



- 70588 24° 319lm
● Structure Satin Stainless + Matt Black
● Diffuser Transparent
- 70592N 60° 272lm
● Structure Satin Stainless + Matt Black
● Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	3W
Light Source	COB LED 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Cut out (mm)	ø100x95mm
Resistance	1000Kg

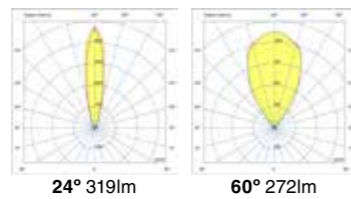



Suria 180

IP67 IK08 incl. SEA SIDE SUITABLE incl.



- 70589 24° 981lm
● Structure Satin Stainless + Matt Black
● Diffuser Transparent
- 70593N 60° 1144lm
● Structure Satin Stainless + Matt Black
● Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	12W
Light Source	COB LED 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Cut out (mm)	ø165x125mm
Resistance	1000Kg

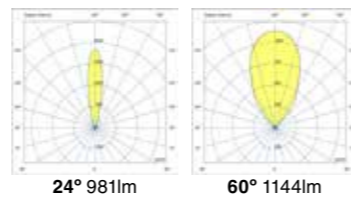

Sea side suitable

FOCUSON



Suria 70589



Suria 220

IP67 IK08 incl. SEA SIDE SUITABLE incl.



- 70586 24° 2200lm
 Structure Satin Stainless + Matt Black
 Diffuser Transparent
- 70587 60° 1270lm
 Structure Satin Stainless + Matt Black
 Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium Diffuser Glass
Power	24W
Light Source	COB LED 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Cut out (mm)	ø200x130mm
Resistance	1000Kg

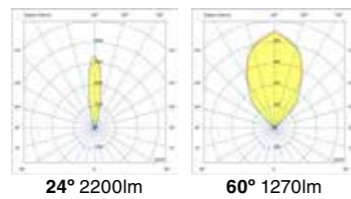


Sea side suitable

FOCUSON



Grund 21



IP67 IK07 no incl. SEA SIDE SUITABLE incl.

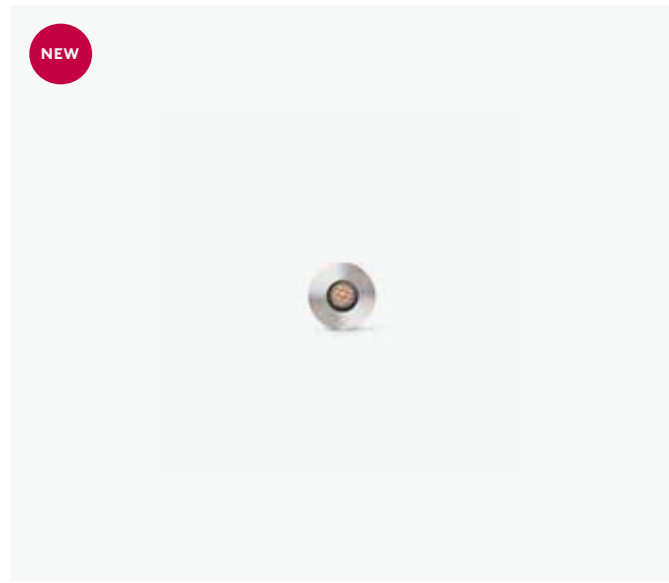

- 70851** ● Structure Brushed Stainless Steel
2700K 37lm
● Diffuser Transparent
- 70852** ● Structure Black
2700K 38,4lm
● Diffuser Transparent
- 70853** ● Structure Brushed Stainless Steel
3000K 37lm
● Diffuser Transparent
- 70854** ● Structure Black
3000K 38,4lm
● Diffuser Transparent


Material	Structure Stainless Steel
	Diffuser Glass
Power	1W
Light Source	LED MODULE
Class	III
CRI	92
Voltage	24VDC
Voltage	220
Beam angle	36°
Cut out	16mm
Resistance	1000Kg

*Drivers info pag. 478



Grund 37



IP67 no incl. SEA SIDE SUITABLE incl.

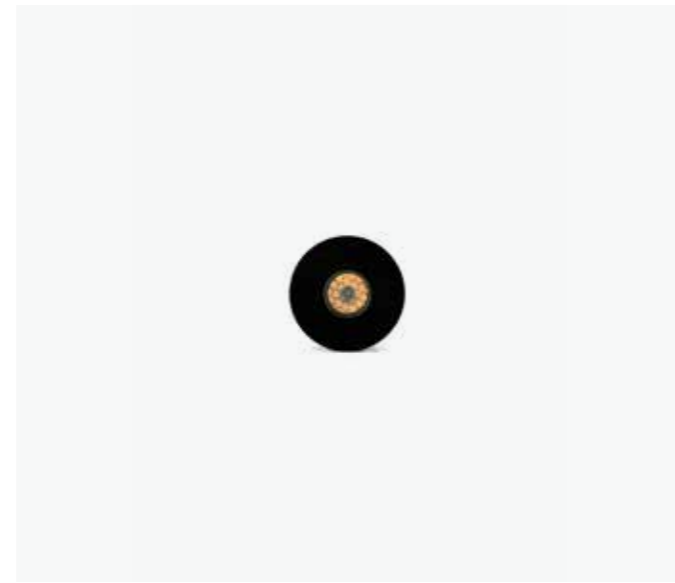

- 70726** ● Structure Satin Stainless + Matt Black
3000K 110lm
● Diffuser Transparent
- 70730** ● Structure Anodized Black + Matt Black
3000K 110lm
● Diffuser Transparent
- 70733** ● Structure Satin Stainless
2700K 77lm
● Diffuser Transparent
- 70735** ● Structure Anodized Black
2700K 77lm
● Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	2W
Light Source	SMD LED
Class	III
CRI	>90
Beam angle	15°
Cut out	ø32mm
Resistance	1000Kg

*Drivers info pag. 478



Grund 80



IP67 no incl. SEA SIDE SUITABLE incl.



- 70731 3000K 420lm ●● Structure Anodized Black + Anodized Black
● Diffuser Transparent
- 70736 2700K 191lm ●● Structure Anodized Black
● Diffuser Transparent
- 70728 3000K 272lm ●● Structure Satin Stainless + Matt Black
● Diffuser Transparent
- 70734 2700K 191lm ●● Structure Satin Stainless
● Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium Diffuser Glass
Power	7W
Light Source	COB LED
Class	III
CRI	>90
Beam angle	36°
Cut out	ø60mm
Resistance	1000Kg

*Drivers info pag. 478



Grund 92




IP67 no incl. SEA SIDE SUITABLE incl.



- 70732 3000K 640lm ●● Structure Anodized Black + Matt Black
● Diffuser Transparent
- 70729 3000K 640lm ●● Structure Satin Stainless + Matt Black
● Diffuser Transparent


Material	Structure Stainless Steel 316L + Aluminium Diffuser Glass
Power	13W
Light Source	COB LED
Class	III
CRI	>90
Beam angle	36°
Cut out	ø68mm
Resistance	1000Kg

*Drivers info pag. 478

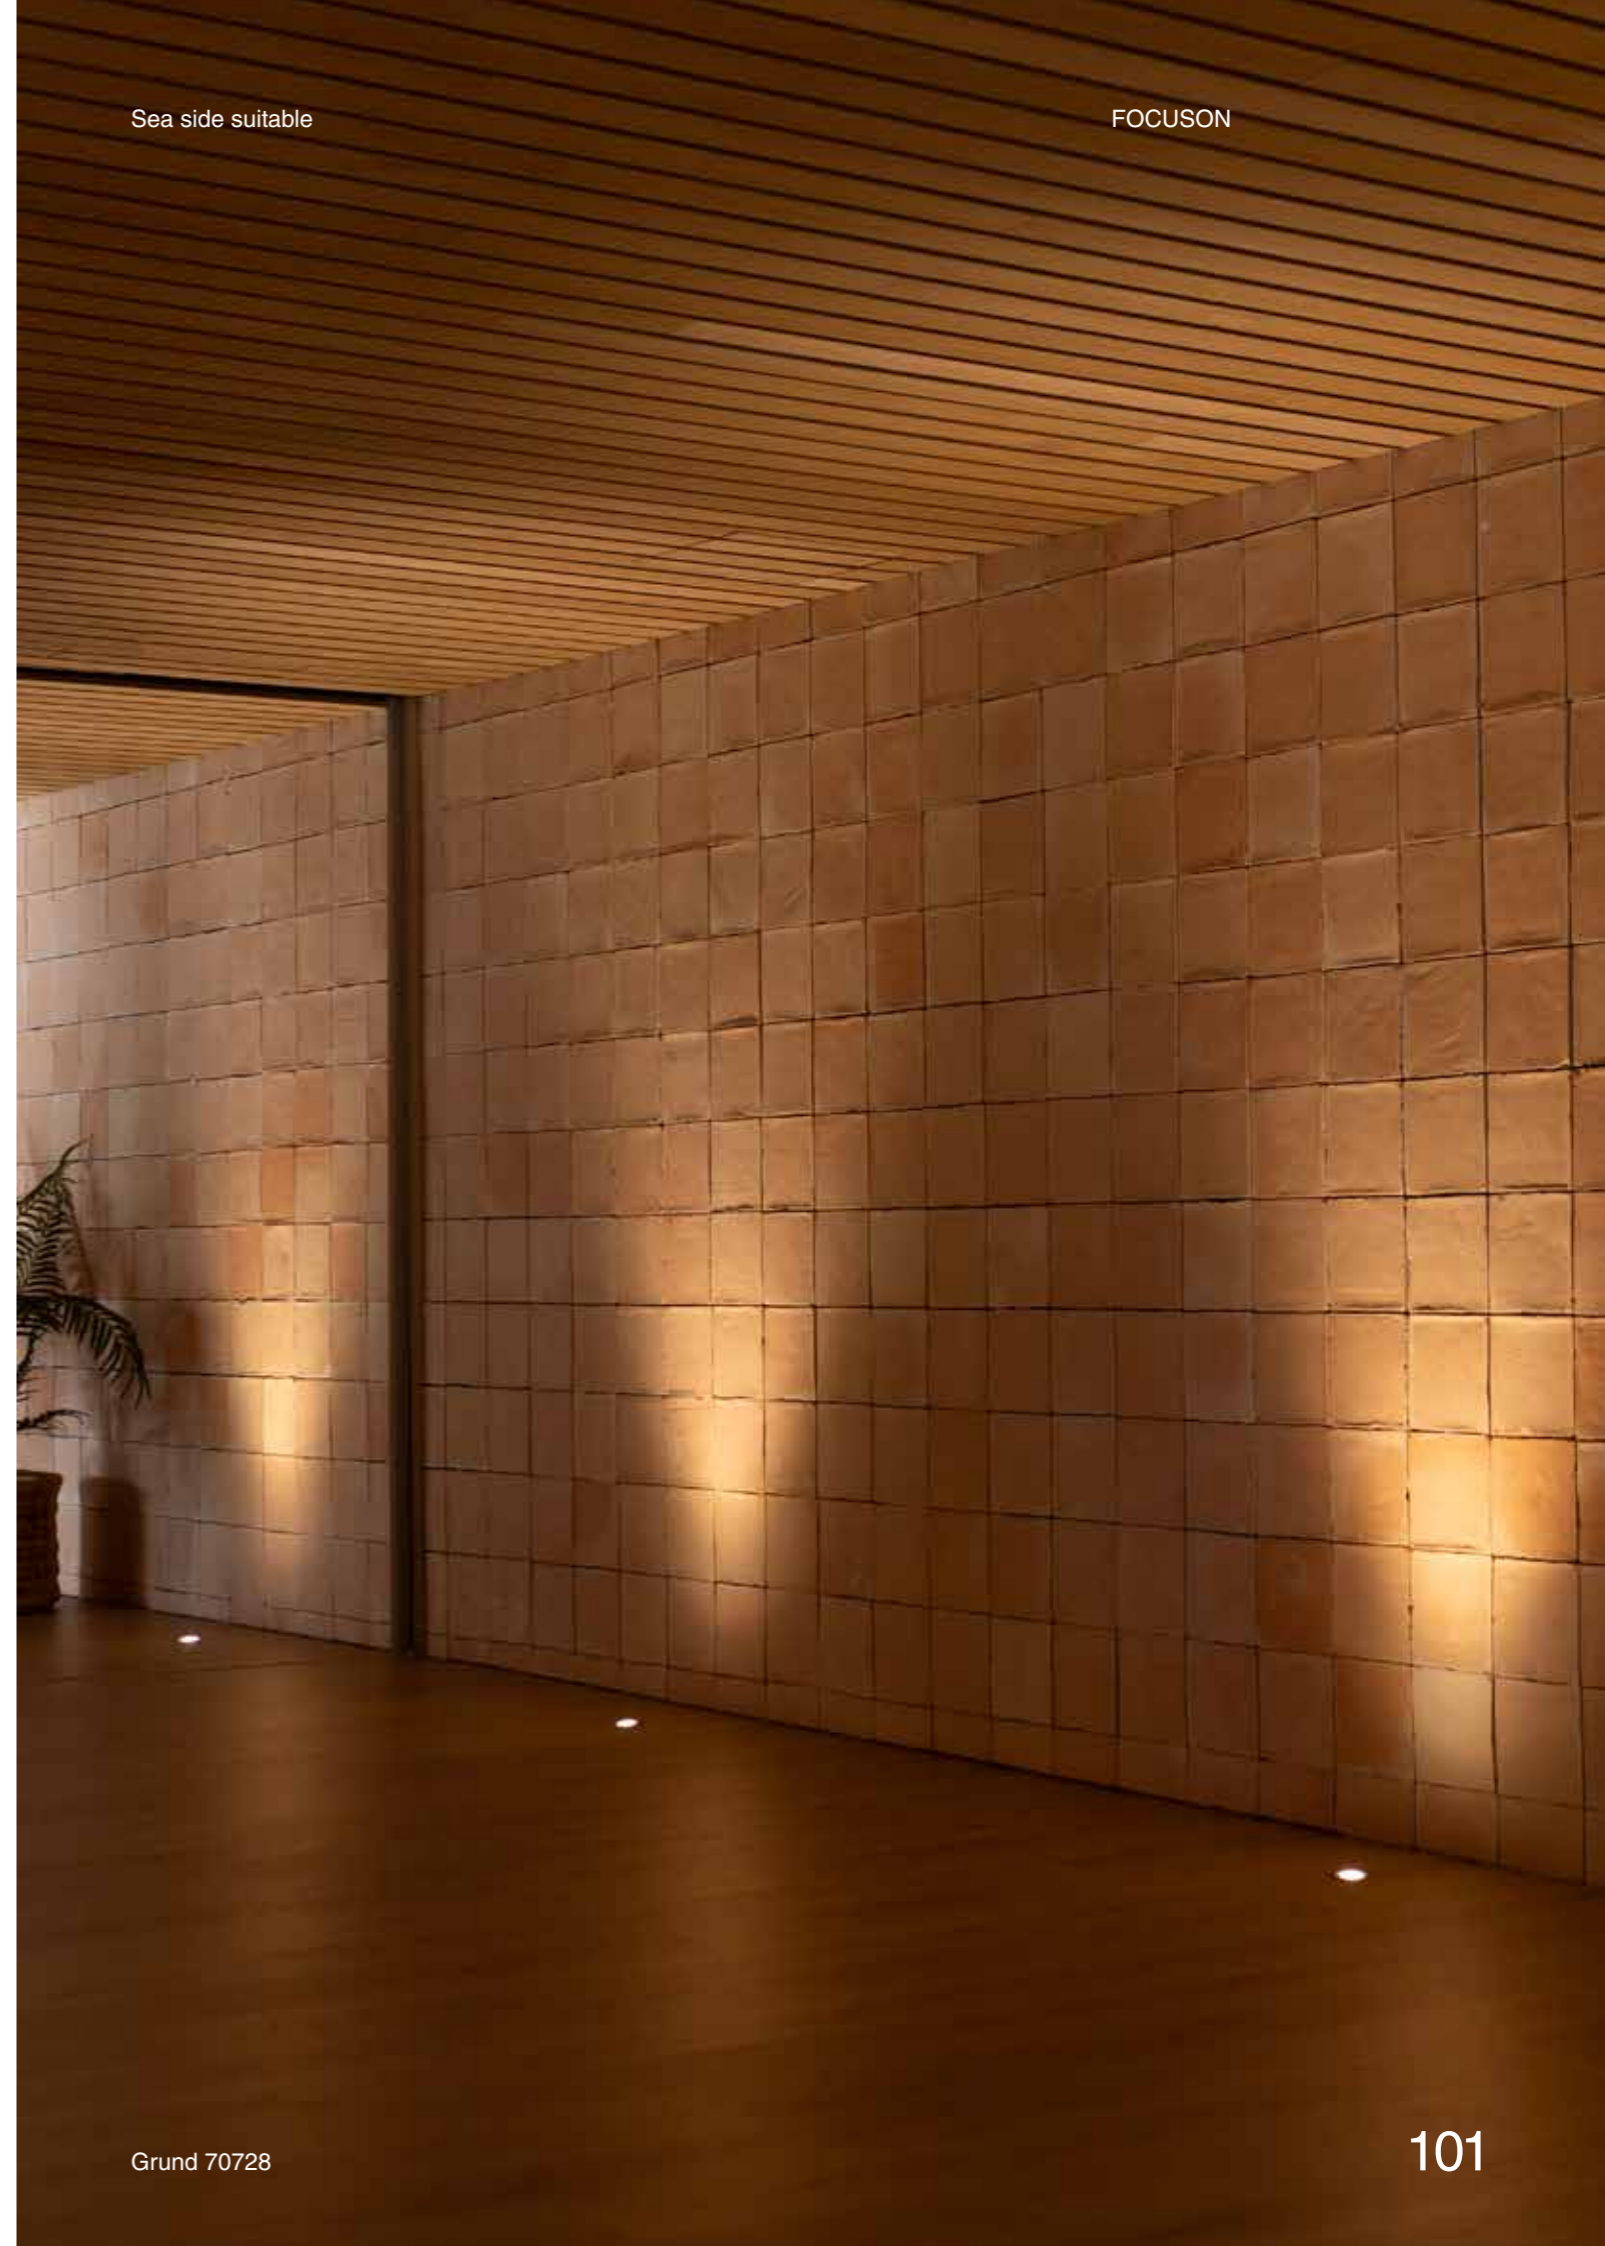

Grund 80 Wallwasher


IP67 IK07 no incl. SEA SIDE SUITABLE incl.

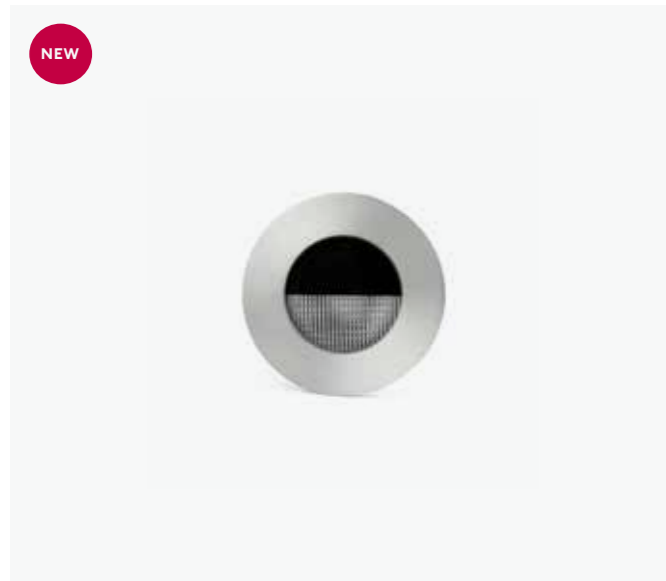

70856 2700K 221lm	● Structure Black ● Diffuser Transparent
70858 3000K 411lm	● Structure Black ● Diffuser Transparent
70855 2700K 214lm	● Structure Brushed Stainless Steel ● Diffuser Transparent
70857 3000K 400lm	● Structure Brushed Stainless Steel ● Diffuser Transparent


Material	Structure Aluminium Diffuser Glass
Power	7W
Light Source	LED MODULE
Class	III
CRI	92
Voltage	24VDC
Cut out	60mm
Resistance	1000Kg

*Drivers info pag. 478



Grund 92 Wallwasher


IP67 IK07 no incl. SEA SIDE SUITABLE incl.

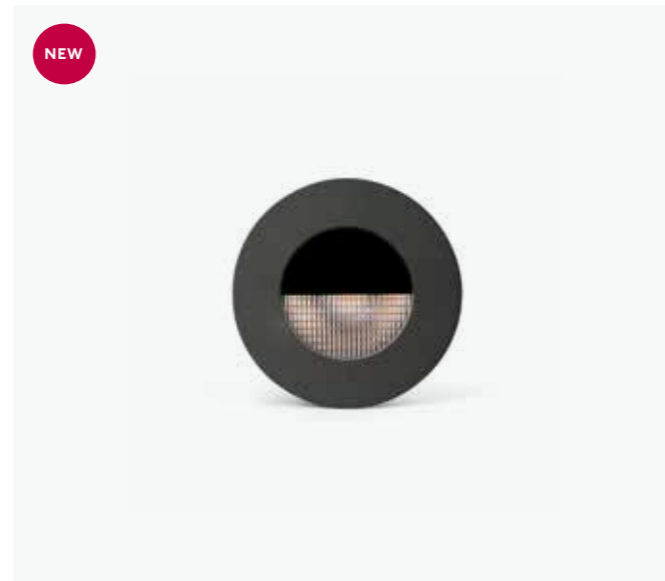

70860 2700K 221lm	● Structure Black ● Diffuser Transparent
70862 3000K 411lm	● Structure Black ● Diffuser Transparent
70859 2700K 214lm	● Structure Brushed Stainless Steel ● Diffuser Transparent
70861 3000K 400lm	● Structure Brushed Stainless Steel ● Diffuser Transparent

Material	Structure Aluminium Diffuser Glass
Power	13W
Light Source	LED MODULE
Class	III
CRI	92
Voltage	24VDC
Cut out	68mm
Resistance	1000Kg

*Drivers info pag. 478



Grund GU10

IP67

IK08

SEA SIDE
SUITABLE




NEW




- | | |
|-------|-----------------------------|
| 70870 | ● Structure Satin Aluminium |
| | ● Diffuser Transparent |
| 70871 | ● Structure Anodized Black |
| | ● Diffuser Transparent |

Material	Structure Stainless Steel
	Diffuser Glass
Light Source	1 GU10 LED max. 5W
Bulb incl.	No
Recom. Bulb	17334
Class	II
Cut out	76mm
Resistance	1000Kg




Sea side suitable

FOCUSON

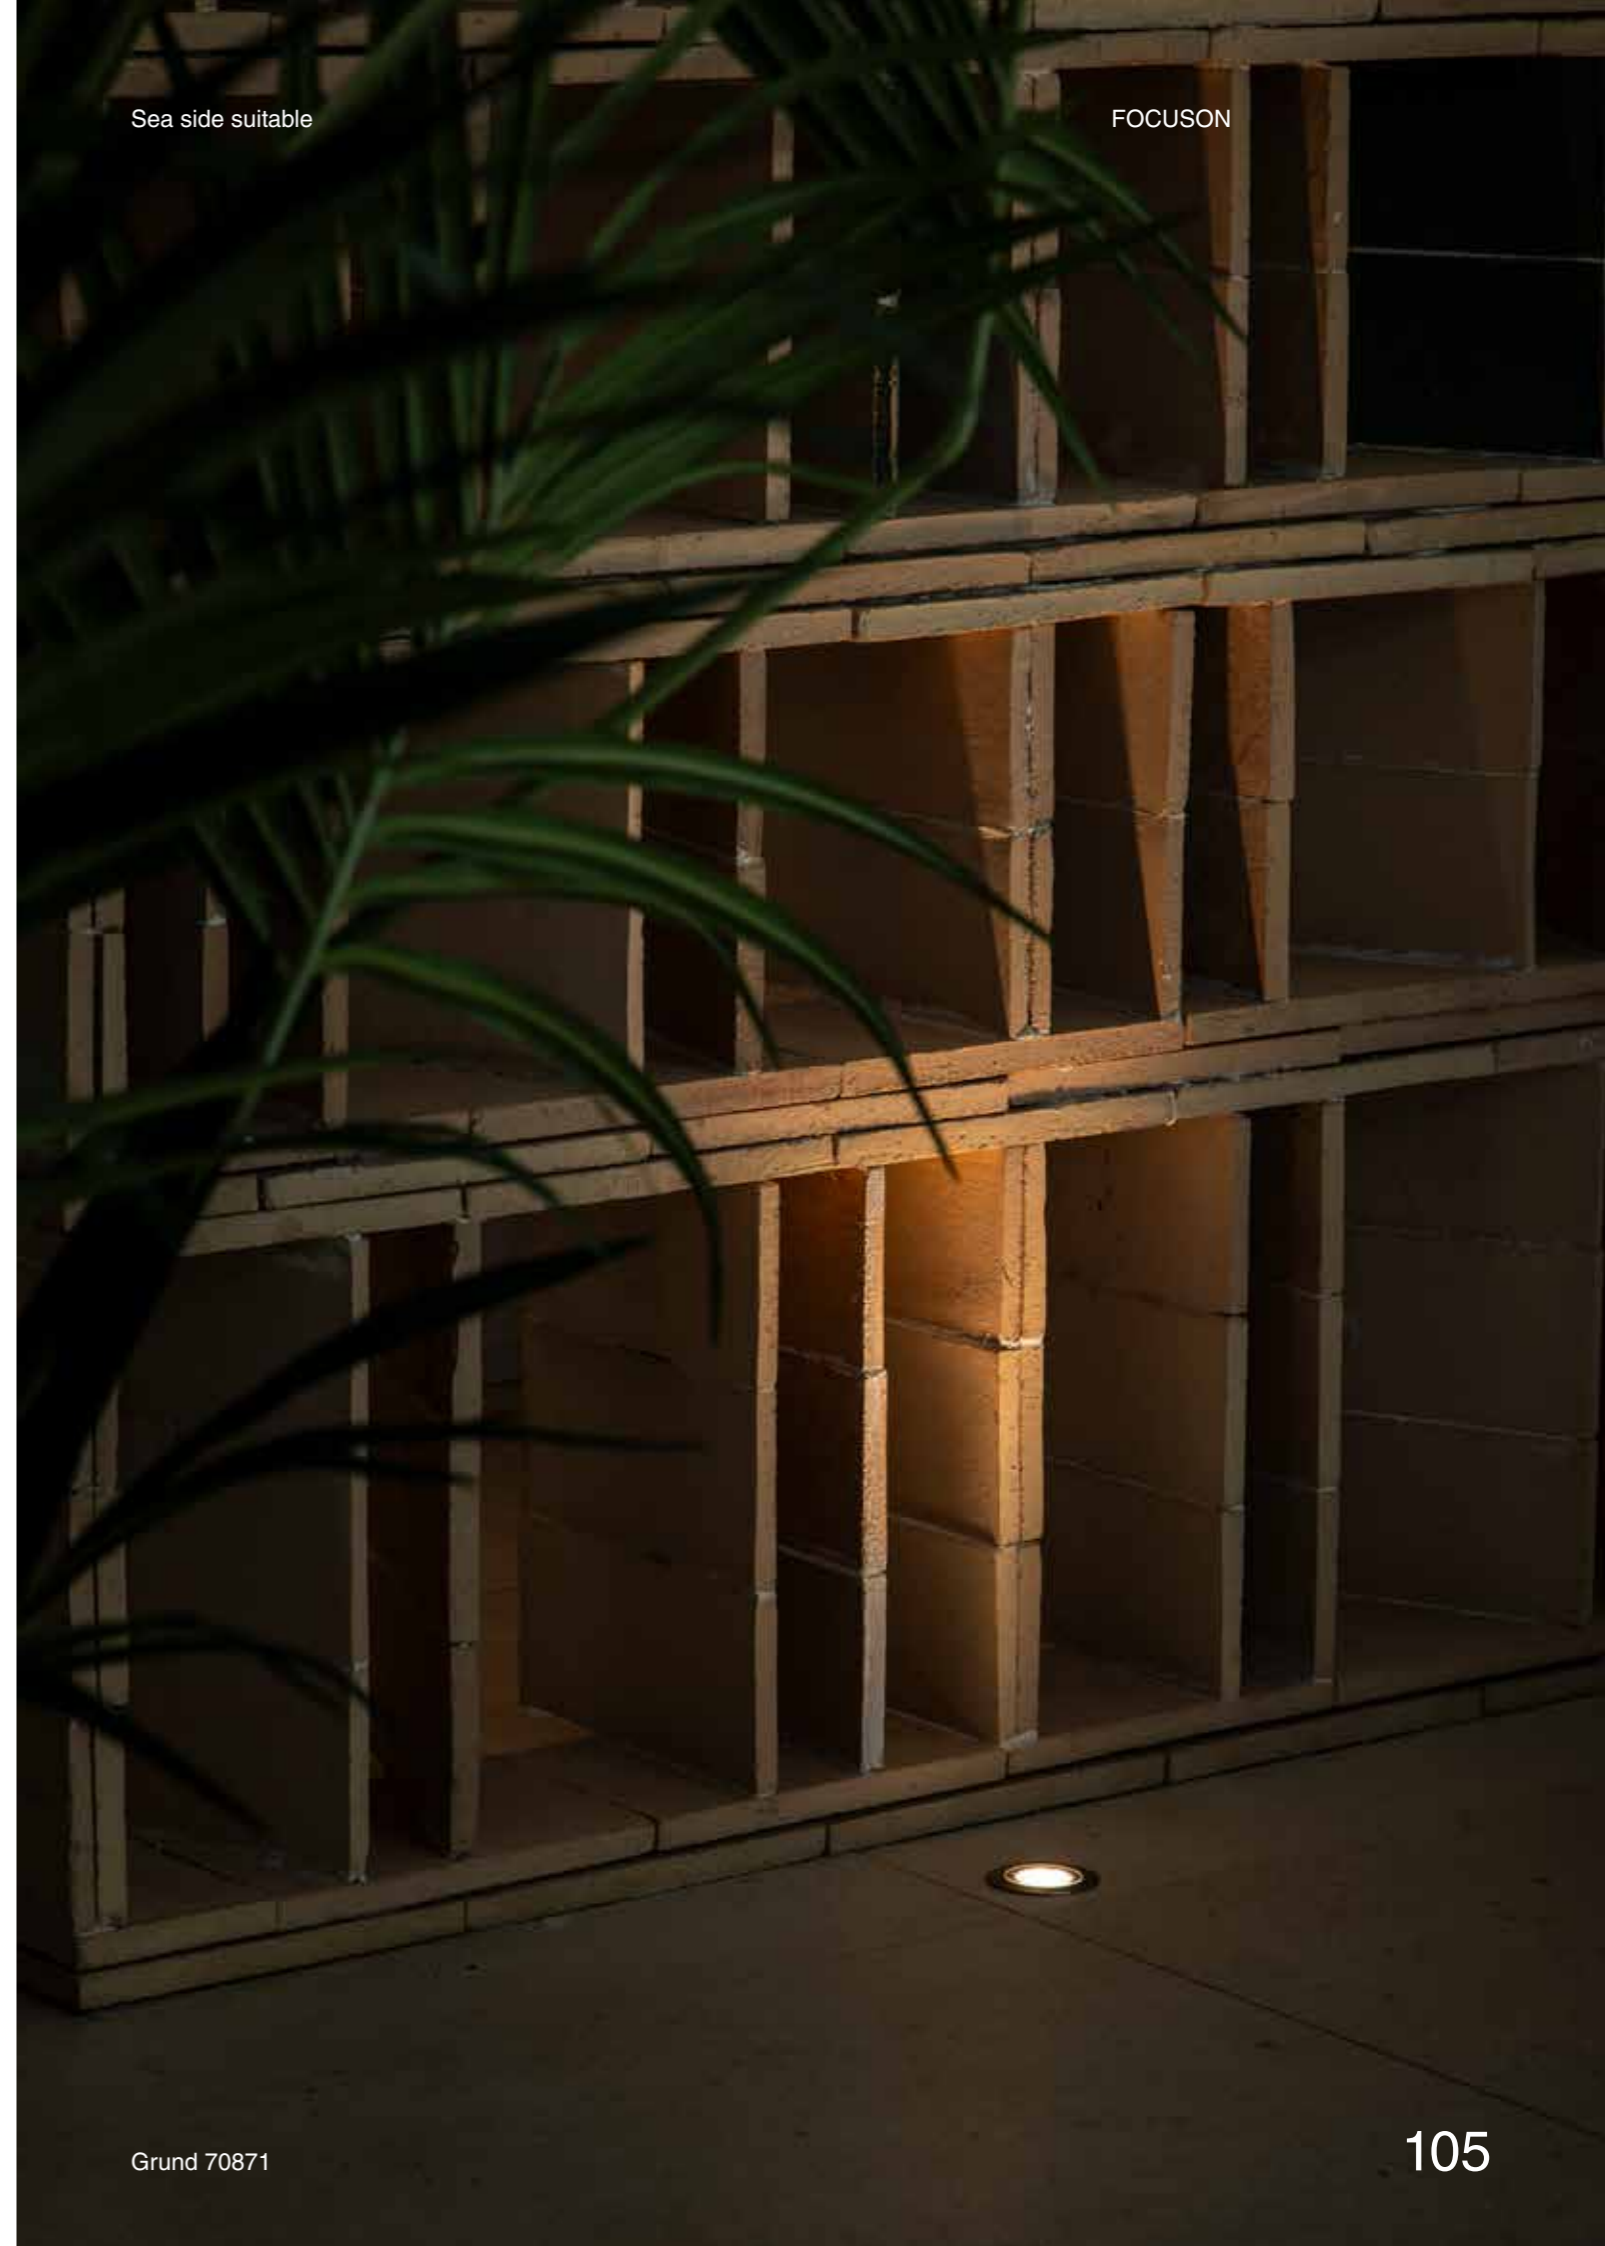

Kane 1

IP67 no incl. SEA SIDE SUITABLE
incl.


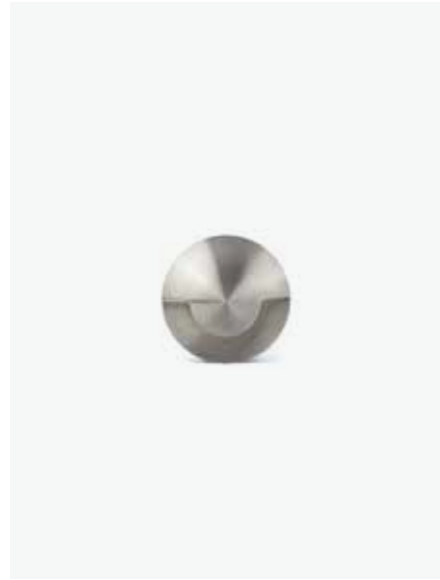


70660 ● Structure Satin Stainless
3000K ● Diffuser Opal
18,7lm

70660W ● Structure Satin Stainless
2700K ● Diffuser Transparent
18,7lm


Material	Structure Stainless Steel 316L
	Diffuser Glass
Power	3W
Light Source	COB LED
Class	III
CRI	>80
Voltage	24VDC
Beam angle	120°
Cut out	ø40mm
Resistance	1000Kg

*Drivers info pag. 478



Kane 2

IP67 no incl. SEA SIDE SUITABLE
incl.


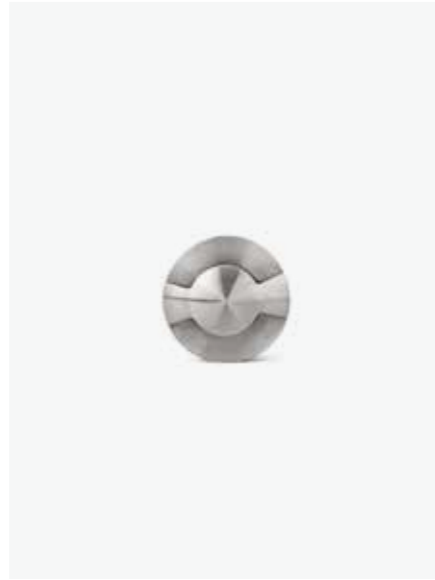


70661 ● Structure Satin Stainless
3000K ● Diffuser Opal
20,7lm

70661W ● Structure Satin Stainless
2700K ● Diffuser Transparent
20,7lm


Material	Structure Stainless Steel 316L
	Diffuser Glass
Power	3W
Light Source	COB LED
Class	III
CRI	>80
Voltage	24VDC
Beam angle	120°
Cut out	ø40mm
Resistance	1000Kg

*Drivers info pag. 478



Kane 3

IP67 no incl. SEA SIDE SUITABLE
incl.


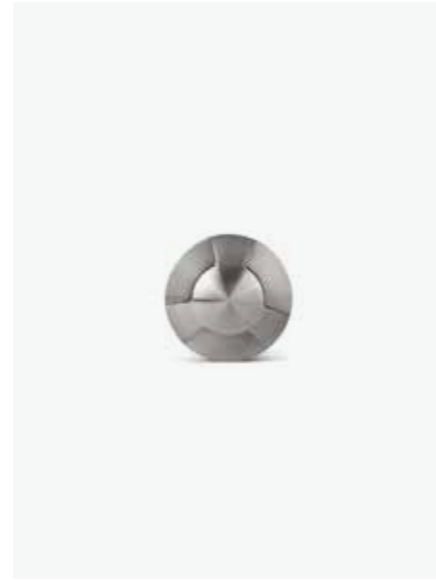


70662 ● Structure Satin Stainless
3000K ● Diffuser Opal
17,6lm

70662W ● Structure Satin Stainless
2700K ● Diffuser Transparent
17,6lm


Material	Structure Stainless Steel 316L
	Diffuser Glass
Power	3W
Light Source	COB LED
Class	III
CRI	>80
Voltage	24VDC
Beam angle	120°
Cut out	ø40mm
Resistance	1000Kg

*Drivers info pag. 478



Crosby 24V

IP67 no incl. SEA SIDE SUITABLE incl.

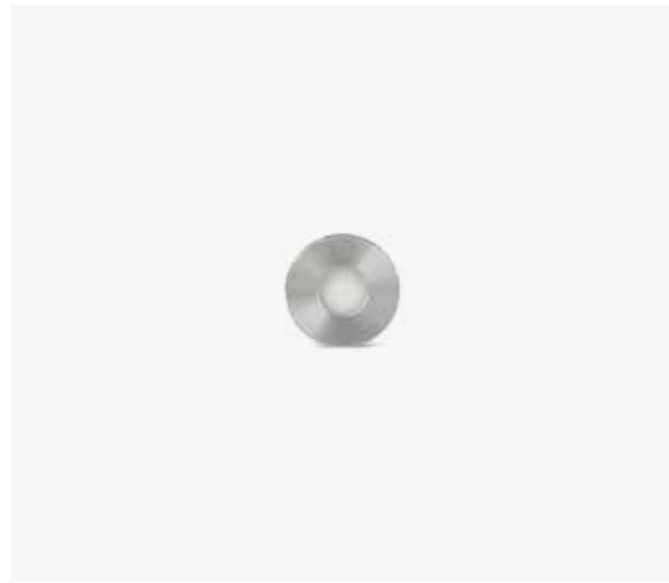

70453 ● Structure Satin Stainless + Matt Black
● Diffuser Opal

Material	Structure Stainless Steel 316L + Aluminium Diffuser Glass
Power	0,7W
Lumen Output	12lm
Light Source	SMD LED 3000K
Class	III
CRI	>80
Voltage	24VDC
Beam angle	120°
Cut out	ø90x156mm

Crosby





IP67 incl. SEA SIDE SUITABLE incl.



70459N ● Structure Satin Stainless + Matt Black
● Diffuser Opal

Material	Structure Stainless Steel 316L + Aluminium Diffuser Glass
Power	1W
Lumen Output	12lm
Light Source	SMD LED 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Beam angle	120°
Cut out	ø80x100mm

*Drivers info pag. 478




Led18 R

IP67 IK08 incl. SEA SIDE SUITABLE incl.




71498N ● Structure Satin Stainless
● Diffuser Opal

Material	Structure Stainless Steel 316L + Aluminium Diffuser Glass
Power	3W
Lumen Output	51lm
Light Source	SMD LED 3000K
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz
Cut out	ø90x65mm
Resistance	1000Kg




Led18 SQ

IP67 IK08 incl. SEA SIDE SUITABLE incl.

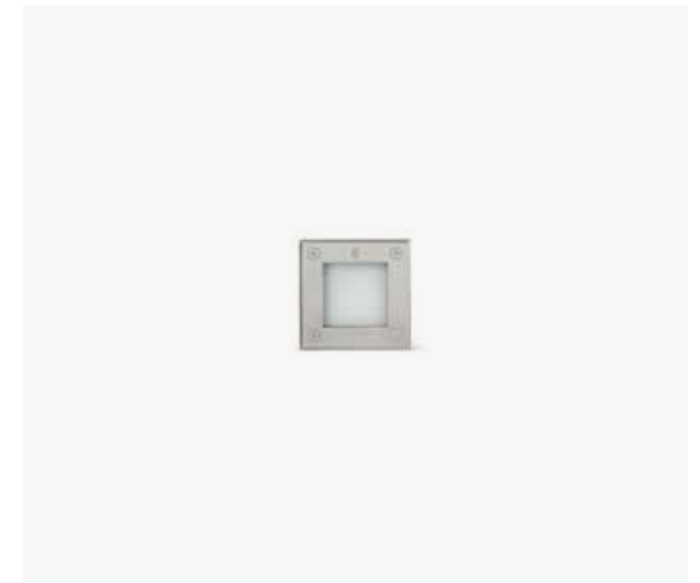

71499N ● Structure Satin Stainless
● Diffuser Opal

Material	Structure Stainless Steel 316L + Aluminium Diffuser Glass
Power	3W
Lumen Output	192lm
Light Source	SMD LED 3000K
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz
Cut out	80x70x80mm
Resistance	1000Kg






Taro

IP67 incl. SEA SIDE SUITABLE incl.



70449 ● Structure Satin Stainless
● Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium Diffuser Glass
Power	7W
Lumen Output	280lm
Light Source	COB LED 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Beam angle	30°
Cut out	ø90x135mm
Resistance	600Kg



Tecno

IP67 IK08 SEA SIDE SUITABLE incl.



71489N ● Structure Satin Stainless
● Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium Diffuser Glass
Power	8W
Light Source	GU10 LED
Class	I
Voltage	100V-240V/50/60Hz
Cut out	ø100x125mm
Resistance	2000Kg

Sea side suitable

FOCUSON



Tecno 71489N



Salt Asymm

IP67 IK08 incl. SEA SIDE SUITABLE incl.



70591 ●● Structure Satin Stainless + Matt Black
● Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	9W
Lumen Output	961lm
Light Source	COB LED 3000K
Class	I
CRI	≥80
Voltage	100V-240V/50/60Hz
Beam angle	45°
Cut out	ø180x122mm
Resistance	2000Kg



Curtis Asymm

IP67 incl. SEA SIDE SUITABLE incl.




70462N ●● Structure Satin Stainless + Matt Black
● Diffuser Transparent

Material	Structure Aluminium
	Diffuser Glass
Power	2W
Lumen Output	180lm
Light Source	COB LED 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Cut out	ø80x100mm

Sea side suitable

FOCUSON

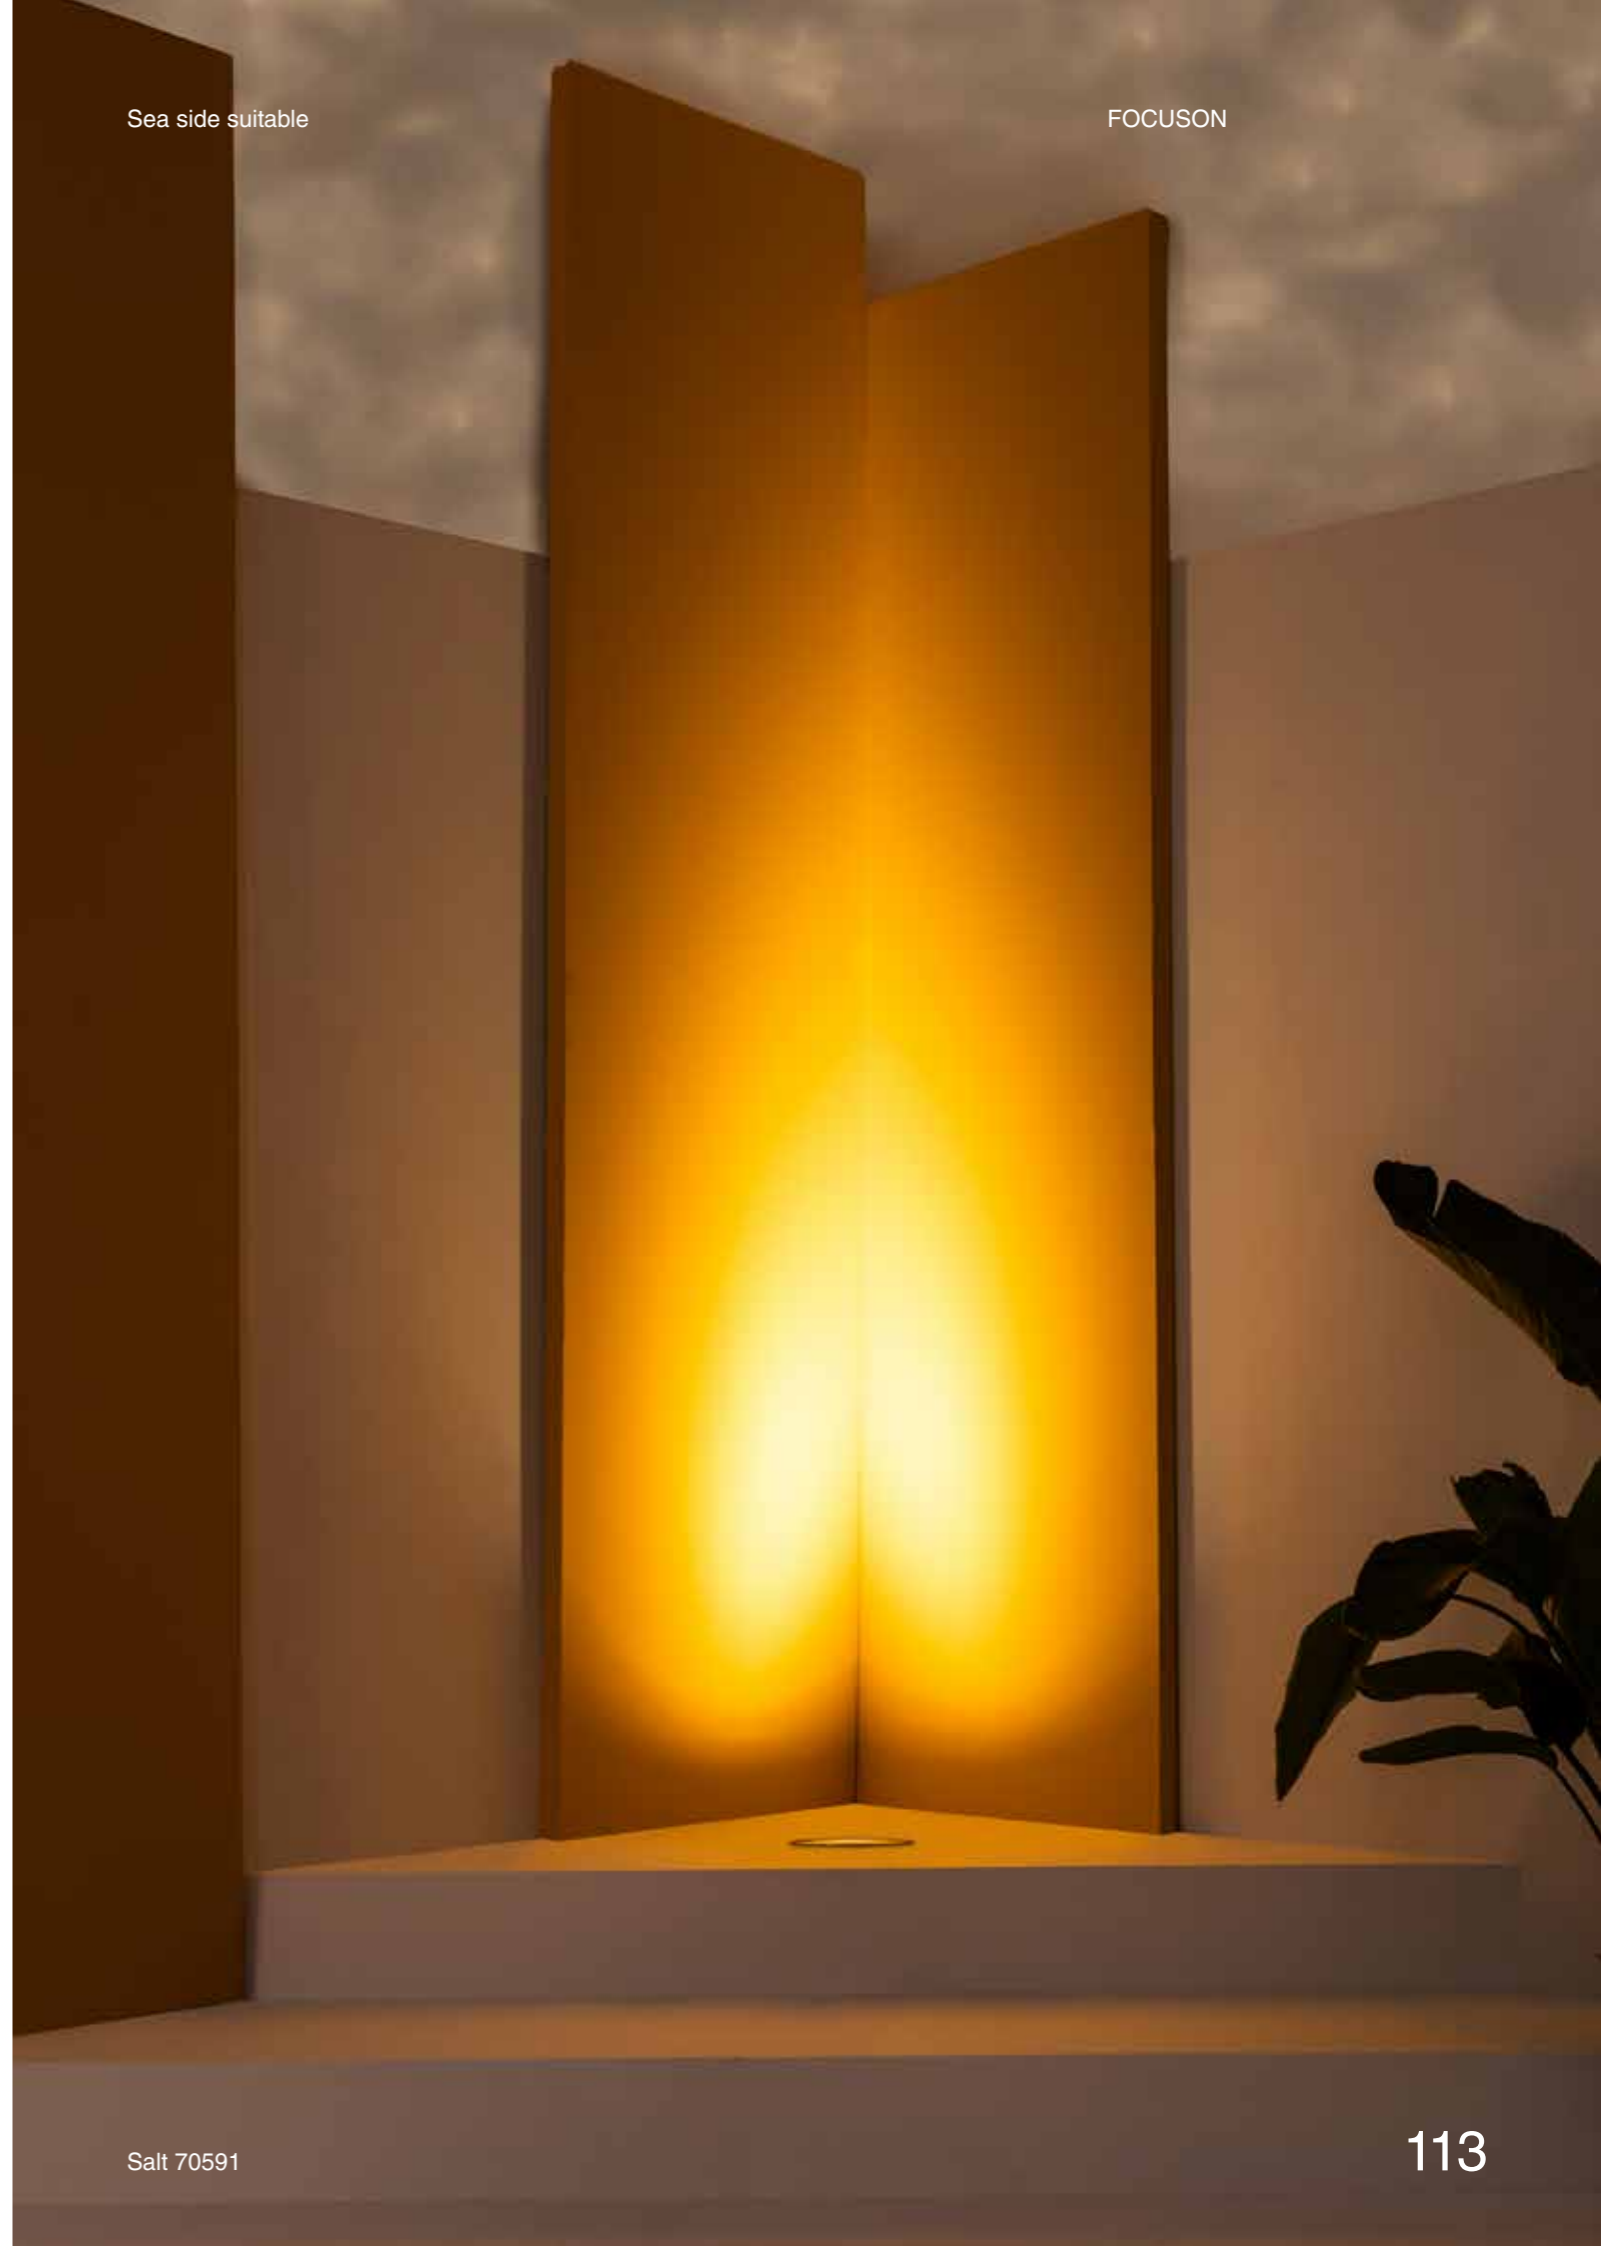

Poma

IP65

IK07

incl.

SEA SIDE
SUITABLE

DIM

incl.

NEW




71969

● Structure Dark Grey
● Diffuser Transparent

Material	Structure Aluminium Diffuser PC
Power	3W
Lumen Output	85/89/92/95lm
Light Source	SMD LED 2200/ 2700/ 3200/ 4000K
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz
Beam angle	120°
Cut out	114mm

ø114/4.48"



41/1.61"



114

Sea side suitable

FOCUSON



Poma 71969

115

Dang

IP67 no incl. SEA SIDE SUITABLE incl.



70446 ● Structure Satin Stainless
● Diffuser Transparent


Material	Structure Stainless Steel 316L + Glass Diffuser Glass
Power	3W
Lumen Output	48lm
Light Source	COB LED 3000K
Class	III
CRI	>80
Voltage	24VDC
Beam angle	40°
Cut out	ø63x115mm

*Drivers info pag. 478



Sea side suitable

FOCUSON

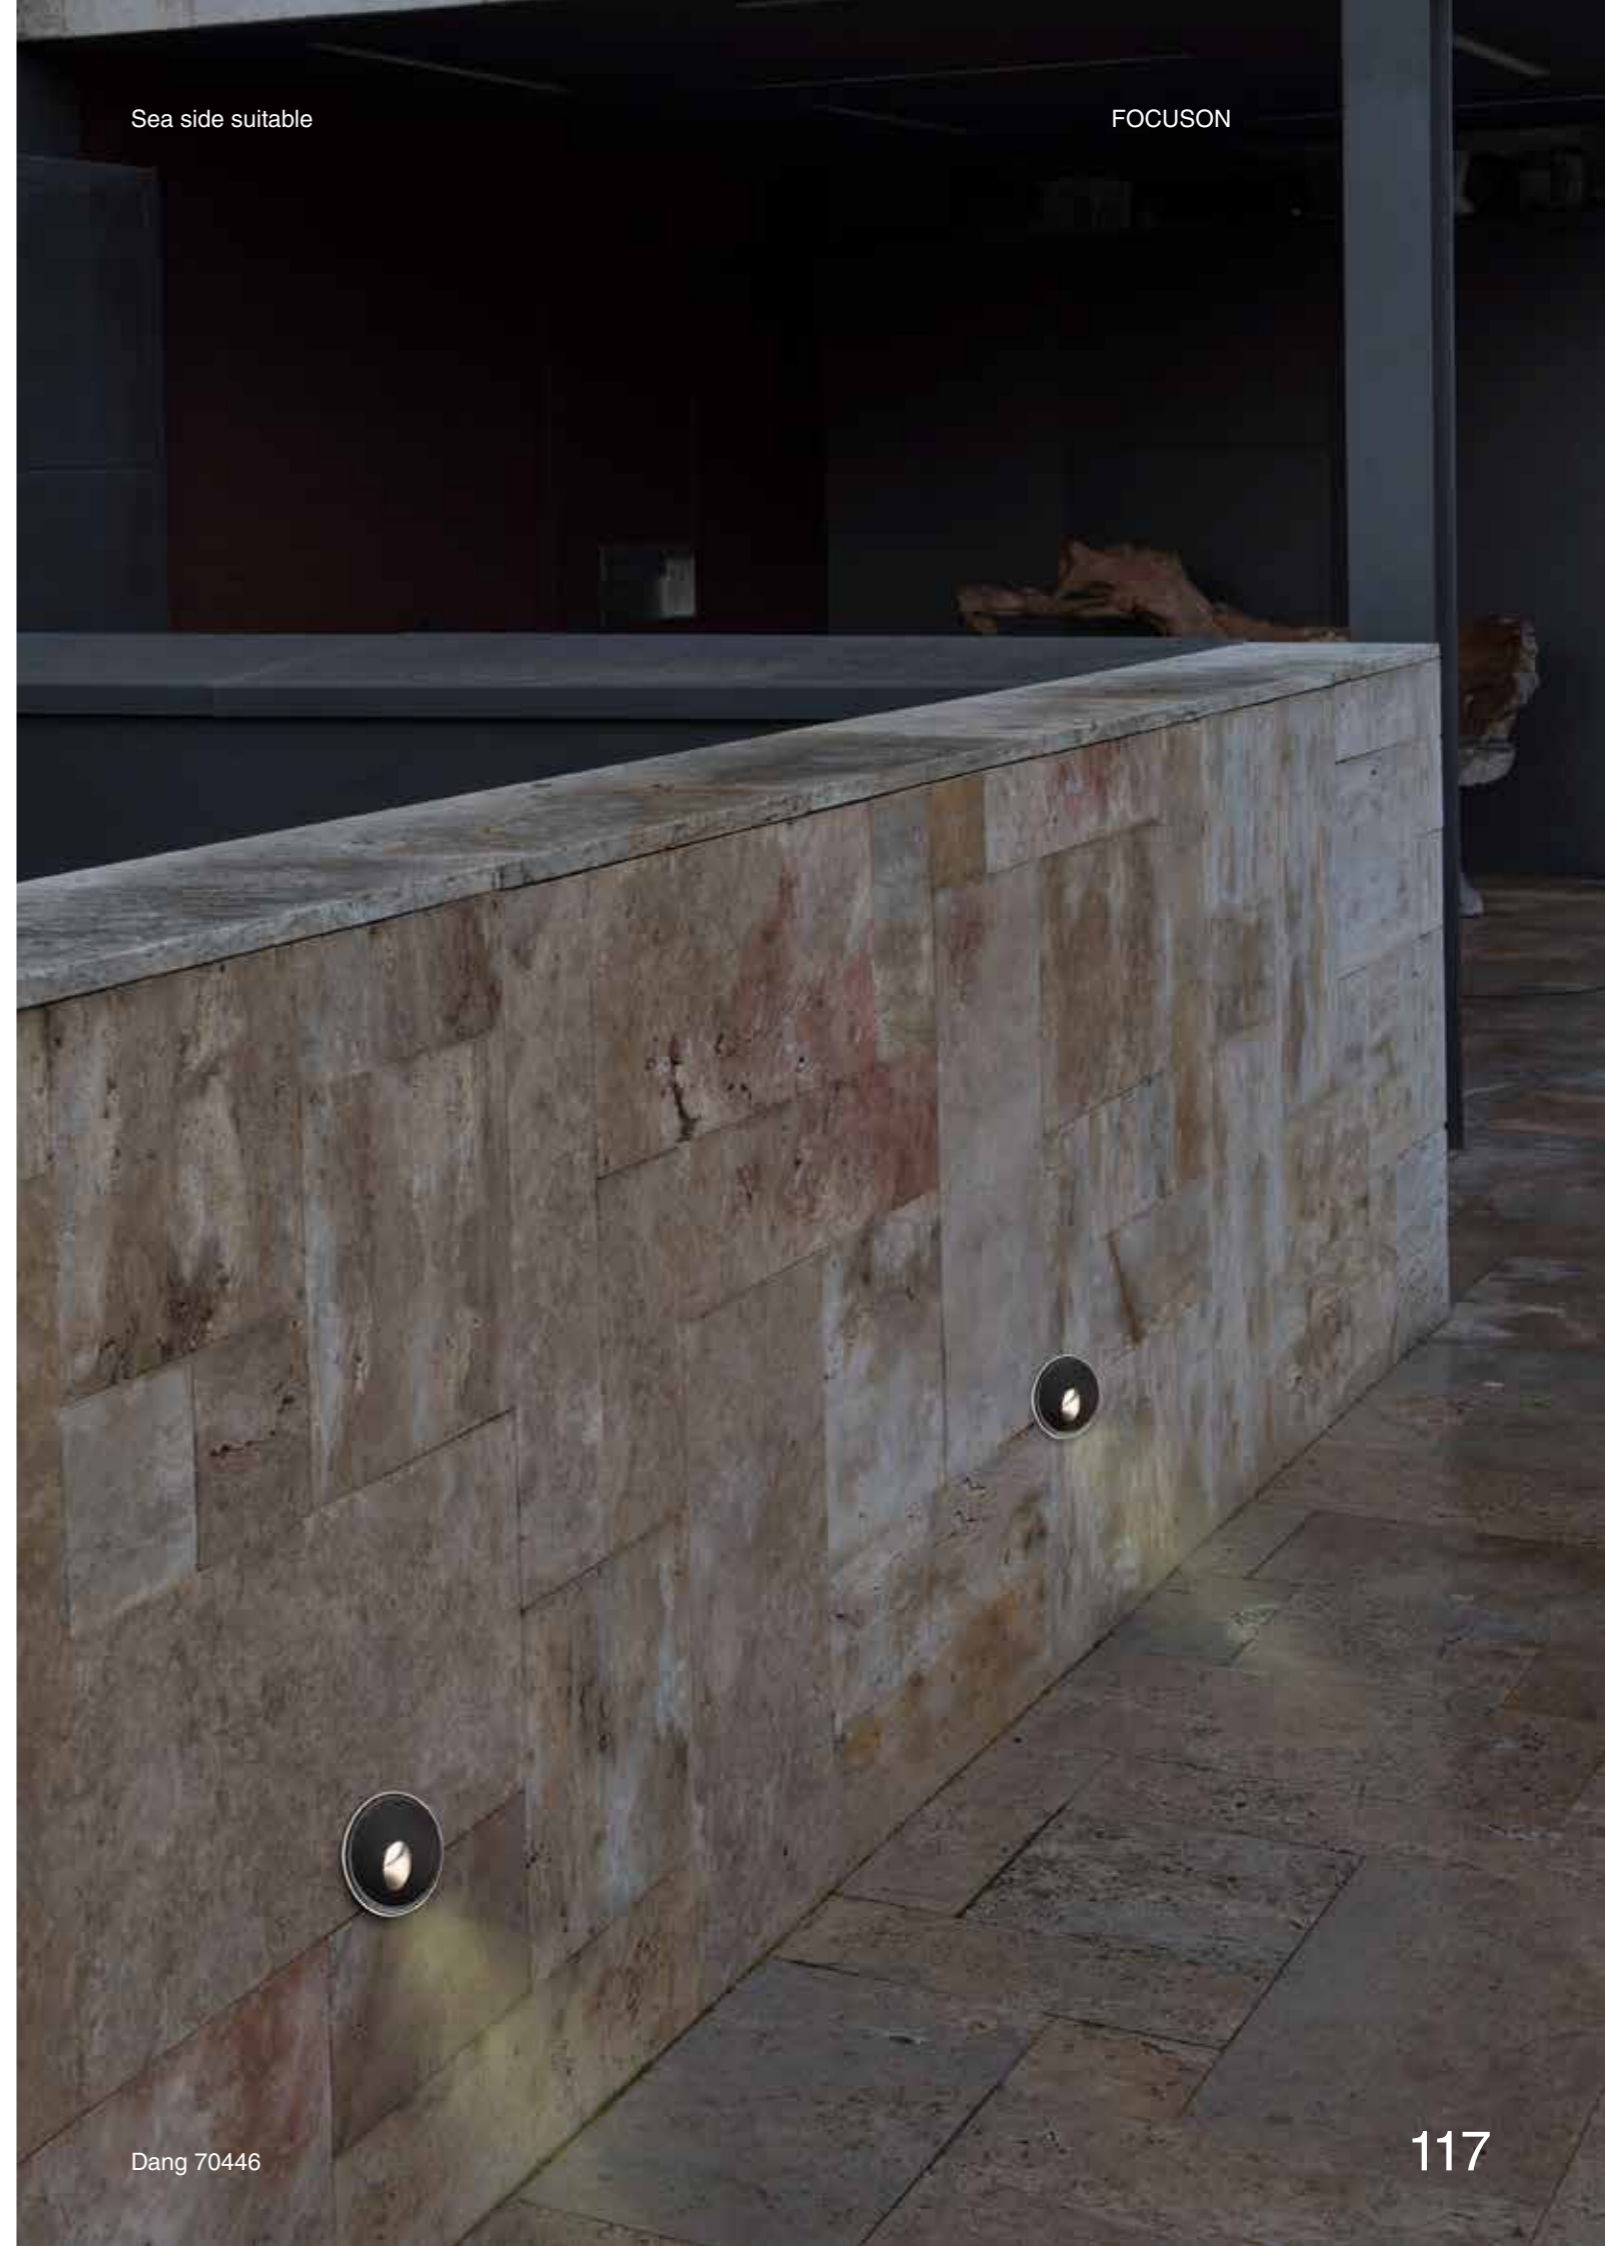

FOCUSON

Sea side suitable

Sea side suitable

FOCUSON



FAN

Outwood

Faro Lab



Outwood 34360

Size Tamaño



L
ø1500/59.1"

Finish Acabado



Dark Brown
Oak



Matt White
Oak



Dark Brown
Dark Walnut



Matt White
Matt White

Light Kit Kit de luz



Standard
E27 BULB

Mounting Montaje




Surface

Control system Sistema de control



Smart Wi-Fi



Wired wall controller



Remote control



0-10V/1-10V



Fan features

Material	Structure Steel
	Blades ABS
	Diffuser Glass



Light Kit




Realistic wood-finish
ABS blades



Glass diffuser



IP44

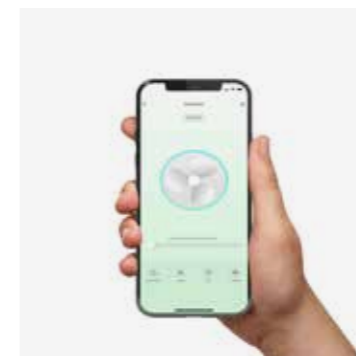

Smart option



RF Model
Memory function page 27



Model	Size	Structure	Blades	Mounting	Control type
34360	L	Dark Brown	Oak	Surface	Remote Control RF
34361	L	Matt White	Oak	Surface	Remote + Smart Wi-Fi
34362	L	Dark Brown	Dark Walnut	Surface	0-10V/1-10V Active/Passive
34363	L	Matt White	Matt White	Surface	White Wired Wall Controller
					Black Wired Wall Controller


Example 34361VC — OUTWOOD L Ø1500 White/oak ceiling fan 0-10V

Air performance

Size	Airflow (m3 min)	RPM	Power (W)
L ø1500/59.1"	101-120-138-154-170-187	73-92-108-127-141-152	5-8-12-18-25-35

Measurements

Surface
L
A: 265/10.43" A1: 220/8.66" F: ø1500/59.1"



Tunable white

Model	Size	Structure	Blades	Mounting	Control type	Light Model
34360	L	Dark Brown	Oak	Surface	Remote Control RF	1B Standard
34361	L	Matt White	Oak	Surface	Remote + Smart Wi-Fi	
34362	L	Dark Brown	Dark Walnut	Surface	0-10V/1-10V Active/Passive	
34363	L	Matt White	Matt White	Surface	White Wired Wall Controller	
					Black Wired Wall Controller	

Example 34360RW1B — OUTWOOD L Ø1500 Brown/oak ceiling fan 1xE27 White Wall Control

Air performance


Size	Airflow (m3 min)	RPM	Power (W)
L ø1500/59.1"	101-120-138-154-170-187	73-92-108-127-141-152	5-8-12-18-25-35

Lighting features

Light Source	1 E27 LED max. 15W
Recom. Bulb	17463

Measurements

Surface
L
A: 430/16.93" A1: 220/8.66" F: ø1500/59.1"



Typhoon

Jordi Busquets



Size
Tamaño



M
ø1270/50"

Finish
Acabado



Matt White
Matt White



Dark Brown
Brown



Matt White
Maple



Brown
Maple

Light Kit
Kit de luz



Standard

3000K CRI >80

Mounting
Montaje



Surface

Control system
Sistema de control



Remote control



Typhoon 34105-130

Fan features

Material	Structure Steel
	Blades ABS
	Diffuser ABS




Light Kit



Sloped Ceiling



IP44

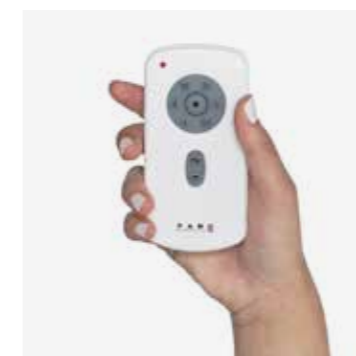

RF Model



Model	Size	Structure	Blades	Mounting	Control type
33480	M	<input type="radio"/> Matt White	<input type="radio"/> Matt White	<input type="checkbox"/> Surface	<input type="checkbox"/> Remote Control RF
33490	M	<input type="radio"/> Dark Brown	<input type="radio"/> Brown		
34105	M	<input type="radio"/> Matt White	<input type="radio"/> Maple		
34106	M	<input type="radio"/> Brown	<input type="radio"/> Maple		


Example 33480 — TYPHOON M Ø1300 White fan IP44

Air performance

Size	Airflow (m3 min)	RPM	Power (W)	
M	ø1270/50"	183	50-71-93-115-138-162	3-5-8-12-21-31

Measurements

Surface
M
A: 390/15.35" A1: 370/14.57" F: ø1270/50"



Model	Size	Structure	Blades	Mounting	Control type	Light Model	Color T	Dimm
33480-14	M	<input type="radio"/> Matt White	<input type="radio"/> Matt White	<input type="checkbox"/> Surface	<input type="checkbox"/> Remote Control RF	<input type="checkbox"/> Standard	3000K	Yes
33490-16	M	<input type="radio"/> Dark Brown	<input type="radio"/> Brown					
34105-130	M	<input type="radio"/> Matt White	<input type="radio"/> Maple					
34106-130	M	<input type="radio"/> Brown	<input type="radio"/> Maple					

Example 33480-14 — TYPHOON M LED White fan IP44

Air performance


Size	Airflow (m3 min)	RPM	Power (W)	
M	ø1270/50"	183	50-71-93-115-138-162	3-5-8-12-21-31

Lighting features

Power	19W
Lumen Output	900lm
Light Source	SMD LED
Dimmable K	3000K
CRI	>80

Measurements

Surface
M
A: 390/15.35" A1: 355/13.98" F: ø1270/50"



Palma
Faro Lab



Palma 34301

Size
Tamaño




Finish
Acabado



Dark Brown
Dark Brown

Light Kit
Kit de luz



Standard

1 E27 LED max. 15W

Mounting
Montaje




Surface

Control system
Sistema de control



Smart Wi-Fi



Wired wall controller



Remote control



0-10V/1-10V



Palma 343011B

Fan features


Material	Structure Steel
	Blades ABS
	Diffuser Glass





Textured blade




Glass diffuser

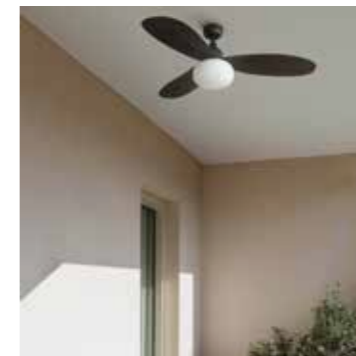

IP44

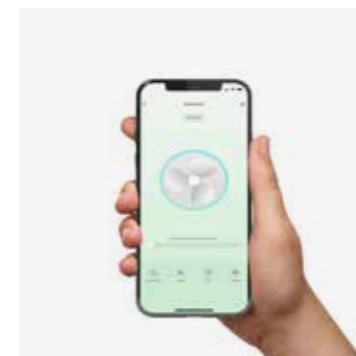


Smart option

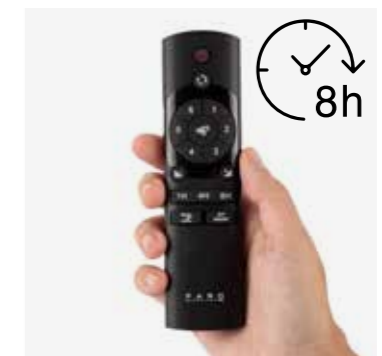

RF Model
Memory function page 27



IP44 220-240V 50 / 60Hz

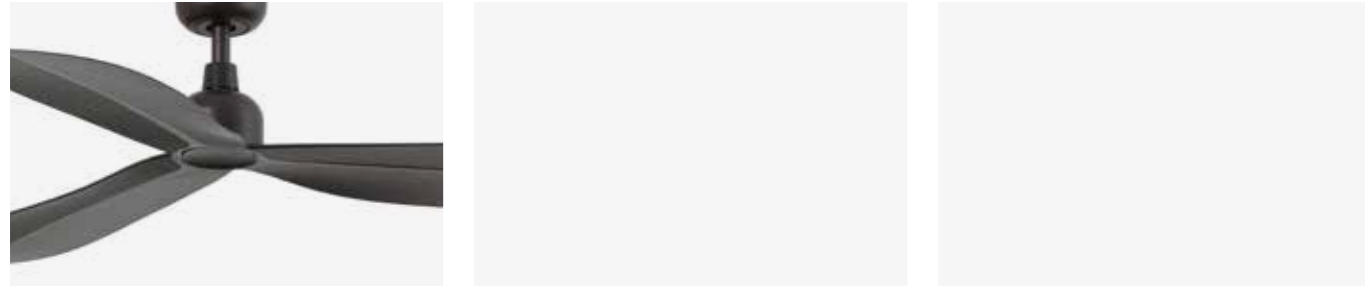

Model	Size	Structure	Blades	Mounting	Control type
34301	M	Dark Brown	Dark Brown	Surface	<input type="checkbox"/> Remote Control RF <input type="checkbox"/> WT Remote + Smart Wi-Fi <input type="checkbox"/> VC 0-10V/1-10V Active/Passive <input type="checkbox"/> RW White Wired Wall Controller <input type="checkbox"/> RB Black Wired Wall Controller


Example 34301WT — PALMA M Ø1290 Brown fan IP44 TUYA

Air performance


Size	Airflow (m3 min)	RPM	Power (W)	
M	ø1290/50.8"	52-73-98-131-152-179	69-100-136-170-200-230	4-5-9-15-24-35

Measurements

Surface	Recessed
M	
A: 280/11.02" A1: 173/6.81" F: ø1290/50.8"	



IP44 DIM IP44 220-240V 50 / 60Hz

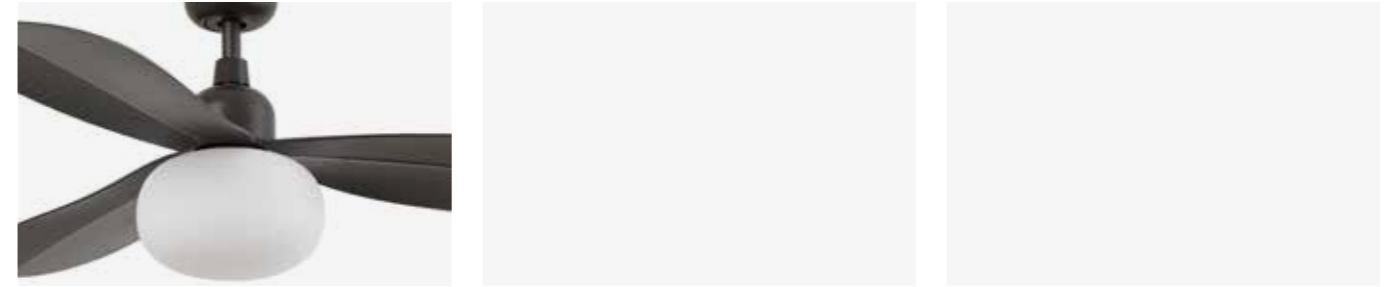

Model	Size	Structure	Blades	Mounting	Control type	Light Model
34301	M	Dark Brown	Dark Brown	Surface	<input type="checkbox"/> Remote Control RF <input type="checkbox"/> WT Remote + Smart Wi-Fi <input type="checkbox"/> VC 0-10V/1-10V Active/Passive <input type="checkbox"/> RW White Wired Wall Controller <input type="checkbox"/> RB Black Wired Wall Controller	<input type="checkbox"/> 1B Standard

Example 34301VC1B — PALMA M Ø1290 Brown ceiling fan 1xE27 0-10V

Air performance


Size	Airflow (m3 min)	RPM	Power (W)	
M	ø1290/50.8"	52-73-98-131-152-179	69-100-136-170-200-230	4-5-9-15-24-35

Lighting features

Light Source	1 E27 LED max. 15W
Recom. Bulb	17463

Measurements

Surface	Recessed
M	
A: 412/16.22" A1: 173/6.81" F: ø1290/50.8"	




Marine

Faro Lab



Marine 34372

Size Tamaño



M
ø1250/49.2"

Finish Acabado



Matt White
Oak



Dark Brown
Oak



Dark Brown
Dark Walnut



Matt White
Matt White



Dark Brown
Dark Brown

Mounting Montaje




Surface

Control system Sistema de control



Smart Wi-Fi



Wired wall controller



Remote control



0-10V/1-10V



Marine 34370



Material	Structure Steel
	Blades ABS




Realistic wood-finish
ABS blades




Sloped Ceiling



IP44

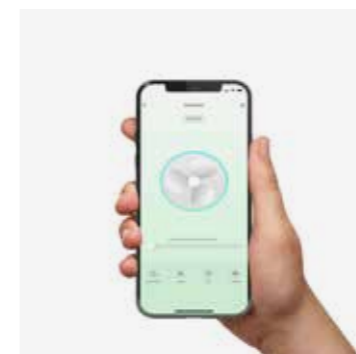



Smart option

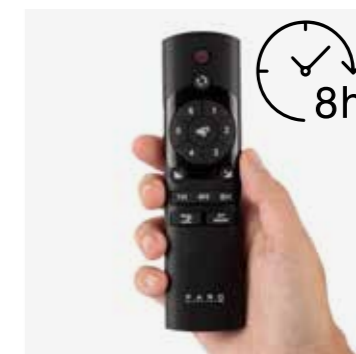

RF Model
Memory function page 27



IP44 220-240V 50 / 60Hz



Model	Size	Structure	Blades	Mounting	Control type
34274	M	Matt White	Matt White	Surface	Remote Control RF
34275	M	Dark Brown	Dark Brown		WT Remote + Smart Wi-Fi
34370	M	Matt White	Oak		VC 0-10V/1-10V Active/Passive
34371	M	Dark Brown	Oak		RW White Wired Wall Controller
34372	M	Dark Brown	Dark Walnut		RB Black Wired Wall Controller

Example 34274WT — MARINE M Ø1250 White ceiling fan IP44 TUYA

M	ø1250/49.2"	67-83-108-121-150-174	86-121-146-175-198-222	4-6-9-14-20-27
---	-------------	-----------------------	------------------------	----------------

Measurements

Surface		
M	A: 245/9.65"	A1: 221/8.7"
	F: ø1250/49.2"	

