

FOCUS ON

Sea Side Suitable



La proximité de la mer présente des conditions environnementales très particulières. L'humidité constante, l'air salin, le vent, le sable et le rayonnement solaire intense créent un environnement particulièrement agressif pour les objets exposés à l'extérieur.



Dans les zones côtières, il ne suffit pas qu'un luminaire soit esthétique ou fonctionnel. Il est fondamental que ses matériaux, finitions et mécanismes internes soient préparés à affronter l'usure accélérée provoquée par la corrosion, l'oxydation et les variations brusques de température.

FOCUSON

Sea side suitable



Sea side suitable

Cette édition spéciale de Faro Barcelona réunit une sélection de luminaires et de ventilateurs soigneusement conçus pour offrir une performance durable dans des environnements à forte exigence climatique. Tous les modèles inclus ont été testés selon des critères qui respectent ou dépassent les exigences des normes européennes telles que la norme EN 60598 (appareils d'éclairage) ou les indices de protection comme l'IP (contre la poussière et l'eau), ainsi que la résistance au brouillard salin selon l'ISO 9227. Une proposition qui répond non seulement à des exigences techniques mais aussi à une manière d'habiter et de respecter ces paysages.

FOCUSON





Les produits de cette collection ont été fabriqués avec des matériaux et finitions spécifiquement pensés pour résister à une exposition prolongée à un environnement marin.

Dans de nombreux cas, des résines techniques, plastiques d'ingénierie et métaux traités avec des revêtements spéciaux anti-corrosion sont utilisés.

Les surfaces sont conçues pour résister aux UV sans se décolorer, et les structures internes disposent de protections mécaniques contre les chocs et l'humidité.

Nombre de ces modèles dépassent les tests de brouillard salin (salt spray test) avec des résultats équivalents à plus de 1 000 heures d'exposition sans détérioration significative.

Ils possèdent également des indices de protection IP élevés (IP44, IP65 ou plus), garantissant leur étanchéité à l'eau et aux particules solides.

Dans ce contexte, le design est une forme d'adaptation à l'environnement. Il ne s'agit pas seulement d'un choix formel, mais d'une réponse fonctionnelle face à des conditions pouvant compromettre l'usage et l'intégrité de l'objet avec le temps.


La durabilité devient ainsi un critère essentiel. Un luminaire résistant prolonge non seulement sa durée de vie, mais réduit aussi l'impact environnemental et les besoins d'entretien.

FLOOR



75564	● Structure Beige
75563	● Structure Grey

Material	Structure Concrete
Power	6W
Lumen Output	214lm
Light Source	SMD LED 2700K
Class	II
CRI	>80
Voltage	220V-240V/50/60Hz



Sea side suitable

FOCUSON



Gaia 75564

Grot 400

Faro Lab

IP55

IK06

incl.



SEA SIDE
SUITABLE

IP68
CONNECTOR



75631	● Structure Grey
2700K 77lm	
75634	● Structure Grey
3000K 110lm	

Material	Structure Concrete
	Diffuser Glass
Power	6,5W
Light Source	SMD LED
Class	II
CRI	≥80
Voltage	100V-277V/50/60Hz



Grot 700

Faro Lab

IP55

IK06

incl.


SEA SIDE
SUITABLE

IP68
CONNECTOR



75632	● Structure Grey
2700K 77lm	
75635	● Structure Grey
3000K 110lm	

Material	Structure Concrete
	Diffuser Glass
Power	6,5W
Light Source	SMD LED
Class	II
CRI	≥80
Voltage	100V-277V/50/60Hz



Sea side suitable


FOCUSON



Grot 75632

Hybrid energy for maximum efficiency

Luma features a hybrid system that seamlessly integrates solar energy with mains electricity. During the day, it recharges via its solar panel; when the battery runs low, the electrical grid takes over—without any interruption. It can also be configured to operate in solar-only mode, completely cable-free, making it ideal for reducing energy consumption and simplifying installation.

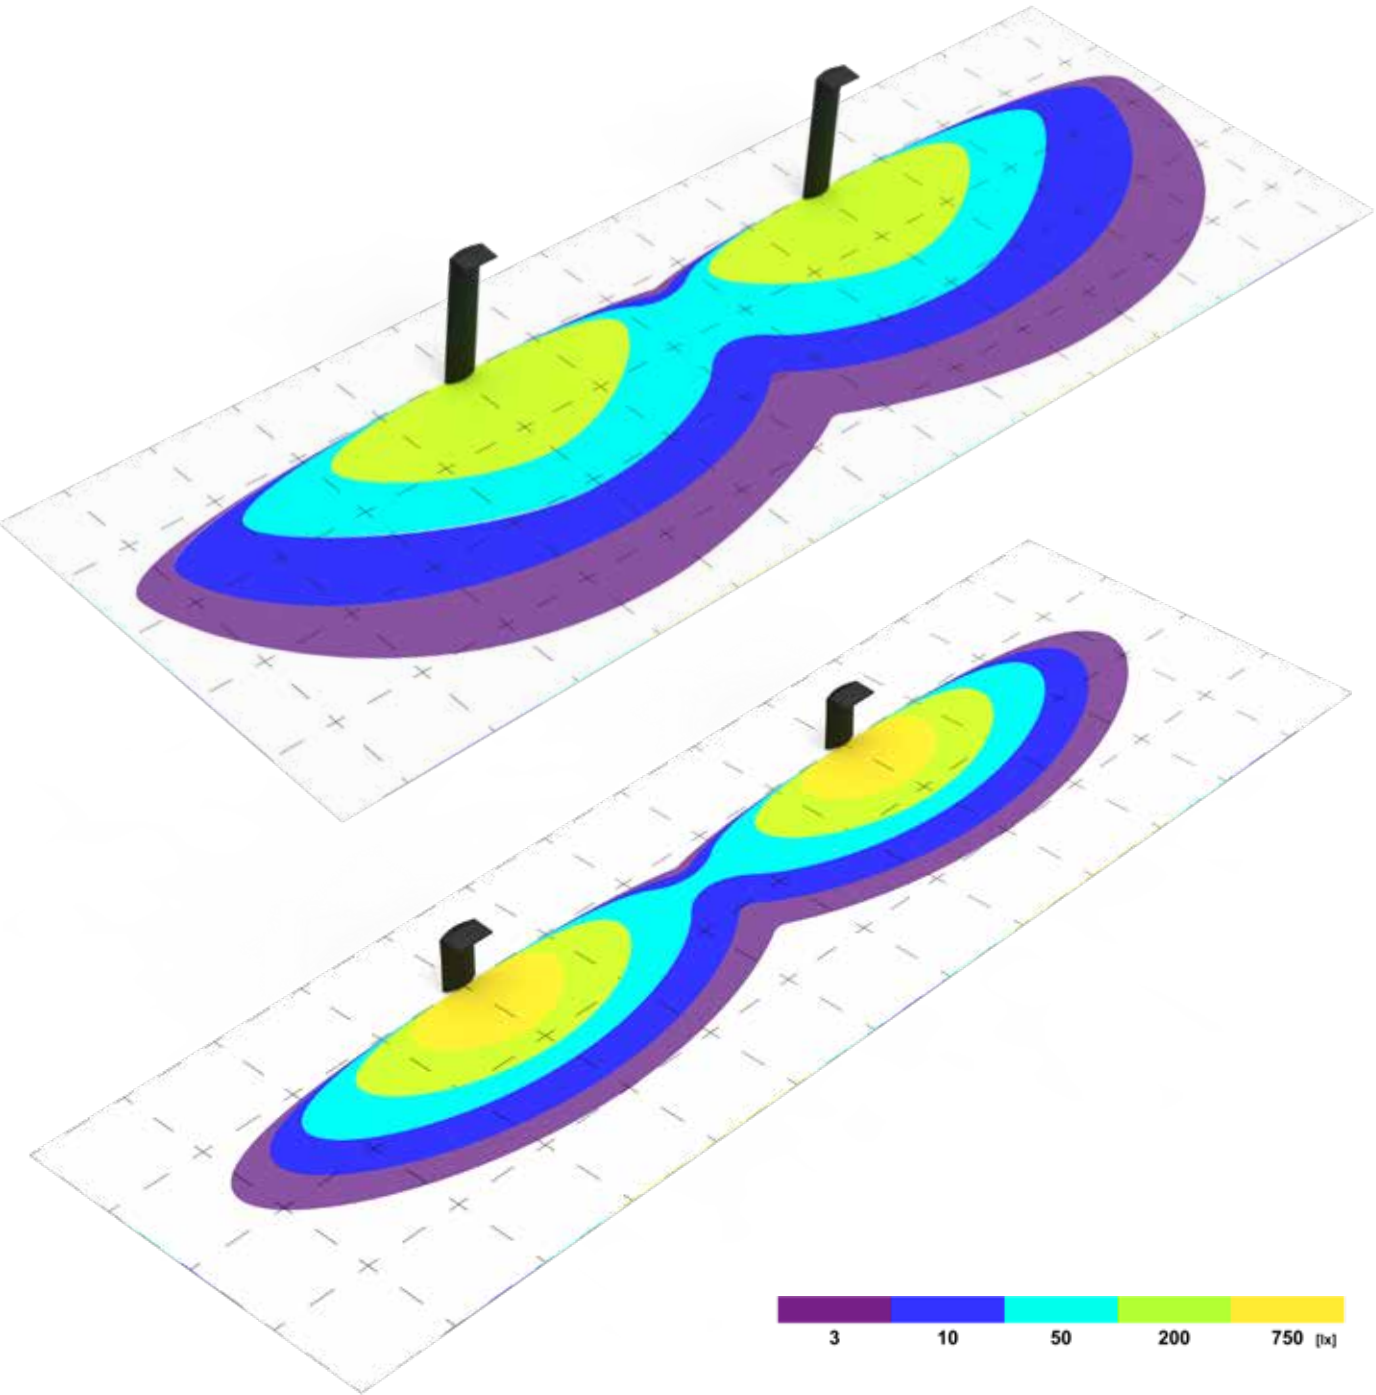

HYBRID
SOLAR+CABLE

Sea side suitable

FOCUSON



LUMA Faro Lab



Smart motion sensor

Luma's motion sensor offers three modes: permanent on, total off, or 20% light that ramps up to 100% when motion is detected. An intelligent system that enhances comfort, reduces consumption, and extends battery life.



A sustainable savings option

Luma optimizes every resource: solar energy to reduce consumption, advanced optics to maximize performance, and a wireless operation that simplifies installation. Technology, design, and sustainability—all in service of efficiency.

SOLAR



Every detail matters

The top features a subtle tilt that prevents water from pooling on the solar panel, ensuring better performance and a longer lifespan. This thoughtful detail also optimizes the solar capture angle, boosting charging efficiency and supporting more sustainable operation.

Luma 300
Faro Lab

IP65

IK06

SEA SIDE
SUITABLE




NEW



74457

● **Structure** Dark Grey
● **Diffuser** Transparent

Material	Structure Aluminium
	Diffuser PC
Power	5W
Lumen Output	525,5lm
Light Source	LED MODULE 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Beam angle	120°
Battery	4/6 Charge



Luma 600
Faro Lab

IP65

IK06

SEA SIDE
SUITABLE




NEW



74458

● **Structure** Dark Grey
● **Diffuser** Transparent

Material	Structure Aluminium
	Diffuser PC
Power	5W
Lumen Output	525,5lm
Light Source	LED MODULE 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Beam angle	120°
Battery	4/6 Charge



Sea side suitable

FOCUSON

Luma 74458

Glint 157
Faro Lab

IP55

IK06

incl.

SEA SIDE
SUITABLE

IP68
CONNECTOR




75636
2700K
68lm

75639
3000K
97lm

● **Structure** Grey

Material	Structure Concrete
	Diffuser Glass
Power	6,5W
Light Source	SMD LED
Class	II
CRI	≥80
Voltage	100V-277V/50/60Hz



Glint 400
Faro Lab

IP55

IK06

incl.

SEA SIDE
SUITABLE

IP68
CONNECTOR




75637
2700K
68lm

75640
3000K
97lm

● **Structure** Grey

Material	Structure Concrete
	Diffuser Glass
Power	6,5W
Light Source	SMD LED
Class	II
CRI	≥80
Voltage	100V-277V/50/60Hz



Glint 700
Faro Lab

IP55

IK06

incl.

SEA SIDE
SUITABLE

IP68
CONNECTOR




75638
2700K
68lm

75641
3000K
97lm

● **Structure** Grey

Material	Structure Concrete
	Diffuser Glass
Power	6,5W
Light Source	SMD LED
Class	II
CRI	≥80
Voltage	100V-277V/50/60Hz



Sea side suitable

FOCUSON



Glint 75640


Totem 285
Roger Vancells

IP55 IK06 incl. SEA SIDE SUITABLE IP68 CONNECTOR



75550
2700K 254lm
75551
3000K 370lm

Material	Structure Concrete
Power	6,5W
Light Source	SMD LED
Class	II
CRI	≥80
Voltage	220V-240V/50/60Hz




Totem 611
Roger Vancells

IP55 IK06 incl. SEA SIDE SUITABLE IP68 CONNECTOR



75552
2700K 307lm
75553
3000K 370lm

Material	Structure Concrete
Power	6,5W
Light Source	SMD LED
Class	II
CRI	≥80
Voltage	220V-240V/50/60Hz



Sea side suitable

FOCUSON



Totem 75551

IP65

IK06



SEA SIDE
SUITABLE




75595
2700K 242lm
75596
3000K 370lm

● Structure Grey

● Structure Grey

Material	Structure Concrete
Power	6W
Light Source	SMD LED
Class	II
CRI	≥80
Voltage	220V-240V/50/60Hz



Sea side suitable

FOCUSON



Pilo 75595


Block 350
Àlex & Manel Llusçà

IP65 IK06 SEA SIDE SUITABLE



- 74141 Structure Grey Diffuser Opal
- 74144 NEW Structure Sand Diffuser Opal

Material	Structure Concrete
	Diffuser Glass
Light Source	1 E27 LED G45 max. 15W
Bulb incl.	No
Recom. Bulb	17463
Class	I




Block 700
Àlex & Manel Llusçà

IP65 IK06 SEA SIDE SUITABLE



- 74142 Structure Grey Diffuser Opal
- 74146 NEW Structure Sand Diffuser Opal

Material	Structure Concrete
	Diffuser Glass
Light Source	1 E27 LED G45 max. 15W
Bulb incl.	No
Recom. Bulb	17463
Class	I



Sea side suitable

FOCUSON



Block 74141


Keenan 1

IP67 IK08 no incl. SEA SIDE SUITABLE



- 70546 Structure Matt Nickel Diffuser Transparent
- 70564 Structure Matt Nickel Diffuser Transparent

Material	Structure Aluminium
	Diffuser PC
Power	0,5W
Lumen Output	9,3lm
Light Source	SMD LED 6500K
Class	III
CRI	>80
Voltage	12VDC




Keenan 1

IP67 IK08 no incl. SEA SIDE SUITABLE



- 70546 Structure Matt Nickel Diffuser Transparent
- 70564 Structure Matt Nickel Diffuser Transparent

Material	Structure Aluminium
	Diffuser PC
Power	0,5W
Lumen Output	9,3lm
Light Source	SMD LED 6500K
Class	III
CRI	>80
Voltage	12VDC



Sea side suitable


FOCUSON



Keenan 70564

PROJECTORS & SPIKES

Puk 4W Puk 12.5W Puk 25W



ø36 ø59 ø85

FINISH

● Black

COLOR TEMPERATURE

2700K CRI80

3000K CRI80

BEAM ANGLE

8°

15°

20°

30°

40°

50°

ACCESSORIES



Honeycomb



Visor



Spike



Tree Fixing



Concrete Fixing



Puk 36

IP65


IK06

no incl.


SEA SIDE
SUITABLE

90°

Material	Structure Aluminium
	Diffuser Glass
Power	4W
Light Source	COB LED
Class	III
CRI	>80
Voltage	24VDC
Cable	2m



Family	Finish	Color T	Beam Angle
75300- Puk Projector ø36	2 Black	2 2700K 3 3000K	1 8° 2 20° 3 40°

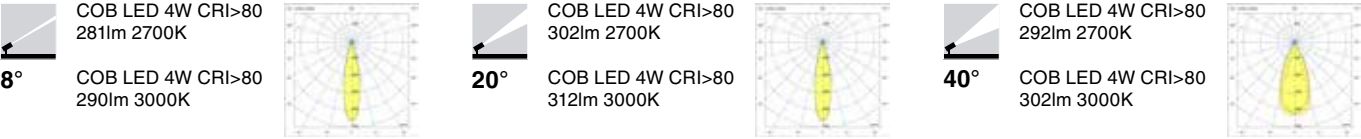

Optional drivers

24V DC	4W	220/240V	1-22 units	on/off	IP20	98324099
		220/240V	1-22 units	on/off	IP67	98324100

Optional accessories

	Puk 36 Honeycomb Accessory 75300H ● Black Material Structure Aluminium		Puk 36 Visor Accessory 75300V ● Black Material Structure Aluminium
	Puk 36/59 Tree Accessory 75300F ● Black Material Structure Aluminium		Puk 36 Spike Accessory 75300S ● Black Material Structure Polyamide

Sea side suitable

FOCUSON



Puk 75300-221 + Visor accessory 75300V

Puk 59

IP65


IK06

incl.

SEA SIDE
SUITABLE

90°

Material	Structure Aluminium
	Diffuser Glass
Power	12,5W
Lumen Output	339lm
Light Source	COB LED
Class	I
CRI	>80




Family	Finish	Color T	Beam Angle
75302- Puk Projector ø59	2 Black	2 2700K	1 15°
		3 3000K	2 30°
			3 50°

15°

COB LED 12,5W
CRI>80 339lm 2700K


COB LED 12,5W
CRI>80 349lm 3000K



30°

COB LED 12,5W
CRI>80 482lm 2700K


COB LED 12,5W
CRI>80 496lm 3000K



50°

COB LED 12,5W
CRI>80 539lm 2700K

COB LED 12,5W
CRI>80 555lm 3000K



Optional accessories

	Puk 59 Honeycomb Accessory	
	75302H	● Black
	Material	Structure Aluminium

	Puk 59 Visor Accessory	
	75302V	● Black
	Material	Structure Aluminium

	Puk 36/59 Tree Accessory	
	75300F	● Black
	Material	Structure Aluminium

	Puk 59/85 Spike Accessory	
	75302S	● Black
	Material	Structure Polyamide

	Puk 59/85 Ground Fixing Accessory	
	75302F	● Satin Stainless
	Material	Structure Stainless Steel

Puk 85

IP65


IK08

incl.

SEA SIDE
SUITABLE

90°

Material	Structure Aluminium
	Diffuser Glass
Power	25W
Lumen Output	1827lm
Light Source	COB LED
Class	I
CRI	>80




Family	Finish	Color T	Beam Angle
75303- Puk Projector ø85	2 Black	2 2700K	1 15°
		3 3000K	2 30°
			3 50°

15°

COB LED 25W CRI>80
1827lm 2700K


COB LED 25W CRI>80
1884lm 3000K



30°

COB LED 25W CRI>80
1888lm 2700K

COB LED 25W CRI>80
1947lm 3000K



50°

COB LED 25W CRI>80
1690lm 2700K

COB LED 25W CRI>80
1743lm 3000K



Optional accessories

	Puk 85 Honeycomb Accessory	
	75303H	● Black
	Material	Structure Aluminium

	Puk 85 Visor Accessory	
	75303V	● Black
	Material	Structure Aluminium

	Puk 85 Tree Accessory	
	75303F	● Black
	Material	Structure Aluminium

	Puk 59/85 Spike Accessory	
	75302S	● Black
	Material	Structure Polyamide

	Puk 59/85 Ground Fixing Accessory	
	75302F	● Satin Stainless
	Material	Structure Stainless Steel

Muur 250


IP65 IK06 incl. SEA SIDE SUITABLE 45°



71771 ● Structure Dark Grey
● Diffuser Transparent

Material	Structure Aluminium
	Diffuser Glass
Power	28,5W
Lumen Output	1877lm
Light Source	SMD LED 3000K
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz
Beam angle	36°

	Muur 250 Visor Accessory	
	71771V	● Dark Grey
	Material	Structure Aluminium

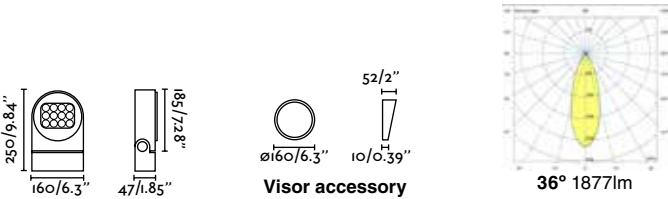

Toni
Alegre Design

IP65 IK07 SEA SIDE SUITABLE 90° 90°



71528 ● Structure Matt Black
● Diffuser Transparent

Material	Structure PC
	Diffuser PC
Light Source	1 GU10 LED PAR16 max. 5W
Bulb incl.	No
Recom. Bulb	17334
Class	II
Cable	2.5m



Double position


Sea side suitable

FOCUSON



Muur 71771


Sau M Base
13W



Sau M 156
13W



Sau M 471
13W



FINISH

● Black

COLOR TEMPERATURE

3000K CRI90

BEAM ANGLE

10°

20°

30°

10x60°

ACCESSORIES



Visor



Tree projector



Honeycomb


Sea side suitable

FOCUSON



Sau XS 85

IP65 IK05 no incl. SEA SIDE SUITABLE 160° 60°

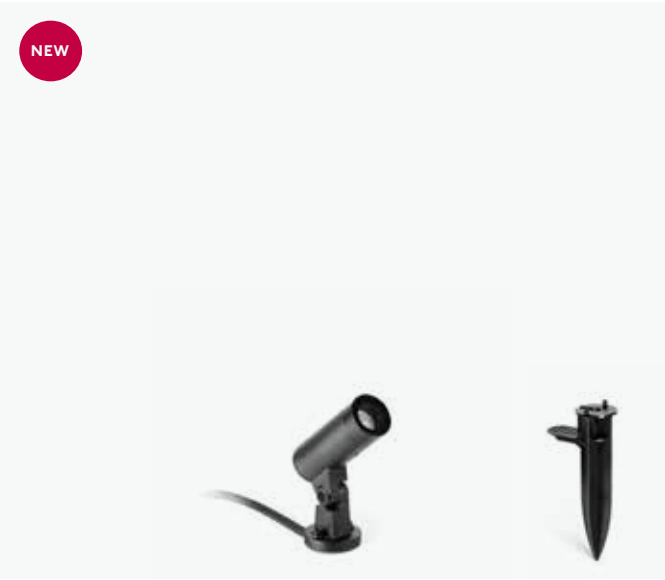

71780-2 ●● Structure Black + Black
● Diffuser Transparent

Material	Structure Aluminium + ABS
	Diffuser PC
Power	2,5W
Lumen Output	144lm
Light Source	HIGH POWER LED 3000K
Class	III
CRI	90
Voltage	24VDC
Beam angle	30°



Honeycomb Accessory

71780H ● Black

Material Structure Aluminium



Tree Fixing Accessory

71780F ● Black


Material Structure Textile



Visor Accessory


71780V ● Black

Material Structure Aluminium




Sau XS 262

IP65 IK05 no incl. SEA SIDE SUITABLE 160° 60°

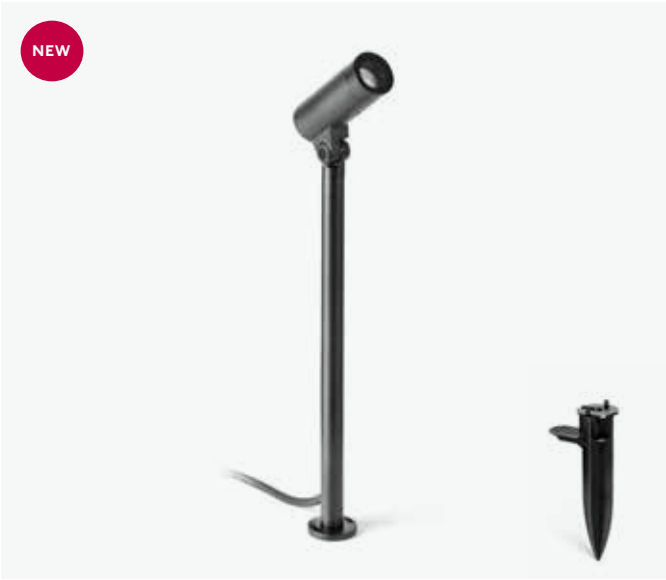

71781-2 ●● Structure Black + Black
● Diffuser Transparent

Material	Structure Aluminium + ABS
	Diffuser PC
Power	2,5W
Lumen Output	144lm
Light Source	HIGH POWER LED 3000K
Class	III
CRI	90
Voltage	24VDC
Beam angle	30°



Sea side suitable


FOCUSON



Sau 71780-2

Sau S 90

IP65 IK06 incl. SEA SIDE SUITABLE 135° 60°

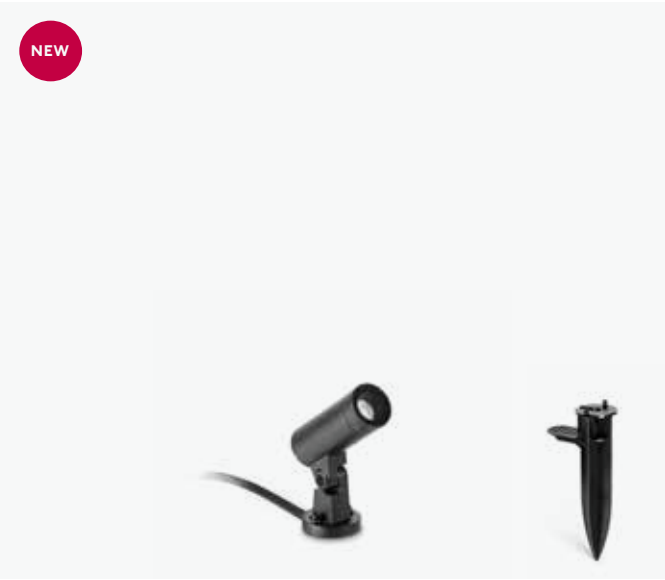

71772 ●● Structure Black + Black
● Diffuser Transparent

Material	Structure Aluminium + ABS
	Diffuser PC
Power	6W
Lumen Output	430lm
Light Source	COB LED 3000K
Class	I
CRI	>90
Voltage	220V-240V/50/60Hz
Beam angle	30°



Honeycomb Accessory
71772H ● Black

Material Structure Aluminium




Visor Accessory
71772V ● Black

Material Structure Aluminium




Tree Fixing Accessory
71780F ● Black

Material Structure Textile




Sau S 360

IP65 IK06 incl. SEA SIDE SUITABLE 135° 60°

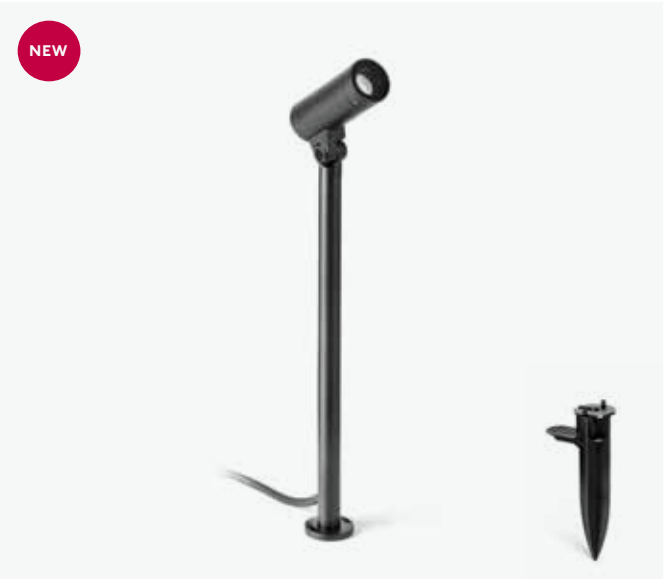

71773 ●● Structure Black + Black
● Diffuser Transparent

Material	Structure Aluminium + ABS
	Diffuser PC
Power	6W
Lumen Output	430lm
Light Source	COB LED 3000K
Class	I
CRI	>90
Voltage	220V-240V/50/60Hz
Beam angle	30°



Sea side suitable

FOCUSON



Sau 71772 + Visor accessory 71772V

Sau M 155



IP65


IK06




SEA SIDE
SUITABLE



Material	Structure Aluminium + ABS
	Diffuser PC
Power	13W
Light Source	COB LED
Class	I
CRI	>90
Voltage	220V-240V/50/60Hz



Family	Finish	Color T	Beam Angle								
71785- Sau Projector 155	2 Black	3 3000K	<table><tr><td>1</td><td>10º</td></tr><tr><td>2</td><td>20º</td></tr><tr><td>3</td><td>30º</td></tr><tr><td>4</td><td>10x60º</td></tr></table>	1	10º	2	20º	3	30º	4	10x60º
1	10º										
2	20º										
3	30º										
4	10x60º										

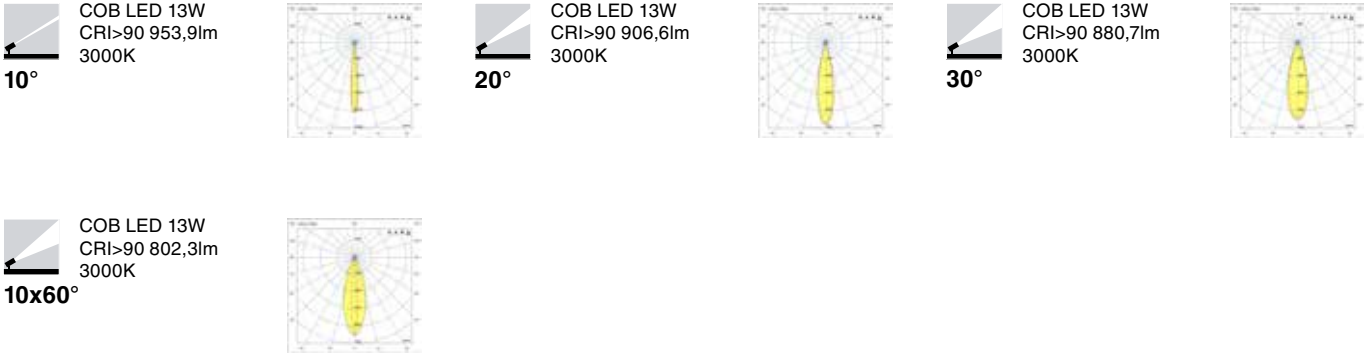

Optional accessories

Honeycomb Accessory

71785H ● Black

Material	Structure Aluminium
----------	---------------------

Visor Accessory

71785V ● Black

Material	Structure Aluminium
----------	---------------------

Tree Fixing Accessory

71785F ● Black

Material	Structure Textile
----------	-------------------



Sea side suitable

FOCUSON

Sau M 156

IP65

IK06


incl.

SEA SIDE
SUITABLE

135°

60°

Material	Structure Aluminium + ABS
	Diffuser PC
Power	13W
Lumen Output	1313lm
Light Source	COB LED
Class	I
CRI	>90
Voltage	220V-240V/50/60Hz



Family	Finish		Color T		Beam Angle	
71786-	Sau Projector 155	2 Black	3	3000K	1	10º
					2	20º
					3	30º
					4	10x60º

COB LED 13W
CRI>90 1313lm
3000K

10°

COB LED 13W
CRI>90 1313lm
3000K

20°

COB LED 13W
CRI>90 1313lm
3000K

30°

COB LED 13W
CRI>90 1313lm
3000K

10x60°

Optional accessories

Honeycomb Accessory
71785H
● Black
Material Structure Aluminium

Visor Accessory
71785V
● Black
Material Structure Aluminium

Tree Fixing Accessory
71785F
● Black
Material Structure Textile

Sau M 471

NEW

IP65

IK06


incl.

SEA SIDE
SUITABLE

135°

60°

Material	Structure Aluminium + ABS
	Diffuser PC
Power	13W
Lumen Output	953,9lm
Light Source	COB LED
Class	I
CRI	>90
Voltage	220V-240V/50/60Hz



Family	Finish		Color T		Beam Angle	
71787-	Sau Projector 155	2 Black	3	3000K	1	10º
					2	20º
					3	30º
					4	10x60º

COB LED 13W
CRI>90 953,9lm
3000K

10°

COB LED 13W
CRI>90 906,6lm
3000K

20°

COB LED 13W
CRI>90 880,7lm
3000K

30°

COB LED 13W
CRI>90 802,3lm
3000K

10x60°

Optional accessories

Honeycomb Accessory
71785H
● Black
Material Structure Aluminium

Visor Accessory
71785V
● Black
Material Structure Aluminium

Tree Fixing Accessory
71785F
● Black
Material Structure Textile

CEILING

Puk

4.5W

Puk

7W

ø58

ø76

FINISH

☐ White

☒ Black

COLOR TEMPERATURE

2700K CRI90

3000K CRI90

BEAM ANGLE

15°

30°

50°

Sea side suitable

FOCUSON

Puk 75304-123


52

53

Puk 58

IP65 IK06 incl. SEA SIDE SUITABLE

Material	Structure Aluminium
	Diffuser Glass
Power	4,5W
Light Source	COB LED
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz




Family	Finish	Color T	Beam Angle
75304- Puk Ceiling ø58 4.5W	1 White	2 2700K	1 15°
	2 Black	3 3000K	2 30°
			3 50°

 COB LED 4,5W CRI>80 297lm 2700K	 COB LED 4,5W CRI>80 341lm 2700K	 COB LED 4,5W CRI>80 350lm 2700K
 COB LED 4,5W CRI>80 307lm 3000K	 COB LED 4,5W CRI>80 352lm 3000K	 COB LED 4,5W CRI>80 361lm 3000K

Puk 76

IP65 IK06 incl. SEA SIDE SUITABLE

Material	Structure Aluminium
	Diffuser Glass
Power	7W
Light Source	COB LED
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz



Family	Finish	Color T	Beam Angle
75305- Puk Ceiling ø76 7W	1 White	2 2700K	1 15°
	2 Black	3 3000K	2 30°
			3 50°

 COB LED 7W CRI>80 573lm 2700K	 COB LED 7W CRI>80 610lm 2700K	 COB LED 7W CRI>80 620lm 2700K
 COB LED 7W CRI>80 591lm 3000K	 COB LED 7W CRI>80 629lm 3000K	 COB LED 7W CRI>80 640lm 3000K

Dakron


IP65 IK10 SEA SIDE SUITABLE



70722


- Structure Matt White
- Diffuser Opal

Material	Structure ABS
	Diffuser PC
Light Source	1 E27 LED A60 max. 15W
Bulb incl.	No
Recom. Bulb	17463
Class	II



Sea side suitable

FOCUSON

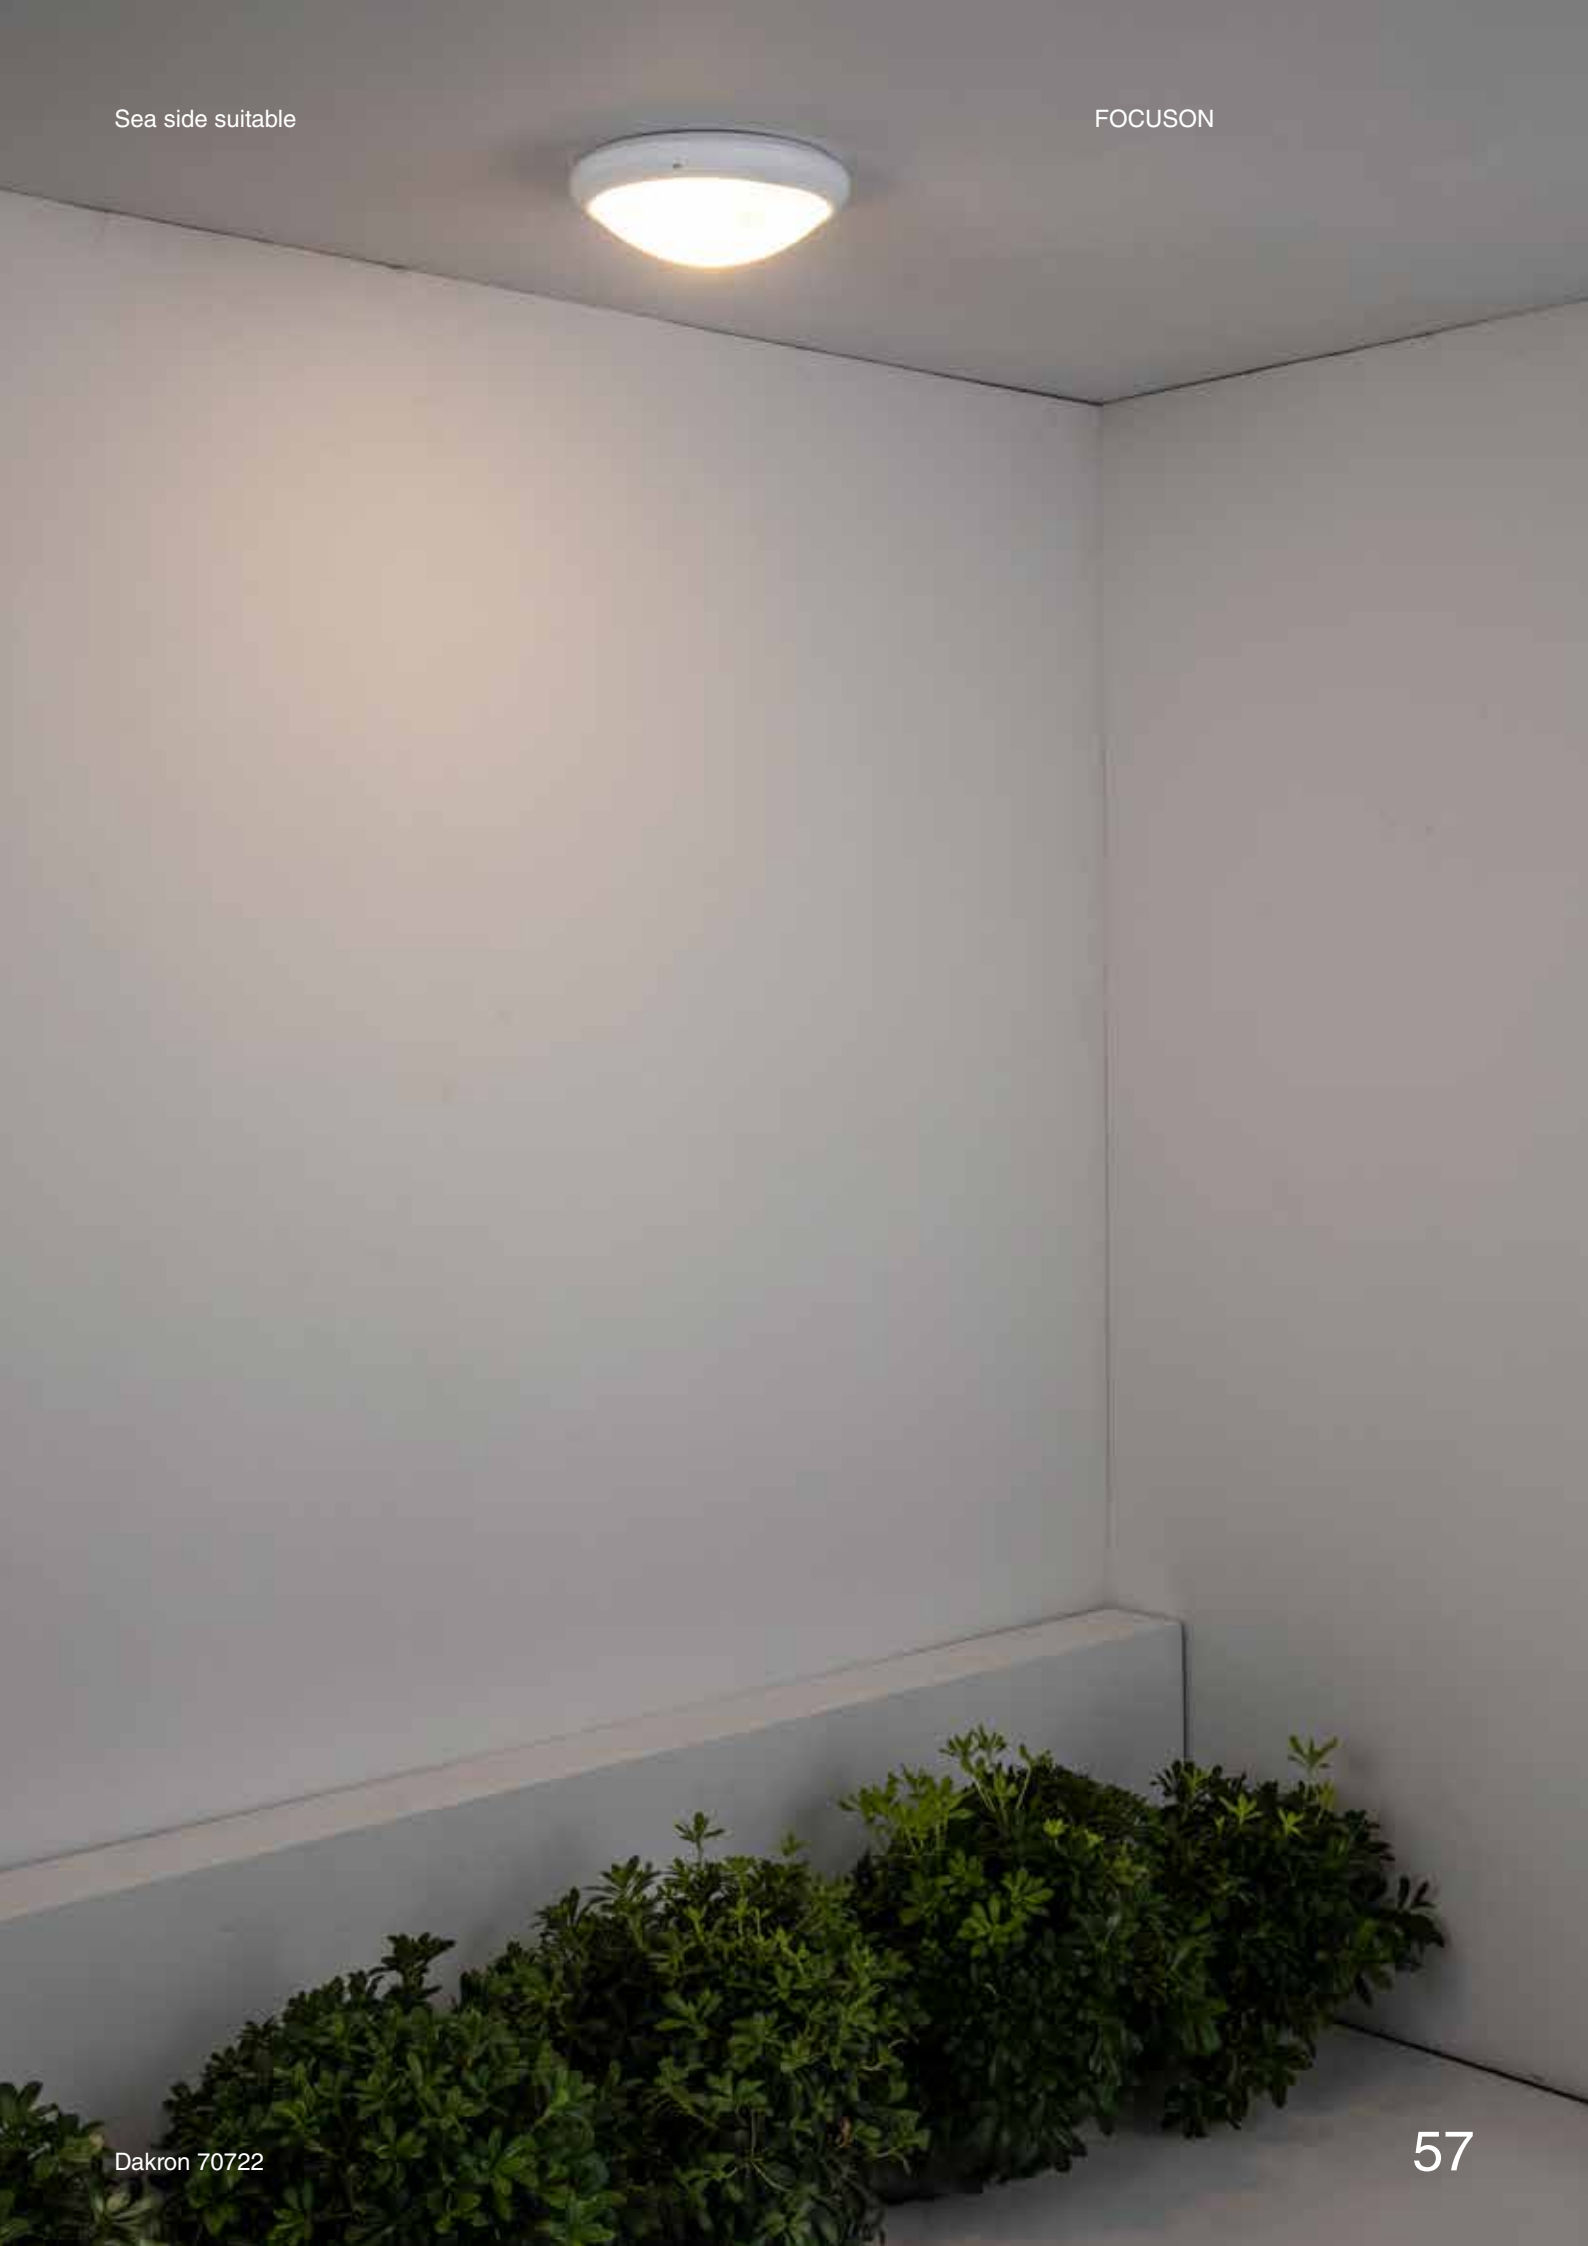

Dakron 70722

WALL

Grot 160 Wall

Faro Lab

IP55

IK06

incl.


SEA SIDE
SUITABLE

IP68
CONNECTOR



75630	● Structure Grey
2700K 122lm	
75633	● Structure Grey
3000K 173lm	

Material	Structure Concrete
Power	6,5W
Light Source	SMD LED
Class	II
CRI	≥80
Voltage	100V-277V/50/60Hz




Sea side suitable

FOCUSON




Grot 75633

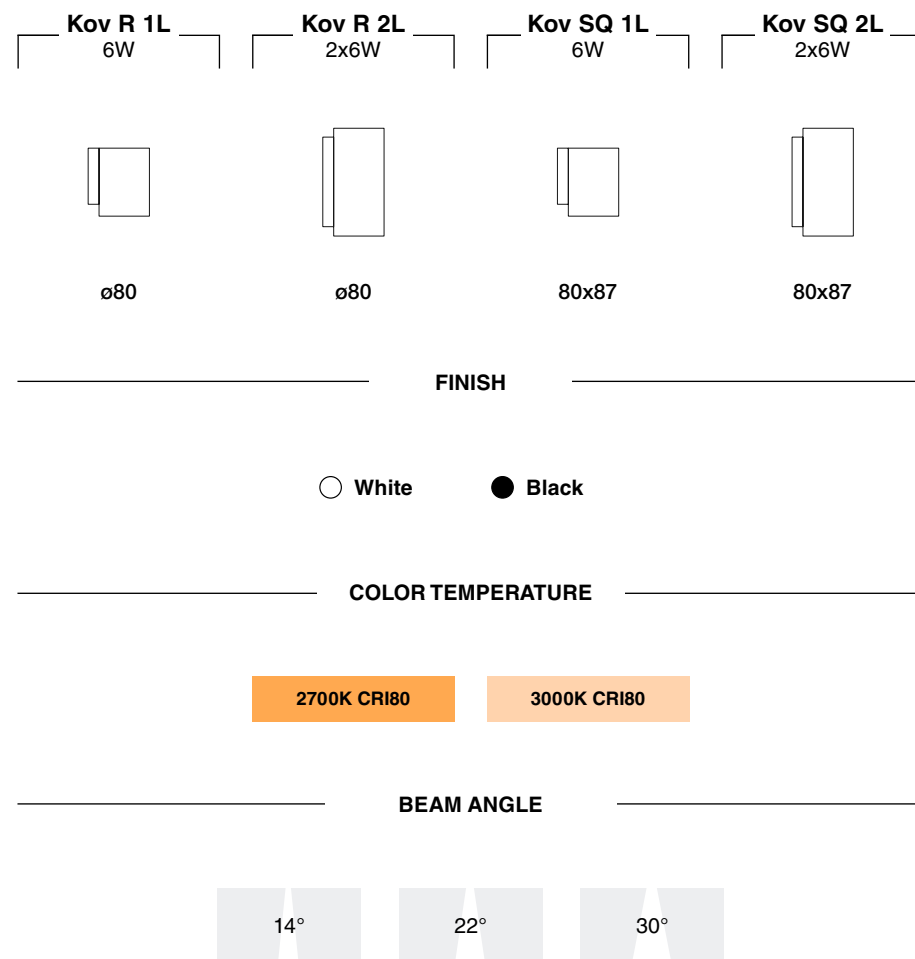


Kov R 1L

IP65 IK05 incl. SEA SIDE SUITABLE

Material	Structure Aluminium
Power	6W
Light Source	COB LED
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz




Family	Finish	Color T	Beam Angle
71790- Kov Rounded 1 light	1 White	2 2700K	1 14°
	2 Black	3 3000K	2 22°
			3 30°



Kov R 2L


IP65 IK05 incl. SEA SIDE SUITABLE

Material	Structure Aluminium
Power	2x6W
Light Source	COB LED
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz



Family	Finish	Color T	Beam Angle*
71791- Kov Rounded 2 lights	1 White	2 2700K	1 14°/14°
	2 Black	3 3000K	2 14°/22°
			3 22°/22°
			4 22°/30°
			5 30°/30°
			6 30°/14°

*NOTE: You can choose the same or different beam angle for each side of the product



Kov SQ 1L


IP65

IK05




incl.

SEA SIDE
SUITABLE

Material	Structure Aluminium
Power	6W
Light Source	COB LED
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz



Family		Finish		Color T		Beam Angle	
71792-	Kov Squared 1 light	1	White	2	2700K	1	14º
		2	Black	3	3000K	2	22º
						3	30º



Kov R 1L


IP65

IK05

incl.




SEA SIDE
SUITABLE

Material	Structure Aluminium
Power	2x6W
Light Source	COB LED
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz



Family		Finish		Color T		Beam Angle	
71793-	Kov Squared 2 lights	1	White	2	2700K	1	14º/14º
		2	Black	3	3000K	2	14º/22º
						3	22º/22º
						4	22º/30º
						5	30º/30º
						6	30º/14º

*NOTE: You can choose the same or different beam angle for each side of the product




Future
Estudi Ribaudí

IP44 IK08 SEA SIDE SUITABLE



- 71516 ● Structure Matt White
● Diffuser Opal
- 71517 ● Structure Dark Grey
● Diffuser Opal

Material	Structure PC
	Diffuser PC
Power	15W
Light Source	E27 LED
Class	II
Voltage	100V-240V/50/60Hz




View
Estudi Ribaudí

IP54 SEA SIDE SUITABLE



- 71519 ● Structure Dark Grey
● Diffuser Opal

Material	Structure ABS + PC
	Diffuser PP
Light Source	1 E27 LED A60 max. 15W
Bulb incl.	No
Recom. Bulb	17463
Class	II



Sea side suitable

FOCUSON



View 71519

Luma Wall
Faro Lab

IP65

IK06

SEA SIDE
SUITABLE





NEW



74456

● **Structure** Dark Grey
● **Diffuser** Transparent

Material	Structure Aluminium
	Diffuser PC
Power	5W
Lumen Output	525,5lm
Light Source	LED MODULE 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Beam angle	120°
Battery	4/6 Charge



A sustainable savings option
Luma optimizes every resource: solar energy to reduce consumption, advanced optics to maximize performance, and a wireless operation that simplifies installation. Technology, design, and sustainability—all in service of efficiency.



Smart motion sensor
Luma's motion sensor offers three modes: permanent on, total off, or 20% light that ramps up to 100% when motion is detected. An intelligent system that enhances comfort, reduces consumption, and extends battery life.

Sea side suitable

FOCUSON



Block 135
Àlex & Manel Llusçà

IP65 IK06 SEA SIDE SUITABLE



74139 Structure Grey
Diffuser Opal

Material	Structure Concrete
	Diffuser Glass
Light Source	1 E27 LED G45 max. 15W
Bulb incl.	No
Recom. Bulb	17462
Class	I




Tond 2L

IP54 IK06 incl. SEA SIDE SUITABLE



71918 Structure Dark Grey
Diffuser Transparent

Material	Structure Aluminium
	Diffuser Glass
Power	2x6W
Lumen Output	422lm
Light Source	COB LED 3000K
Class	I
CRI	≥80
Voltage	220V-240V/50/60Hz
Beam angle	50°



Sea side suitable

FOCUSON



Block 74139

Mask
Lucid Product Design


IP65 IK06 incl. SEA SIDE SUITABLE



71279

- Structure Dark Grey
- Diffuser Opal

Material	Structure Aluminium
	Diffuser Glass
Power	15W
Lumen Output	550lm
Light Source	SMD LED 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz



Sea side suitable

FOCUSON



Mask 71279

Tom 190

IP65

IK10



SEA SIDE
SUITABLE



- 70665
- Structure Matt White
 - Diffuser Opal

Material	Structure ABS
	Diffuser PC
Power	7W
Lumen Output	400lm
Light Source	SMD LED 3000K
Class	II
CRI	>80
Voltage	220V-240V/50/60Hz

Tom 220

IP65

IK10




SEA SIDE
SUITABLE



- 70682
- Structure Dark Grey
 - Diffuser Opal
- 70683
- Structure Matt White
 - Diffuser Opal

Material	Structure ABS
	Diffuser PC
Power	11W
Lumen Output	600lm
Light Source	SMD LED 3000K
Class	II
CRI	>80
Voltage	220V-240V/50/60Hz



Fred 200

IP65

IK10



SEA SIDE
SUITABLE



- 70663
- Structure Dark Grey
 - Diffuser Opal
- 70664
- Structure Matt White
 - Diffuser Opal

Material	Structure ABS
	Diffuser PC
Power	7W
Lumen Output	546lm
Light Source	SMD LED 3000K
Class	II
CRI	>80
Voltage	220V-240V/50/60Hz



Fred 245

IP65

IK10



SEA SIDE
SUITABLE




- 70667
- Structure Dark Grey
 - Diffuser Opal
- 70668
- Structure Matt White
 - Diffuser Opal

Material	Structure ABS
	Diffuser PC
Power	11W
Lumen Output	873lm
Light Source	SMD LED 3000K
Class	II
CRI	>80
Voltage	220V-240V/50/60Hz




Dune R

IP65 IK07 incl. SEA SIDE SUITABLE DIM

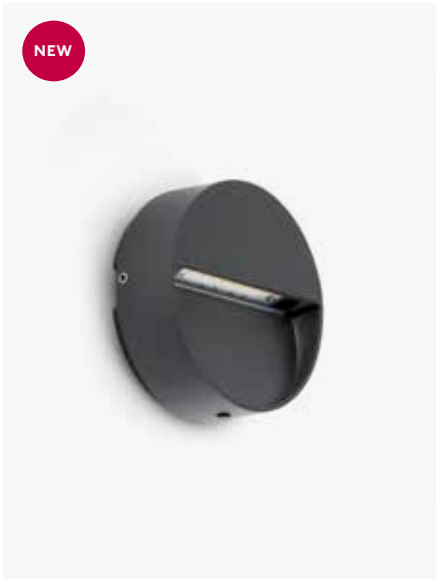

- 71960 Structure Dark Grey
Diffuser Transparent
- 71961 Structure Matt White
Diffuser Transparent
- 71962 Structure Rust Brown
Diffuser Transparent

Material	Structure Aluminium
	Diffuser PC
Power	3W
Lumen Output	91/100/105/115lm
Light Source	SMD LED 2200/ 2700/ 3200/ 4000K
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz
Beam angle	120°




Dune SQ

IP65 IK07 incl. SEA SIDE SUITABLE DIM



- 71963 Structure Dark Grey
Diffuser Transparent
- 71964 Structure Matt White
Diffuser Transparent
- 71965 Structure Rust Brown
Diffuser Transparent

Material	Structure Aluminium
	Diffuser PC
Power	3W
Lumen Output	91/98/103/112lm
Light Source	SMD LED 2200/ 2700/ 3200/ 4000K
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz
Beam angle	120°




Dune RCT

IP65 IK07 incl. SEA SIDE SUITABLE DIM



- 71966 Structure Dark Grey
Diffuser Transparent
- 71967 Structure Matt White
Diffuser Transparent
- 71968 Structure Rust Brown
Diffuser Transparent

Material	Structure Aluminium
	Diffuser PC
Power	6W
Lumen Output	111/121/127/139lm
Light Source	SMD LED 2200/ 2700/ 3200/ 4000K
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz
Beam angle	120°



Sea side suitable

FOCUSON



Dune 71962


Grant R

IP65 IK10 incl. SEA SIDE SUITABLE



70656 Structure Dark Grey Diffuser Transparent

Material	Structure ABS
	Diffuser PC
Power	1W
Lumen Output	65lm
Light Source	SMD LED 3000K
Class	II
CRI	>80
Voltage	100V-240V/50/60Hz
Beam angle	120°




Grant SQ

IP65 IK10 incl. SEA SIDE SUITABLE



70655 Structure Dark Grey Diffuser Transparent

Material	Structure ABS
	Diffuser PC
Power	1W
Lumen Output	65lm
Light Source	SMD LED 3000K
Class	II
CRI	>80
Voltage	100V-240V/50/60Hz
Beam angle	120°




Drak

IP44 IK08 incl. SEA SIDE SUITABLE



72330 Structure Brass Diffuser Transparent

Material	Structure Aluminium
	Diffuser PMMA
Power	4,5W
Lumen Output	160lm
Light Source	SMD LED 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz



Sea side suitable

FOCUSON



Grant 70655


Must 96

IP65 IK10 incl. SEA SIDE SUITABLE



70657 Structure Dark Grey
Diffuser Transparent

Material	Structure ABS
	Diffuser PC
Power	2W
Lumen Output	101lm
Light Source	SMD LED 3000K
Class	II
CRI	>80
Voltage	220V-240V/50/60Hz




Must 158

IP65 IK10 incl. SEA SIDE SUITABLE



70658 Structure Dark Grey
Diffuser Transparent

Material	Structure ABS
	Diffuser PC
Power	3W
Lumen Output	161lm
Light Source	SMD LED 3000K
Class	II
CRI	>80
Voltage	220V-240V/50/60Hz




Must 217

IP65 IK10 incl. SEA SIDE SUITABLE



70659 Structure Dark Grey
Diffuser Transparent

Material	Structure ABS
	Diffuser PC
Power	4W
Lumen Output	276lm
Light Source	SMD LED 3000K
Class	II
CRI	>80
Voltage	220V-240V/50/60Hz



Sea side suitable

FOCUSON



Must 70658

RECESSED


Geiser 130 Wallwasher

IP67 IK08 incl. SEA SIDE SUITABLE incl.



70311 ● Structure Satin Stainless

Material	Structure Stainless Steel 316L + Aluminium
Power	7,5W
Lumen Output	283lm
Light Source	COB LED 3000K
Class	II
CRI	>80
Voltage	220V-240V/50/60Hz
Cut out	ø120x130mm
Resistance	1000Kg




Geiser 180 Wallwasher

IP67 IK08 incl. SEA SIDE SUITABLE incl.



70312 ● Structure Satin Stainless

Material	Structure Stainless Steel 316L + Aluminium
Power	12,5W
Lumen Output	464lm
Light Source	COB LED 3000K
Class	II
CRI	>80
Voltage	220V-240V/50/60Hz
Cut out	ø164x190mm
Resistance	1000Kg



Sea side suitable

FOCUSON



Geiser 70311

Geiser 130

IP67

IK08

incl.

SEA SIDE
SUITABLE

25°



20°

incl.



70302	●● Structure Satin Stainless + Matt Black
10° 370lm	● Diffuser Transparent
70303	●● Structure Satin Stainless + Matt Black
38° 393lm	● Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	6,5W
Light Source	COB LED 3000K
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz
Cut out (mm)	ø90x135mm
Resistance	2000Kg



Geiser 180

IP67

IK08

incl.

SEA SIDE
SUITABLE

25°



20°

incl.



70308	● Structure Satin Stainless
10° 1066lm	● Diffuser Transparent
70309	● Structure Satin Stainless
38° 968lm	● Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	12,5W
Light Source	COB LED 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Cut out (mm)	ø165x190mm
Resistance	2000Kg



Sea side suitable

FOCUSON



Geiser 70303


Geiser 130 GU10

IP67 IK08 SEA SIDE SUITABLE 25° 20° incl.



70310 Structure Satin Stainless Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Light Source	1 GU10 LED PAR16 max. 8W
Bulb incl.	No
Recom. Bulb	17334
Class	I
Cut out	ø125x135mm
Resistance	2000Kg





Geiser 260

IP67 IK08 incl. SEA SIDE SUITABLE 20° incl.



70306 10° 1997lm Structure Satin Stainless + Matt Black Diffuser Transparent
70307 38° 1800lm Structure Satin Stainless + Matt Black Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	29W
Light Source	COB LED 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Cut out (mm)	ø200x265mm
Resistance	2000Kg



Sea side suitable

FOCUSON



Geiser 70310



Geiser 130 Ceiling

IP67 IK08 incl. SEA SIDE SUITABLE no incl.



70305 Structure Satin Stainless + Matt Black
Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	6,5W
Lumen Output	242lm
Light Source	COB LED 3000K
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz
Beam angle	38°
Cut out	ø80x120mm




Geiser 130 GU10 Ceiling

IP67 IK08 SEA SIDE SUITABLE 40° no incl.



70304 Structure Satin Stainless + Matt Black
Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Light Source	1 GU10 LED PAR16 max. 8W
Bulb incl.	No
Recom. Bulb	17324
Class	I
Cut out	ø80x120mm



Sea side suitable

FOCUSON



Geiser 70304



Suria 120

IP67 IK08 incl. SEA SIDE SUITABLE incl.



70588	●● Structure Satin Stainless + Matt Black
24° 319lm	● Diffuser Transparent
70592N	●● Structure Satin Stainless + Matt Black
60° 272lm	● Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	3W
Light Source	COB LED 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Cut out (mm)	ø100x95mm
Resistance	1000Kg




Suria 180

IP67 IK08 incl. SEA SIDE SUITABLE incl.



70589	●● Structure Satin Stainless + Matt Black
24° 981lm	● Diffuser Transparent
70593N	●● Structure Satin Stainless + Matt Black
60° 1144lm	● Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	12W
Light Source	COB LED 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Cut out (mm)	ø165x125mm
Resistance	1000Kg



Sea side suitable

FOCUSON



Suria 70589

Suria 220

IP67

IK08






SEA SIDE
SUITABLE



70586
24° 2200lm
●● **Structure** Satin Stainless + Matt Black
● **Diffuser** Transparent

70587
60° 1270lm
●● **Structure** Satin Stainless + Matt Black
● **Diffuser** Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	24W
Light Source	COB LED 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Cut out (mm)	ø200x130mm
Resistance	1000Kg



Sea side suitable

FOCUSON



Suria 70586

Grund 21


IP67

IK07

no incl.

SEA SIDE
SUITABLE


incl.

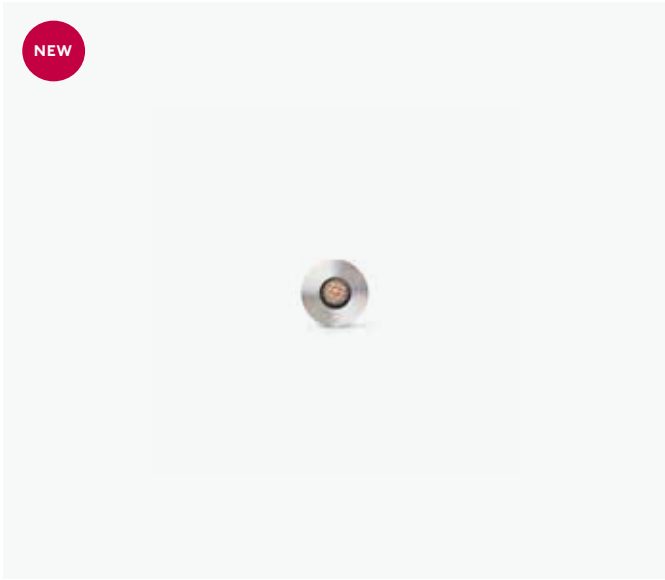

70851	● Structure Brushed Stainless Steel
2700K 37lm	● Diffuser Transparent
70852	● Structure Black
2700K 38,4lm	● Diffuser Transparent
70853	● Structure Brushed Stainless Steel
3000K 37lm	● Diffuser Transparent
70854	● Structure Black
3000K 38,4lm	● Diffuser Transparent

Material	Structure Stainless Steel
	Diffuser Glass
Power	1W
Light Source	LED MODULE
Class	III
CRI	92
Voltage	24VDC
Voltage	220
Beam angle	36°
Cut out	16mm
Resistance	1000Kg

*Drivers info pag. 478




Grund 37

IP67

no incl.

SEA SIDE
SUITABLE



incl.

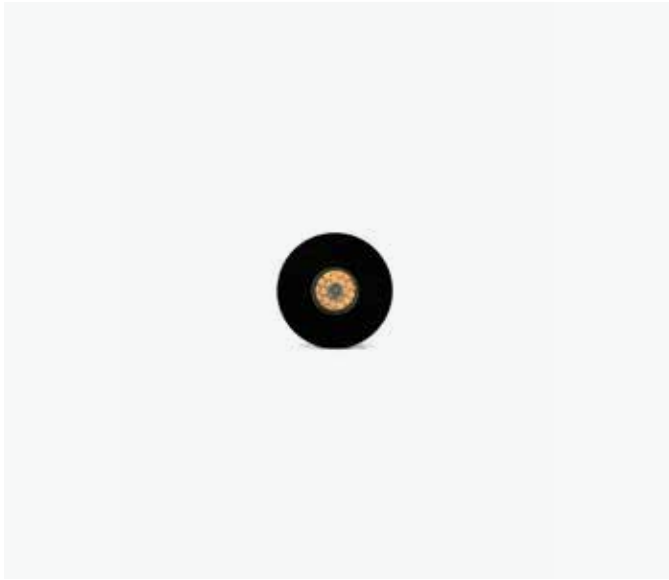

70726	● Structure Satin Stainless + Matt Black
3000K 110lm	● Diffuser Transparent
70730	● Structure Anodized Black + Matt Black
3000K 110lm	● Diffuser Transparent
70733	● Structure Satin Stainless
2700K 77lm	● Diffuser Transparent
70735	● Structure Anodized Black
2700K 77lm	● Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	2W
Light Source	SMD LED
Class	III
CRI	>90
Beam angle	15°
Cut out	ø32mm
Resistance	1000Kg

*Drivers info pag. 478



Grund 70851

Grund 80



IP67 no incl. SEA SIDE SUITABLE incl.



70731	●● Structure Anodized Black + Anodized Black
3000K 420lm	● Diffuser Transparent
70736	●● Structure Anodized Black
2700K 191lm	● Diffuser Transparent
70728	●● Structure Satin Stainless + Matt Black
3000K 272lm	● Diffuser Transparent
70734	●● Structure Satin Stainless
2700K 191lm	● Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	7W
Light Source	COB LED
Class	III
CRI	>90
Beam angle	36°
Cut out	ø60mm
Resistance	1000Kg

*Drivers info pag. 478



Grund 92



IP67 no incl. SEA SIDE SUITABLE incl.



70732	●● Structure Anodized Black + Matt Black
3000K 640lm	● Diffuser Transparent
70729	●● Structure Satin Stainless + Matt Black
3000K 640lm	● Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	13W
Light Source	COB LED
Class	III
CRI	>90
Beam angle	36°
Cut out	ø68mm
Resistance	1000Kg

*Drivers info pag. 478



Grund 80 Wallwasher


IP67

IK07

no incl.

SEA SIDE
SUITABLE


incl.

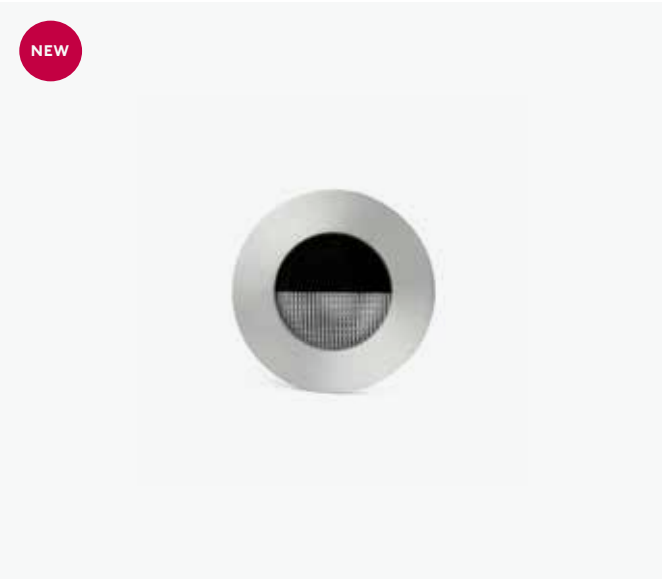

70856	● Structure Black
2700K 221lm	● Diffuser Transparent
70858	● Structure Black
3000K 411lm	● Diffuser Transparent
70855	● Structure Brushed Stainless Steel
2700K 214lm	● Diffuser Transparent
70857	● Structure Brushed Stainless Steel
3000K 400lm	● Diffuser Transparent

Material	Structure Aluminium
	Diffuser Glass
Power	7W
Light Source	LED MODULE
Class	III
CRI	92
Voltage	24VDC
Cut out	60mm
Resistance	1000Kg

*Drivers info pag. 478



Grund 92 Wallwasher


IP67

IK07

no incl.

SEA SIDE
SUITABLE


incl.

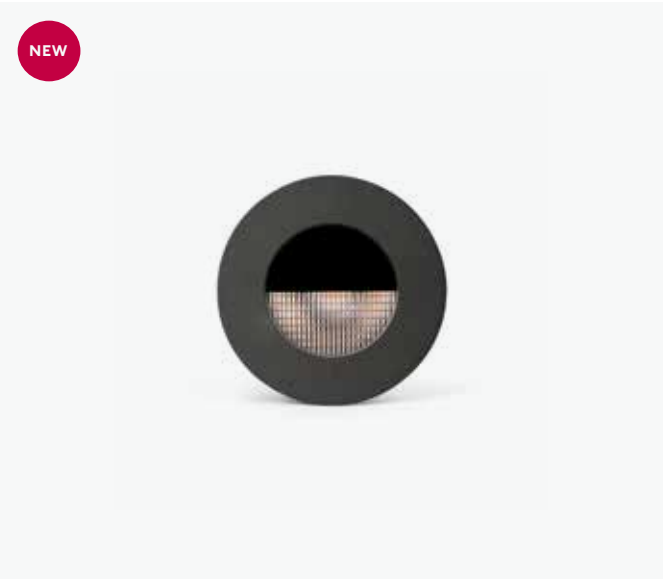

70860	● Structure Black
2700K 221lm	● Diffuser Transparent
70862	● Structure Black
3000K 411lm	● Diffuser Transparent
70859	● Structure Brushed Stainless Steel
2700K 214lm	● Diffuser Transparent
70861	● Structure Brushed Stainless Steel
3000K 400lm	● Diffuser Transparent

Material	Structure Aluminium
	Diffuser Glass
Power	13W
Light Source	LED MODULE
Class	III
CRI	92
Voltage	24VDC
Cut out	68mm
Resistance	1000Kg

*Drivers info pag. 478



Sea side suitable

FOCUSON




Grund GU10

IP67 IK08 SEA SIDE SUITABLE incl.



70870	● Structure Satin Aluminium ● Diffuser Transparent
70871	● Structure Anodized Black ● Diffuser Transparent

Material	Structure Stainless Steel Diffuser Glass
Light Source	1 GU10 LED max. 5W
Bulb incl.	No
Recom. Bulb	17334
Class	II
Cut out	76mm
Resistance	1000Kg



Sea side suitable


FOCUSON



Grund 70871

Kane 1

IP67 no incl. SEA SIDE SUITABLE incl.

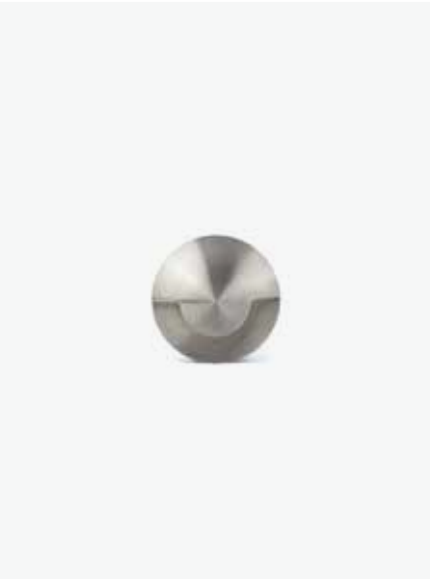


70660 3000K 18,7lm
70660W 2700K 18,7lm

Structure Satin Stainless
Diffuser Opal
Structure Satin Stainless
Diffuser Transparent

Material	Structure Stainless Steel 316L
	Diffuser Glass
Power	3W
Light Source	COB LED
Class	III
CRI	>80
Voltage	24VDC
Beam angle	120°
Cut out	ø40mm
Resistance	1000Kg

*Drivers info pag. 478

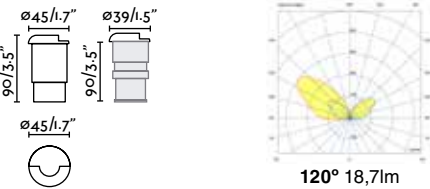

Kane 2

IP67 no incl. SEA SIDE SUITABLE incl.




70661 3000K 20,7lm
70661W 2700K 20,7lm

Structure Satin Stainless
Diffuser Opal
Structure Satin Stainless
Diffuser Transparent

Material	Structure Stainless Steel 316L
	Diffuser Glass
Power	3W
Light Source	COB LED
Class	III
CRI	>80
Voltage	24VDC
Beam angle	120°
Cut out	ø40mm
Resistance	1000Kg

*Drivers info pag. 478

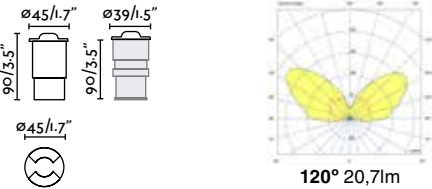

Kane 3

IP67 no incl. SEA SIDE SUITABLE incl.




70662 3000K 17,6lm
70662W 2700K 17,6lm

Structure Satin Stainless
Diffuser Opal
Structure Satin Stainless
Diffuser Transparent

Material	Structure Stainless Steel 316L
	Diffuser Glass
Power	3W
Light Source	COB LED
Class	III
CRI	>80
Voltage	24VDC
Beam angle	120°
Cut out	ø40mm
Resistance	1000Kg

*Drivers info pag. 478

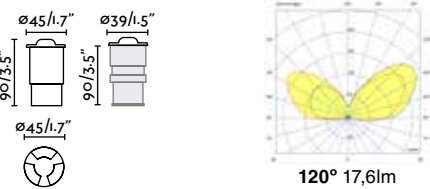

Sea side suitable


FOCUSON



Kane 70660W

Crosby 24V

IP67 no incl. SEA SIDE SUITABLE incl.

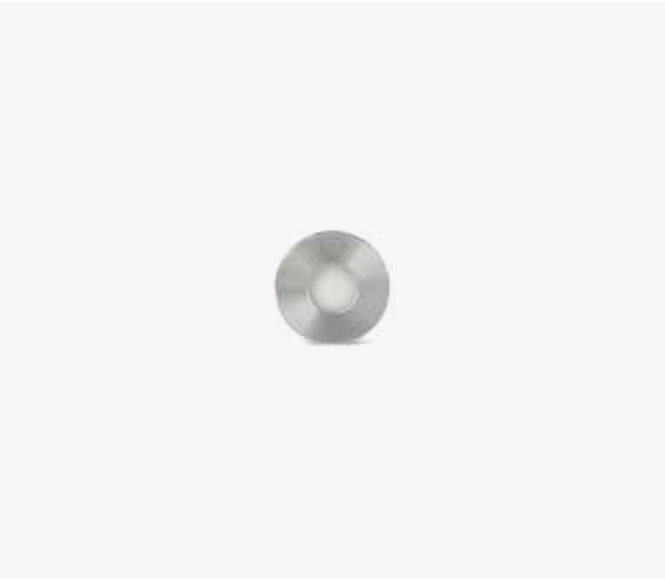

70453 Structure Satin Stainless + Matt Black
Diffuser Opal

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	0,7W
Lumen Output	12lm
Light Source	SMD LED 3000K
Class	III
CRI	>80
Voltage	24VDC
Beam angle	120°
Cut out	ø90x156mm

Crosby




IP67 incl. SEA SIDE SUITABLE incl.



70459N Structure Satin Stainless + Matt Black
Diffuser Opal

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	1W
Lumen Output	12lm
Light Source	SMD LED 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Beam angle	120°
Cut out	ø80x100mm

*Drivers info pag. 478




Led18 R

IP67 IK08 incl. SEA SIDE SUITABLE incl.




71498N Structure Satin Stainless
Diffuser Opal

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	3W
Lumen Output	51lm
Light Source	SMD LED 3000K
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz
Cut out	ø90x65mm
Resistance	1000Kg




Led18 SQ

IP67 IK08 incl. SEA SIDE SUITABLE incl.

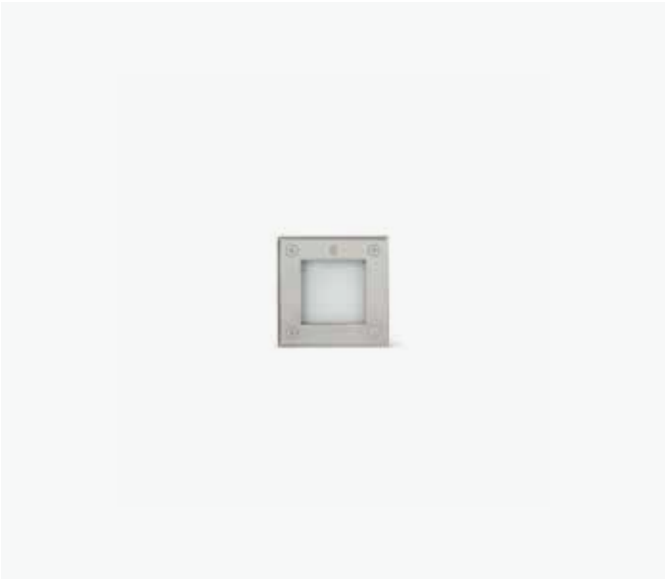

71499N Structure Satin Stainless
Diffuser Opal

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	3W
Lumen Output	192lm
Light Source	SMD LED 3000K
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz
Cut out	80x70x80mm
Resistance	1000Kg




Taro

IP67 incl. SEA SIDE SUITABLE incl.



70449 Structure Satin Stainless Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	7W
Lumen Output	280lm
Light Source	COB LED 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Beam angle	30°
Cut out	ø90x135mm
Resistance	600Kg




Tecno

IP67 IK08 SEA SIDE SUITABLE incl.



71489N Structure Satin Stainless Diffuser Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	8W
Light Source	GU10 LED
Class	I
Voltage	100V-240V/50/60Hz
Cut out	ø100x125mm
Resistance	2000Kg



Sea side suitable

FOCUSON



Tecno 71489N

Salt Asymm

IP67

IK08





SEA SIDE
SUITABLE



70591

●● **Structure** Satin Stainless + Matt Black
● **Diffuser** Transparent

Material	Structure Stainless Steel 316L + Aluminium
	Diffuser Glass
Power	9W
Lumen Output	961lm
Light Source	COB LED 3000K
Class	I
CRI	≥80
Voltage	100V-240V/50/60Hz
Beam angle	45°
Cut out	ø180x122mm
Resistance	2000Kg



Curtis Asymm

IP67



SEA SIDE
SUITABLE



70462N

●● **Structure** Satin Stainless + Matt Black
● **Diffuser** Transparent

Material	Structure Aluminium
	Diffuser Glass
Power	2W
Lumen Output	180lm
Light Source	COB LED 3000K
Class	I
CRI	>80
Voltage	100V-240V/50/60Hz
Cut out	ø80x100mm

Sea side suitable

FOCUSON



Salt 70591

Poma

IP65

IK07



SEA SIDE
SUITABLE

DIM



NEW




71969

● **Structure** Dark Grey
● **Diffuser** Transparent

Material	Structure Aluminium
	Diffuser PC
Power	3W
Lumen Output	85/89/92/95lm
Light Source	SMD LED 2200/ 2700/ 3200/ 4000K
Class	I
CRI	>80
Voltage	220V-240V/50/60Hz
Beam angle	120°
Cut out	114mm

Ø114/4.48"



41/1.61"



114

Sea side suitable

FOCUSON

Poma 71696



115



70446 Structure Satin Stainless Diffuser Transparent

Material	Structure Stainless Steel 316L + Glass
	Diffuser Glass
Power	3W
Lumen Output	48lm
Light Source	COB LED 3000K
Class	III
CRI	>80
Voltage	24VDC
Beam angle	40°
Cut out	ø63x115mm

*Drivers info pag. 478



Dang 70446

FOCUSON

Sea side suitable

Sea side suitable

FOCUSON



FAN

Outwood
Faro Lab



Outwood 34360

Size

Tamaño



L
ø1500/59.1"

Finish

Acabado



Dark Brown
Oak



Matt White
Oak



Dark Brown
Dark Walnut



Matt White
Matt White

Light Kit

Kit de luz



Standard

E27 BULB

Mounting

Montaje



Surface

Control system

Sistema de control



Smart Wi-Fi



Wired wall controller



Remote control



0-10V/1-10V



Fan features

Material	Structure Steel
	Blades ABS
	Diffuser Glass



Light Kit



Realistic wood-finish
ABS blades



Glass diffuser



IP44



Smart option



RF Model
Memory function page 27



Model	Size	Structure	Blades	Mounting	Control type
34360	L	Dark Brown	Oak	Surface	Remote Control RF
34361	L	Matt White	Oak		WT Remote + Smart Wi-Fi
34362	L	Dark Brown	Dark Walnut		VC 0-10V/1-10V Active/Passive
34363	L	Matt White	Matt White		RW White Wired Wall Controller
					RB Black Wired Wall Controller


Example 34361VC — OUTWOOD L Ø1500 White/oak ceiling fan 0-10V

Air performance

Size	Airflow (m3 min)	RPM	Power (W)
L	ø1500/59.1"	101-120-138-154-170-187	73-92-108-127-141-152
			5-8-12-18-25-35

Measurements

Surface
L
A: 265/10.43" A1: 220/8.66" F: ø1500/59.1"



Tunable white

Model	Size	Structure	Blades	Mounting	Control type	Light Model
34360	L	Dark Brown	Oak	Surface	Remote Control RF	1B Standard
34361	L	Matt White	Oak		WT Remote + Smart Wi-Fi	
34362	L	Dark Brown	Dark Walnut		VC 0-10V/1-10V Active/Passive	
34363	L	Matt White	Matt White		RW White Wired Wall Controller	
					RB Black Wired Wall Controller	

Example 34360RW1B — OUTWOOD L Ø1500 Brown/oak ceiling fan 1xE27 White Wall Control

Air performance


Size	Airflow (m3 min)	RPM	Power (W)
L	ø1500/59.1"	101-120-138-154-170-187	73-92-108-127-141-152
			5-8-12-18-25-35

Lighting features

Light Source	1 E27 LED max. 15W
Recom. Bulb	17463

Measurements

Surface
L
A: 430/16.93" A1: 220/8.66" F: ø1500/59.1"



Typhoon

Jordi Busquets



Size

Tamaño



M

ø1270/50"

Finish

Acabado



Matt White
Matt White



Dark Brown
Brown



Matt White
Maple



Brown
Maple

Light Kit

Kit de luz



Standard

3000K CRI >80

Mounting

Montaje



Surface

Control system

Sistema de control



Remote control

Typhoon 33490



Typhoon 34105-130



Light Kit

Fan features

Material	Structure Steel
	Blades ABS
	Diffuser ABS



Sloped Ceiling



IP44



RF Model



Model	Size	Structure	Blades	Mounting	Control type
33480	M	Matt White	Matt White	Surface	Remote Control RF
33490	M	Dark Brown	Brown		
34105	M	Matt White	Maple		
34106	M	Brown	Maple		

Example 33480 — TYPHOON M Ø1300 White fan IP44

Air performance

Size	Airflow (m3 min)	RPM	Power (W)
M	ø1270/50"	183	50-71-93-115-138-162

Measurements

Surface	
M	A A1 F
A: 390/15.35" A1: 370/14.57" F: ø1270/50"	



Model	Size	Structure	Blades	Mounting	Control type	Light Model	Color T	Dimm
33480-14	M	Matt White	Matt White	Surface	Remote Control RF	Standard	3000K	Yes
33490-16	M	Dark Brown	Brown					
34105-130	M	Matt White	Maple					
34106-130	M	Brown	Maple					

Example 33480-14 — TYPHOON M LED White fan IP44

Air performance

Size	Airflow (m3 min)	RPM	Power (W)
M	ø1270/50"	183	50-71-93-115-138-162

Lighting features

Power	19W
Lumen Output	900lm
Light Source	SMD LED
Dimmable K	3000K
CRI	>80

Measurements


Surface	
M	A A1 F
A: 390/15.35" A1: 355/13.98" F: ø1270/50"	

Palma
Faro Lab



Size

Tamaño



M

ø1290/50.8"

Finish


Acabado



Dark Brown
Dark Brown

Light Kit

Kit de luz



Standard

1 E27 LED max. 15W

Mounting

Montaje



Surface

Control system

Sistema de control



Smart Wi-Fi



Wired wall controller



Remote control



0-10V/1-10V

Palma 34301



Palma 343011B

Fan features

Material	Structure Steel
	Blades ABS
	Diffuser Glass




Textured blade



Glass diffuser




IP44



Smart option



RF Model
Memory function page 27

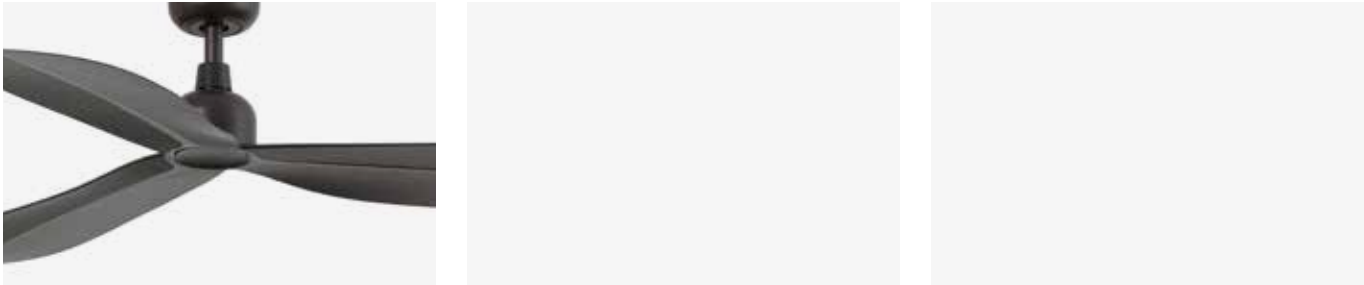

Model	Size	Structure	Blades	Mounting	Control type
34301	M	Dark Brown	Dark Brown	Surface	Remote Control RF WT Remote + Smart Wi-Fi VC 0-10V/1-10V Active/Passive RW White Wired Wall Controller RB Black Wired Wall Controller


Example 34301WT — PALMA M Ø1290 Brown fan IP44 TUYA

Air performance

Size	Airflow (m3 min)	RPM	Power (W)
M	ø1290/50.8"	52-73-98-131-152-179	69-100-136-170-200-230
			4-5-9-15-24-35

Measurements

Surface	Recessed
M	
A: 280/11.02" A1: 173/6.81" F: ø1290/50.8"	

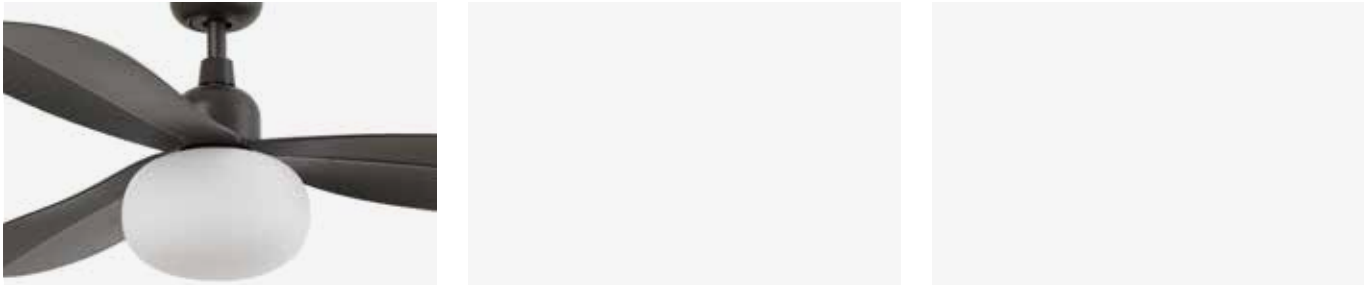

Model	Size	Structure	Blades	Mounting	Control type	Light Model
34301	M	Dark Brown	Dark Brown	Surface	Remote Control RF WT Remote + Smart Wi-Fi VC 0-10V/1-10V Active/Passive RW White Wired Wall Controller RB Black Wired Wall Controller	1B Standard

Example 34301VC1B — PALMA M Ø1290 Brown ceiling fan 1xE27 0-10V

Air performance


Size	Airflow (m3 min)	RPM	Power (W)
M	ø1290/50.8"	52-73-98-131-152-179	69-100-136-170-200-230
			4-5-9-15-24-35

Lighting features

Light Source	1 E27 LED max. 15W
Recom. Bulb	17463

Measurements

Surface	Recessed
M	
A: 412/16.22" A1: 173/6.81" F: ø1290/50.8"	



Marine

Faro Lab



Marine 34372

Size

Tamaño



M
ø1250/49.2"

Finish

Acabado



Matt White
Oak



Dark Brown
Oak



Dark Brown
Dark Walnut



Matt White
Matt White



Dark Brown
Dark Brown

Mounting

Montaje



Surface

Control system

Sistema de control



Smart Wi-Fi



Wired wall controller



Remote control



0-10V/1-10V



Marine 34370



Material	Structure Steel
	Blades ABS



Realistic wood-finish
ABS blades



Sloped Ceiling



IP44



Smart option



RF Model
Memory function page 27



Marine 34370



Check
p.48

Marine — Faro Lab

IP44

220-
240V

50 /
60Hz





NEW



NEW



NEW




Model	Size	Structure	Blades	Mounting	Control type
34274	M	 Matt White	 Matt White	 Surface	 Remote Control RF
34275	M	 Dark Brown	 Dark Brown		WT Remote + Smart Wi-Fi
34370	M	 Matt White	 Oak		VC 0-10V/1-10V Active/Passive
34371	M	 Dark Brown	 Oak		RW White Wired Wall Controller
34372	M	 Dark Brown	 Dark Walnut		RB Black Wired Wall Controller

Example 34274WT — MARINE M Ø1250 White ceiling fan IP44 TUYA

M	ø1250/49.2"	67-83-108-121-150-174	86-121-146-175-198-222	4-6-9-14-20-27
---	-------------	-----------------------	------------------------	----------------

Measurements

Surface	
M	
A: 245/9.65" A1: 221/8.7" F: ø1250/49.2"	

