



INTEGRATED 0–10 V RECEIVER, REF. 34168X, PASSIVE

* Note : Only for ceiling fans with references ending in 'VC'

Receptor 0-10V integrado ref. 34168X, pasivo

* Nota : Sólo para ventiladores de techo cuyas referencias terminen en «VC»


* Signal one for fan

** Signal two for fan light & fan direction

FUNCTION	VIN VOLT	CASAMBI %
FAN STOP	0	0.5
SPEED 1	1.7	11
SPEED 2	3.3	22.5
SPEED 3	5	43
SPEED 4	6.6	63
SPEED 5	8.3	80
SPEED 6	10	96

FUNCTION	VIN VOLT	CASAMBI %
REVERSE (summer)	0	0.5
LIGHT OFF	2.0	12
LIGHT MIN	4.0	33.7
LIGHT MEDIUM	6.0	56
LIGHT ON (bright)	8.0	80
FORWARD (winter)	10	96

Voltage inputs to set from automation system 0-10V. Tolerance VIN±10%

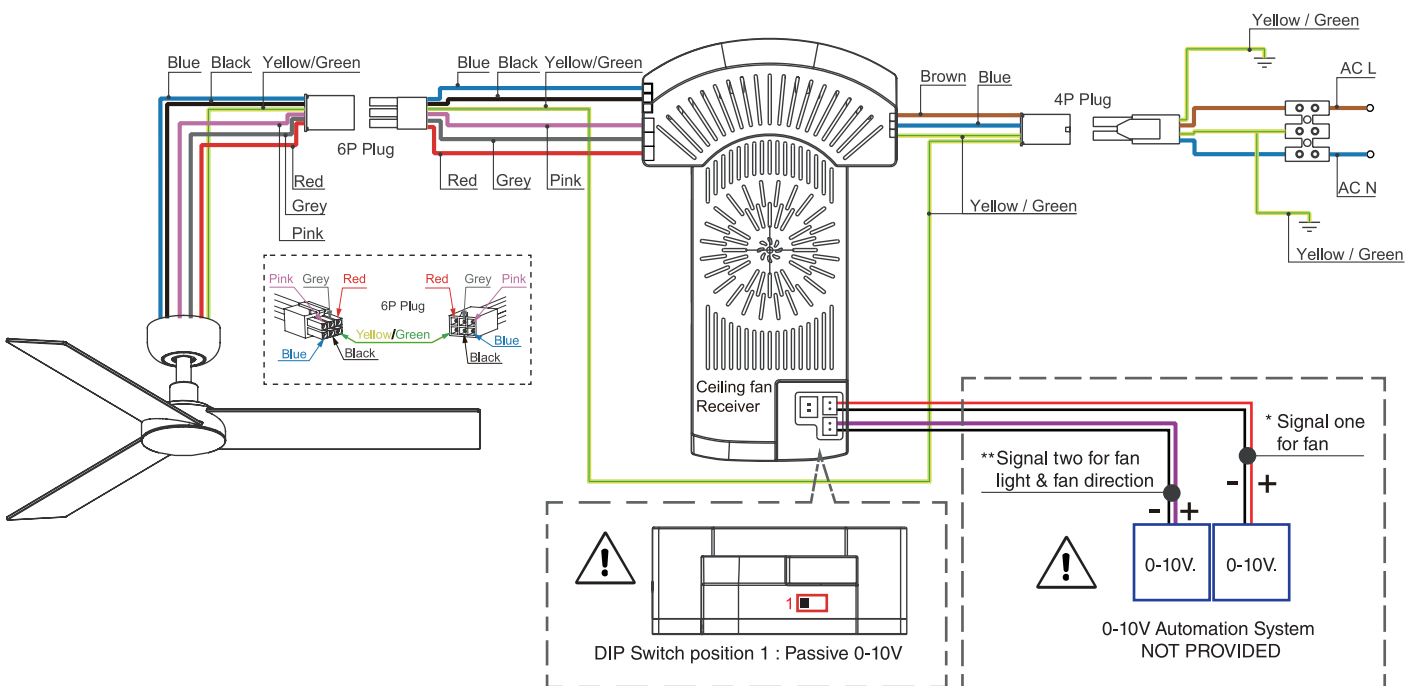

L : brown, marrón, marró, marron, marrone, castanho, braun, bruin, кофё, коричневый, hnědá, brązowy, кафяв, hnědý

بنى

N : blue, azul, blau, bleu, blu, azul, blau, blauw, μπλε, синий, modrá, niebieski, син, modrý


أزرق




yellow-green, amarillo-verde, groc-verd, jaune-vert, giallo-verde, verde-amarelo, gelb-grün, gell-groen, κίτρινο-πράσινο, желто-зеленый, žltozelená, zólto-zielony, жълто-зелен, žltozelená

أصفر - أخضر

Ref. 34168X, ACTIVE without light | **Ref. 34168X, activo, sin kit de luz**

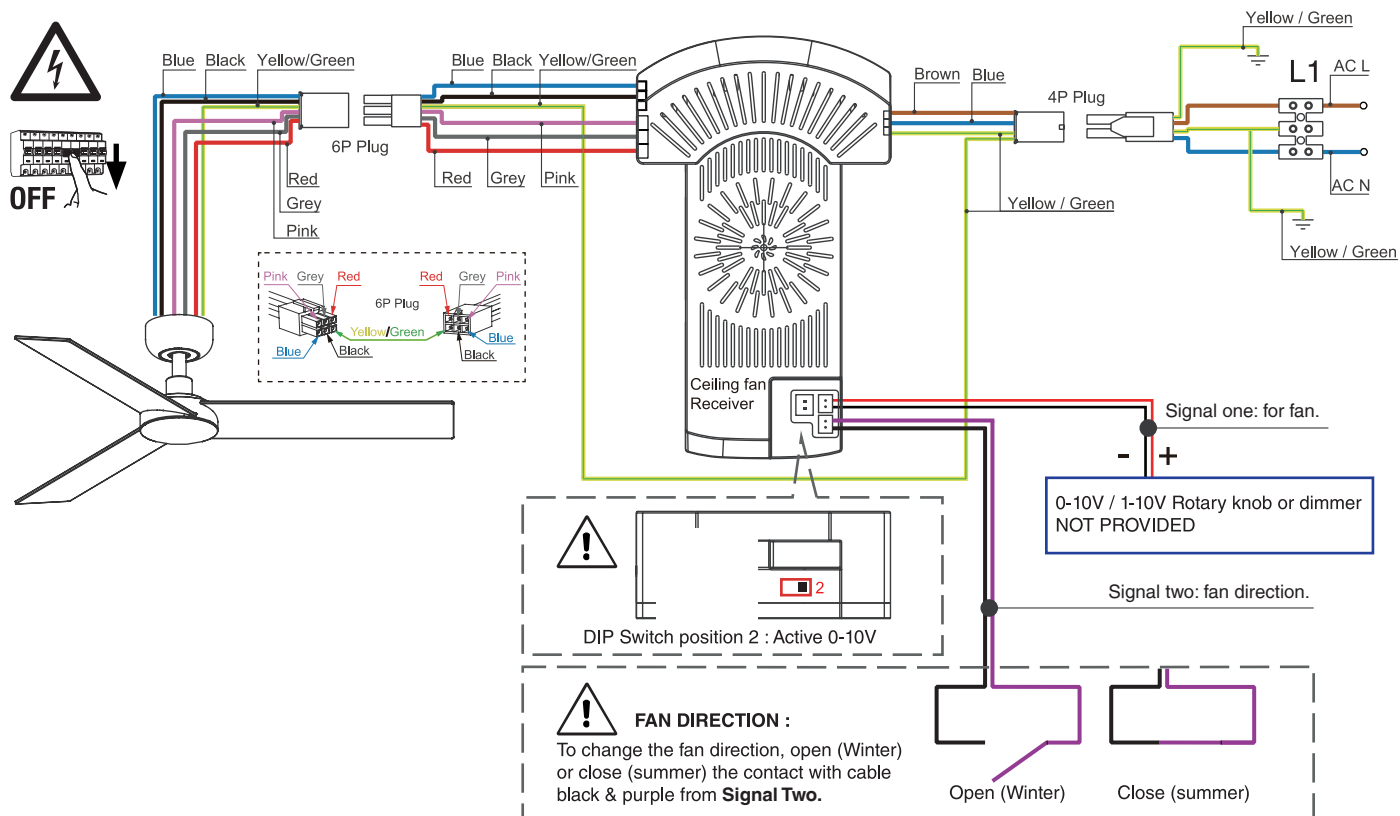

Ref. 34168X, ACTIVE with light kit | **Ref. 34168X, activo, con kit de luz**

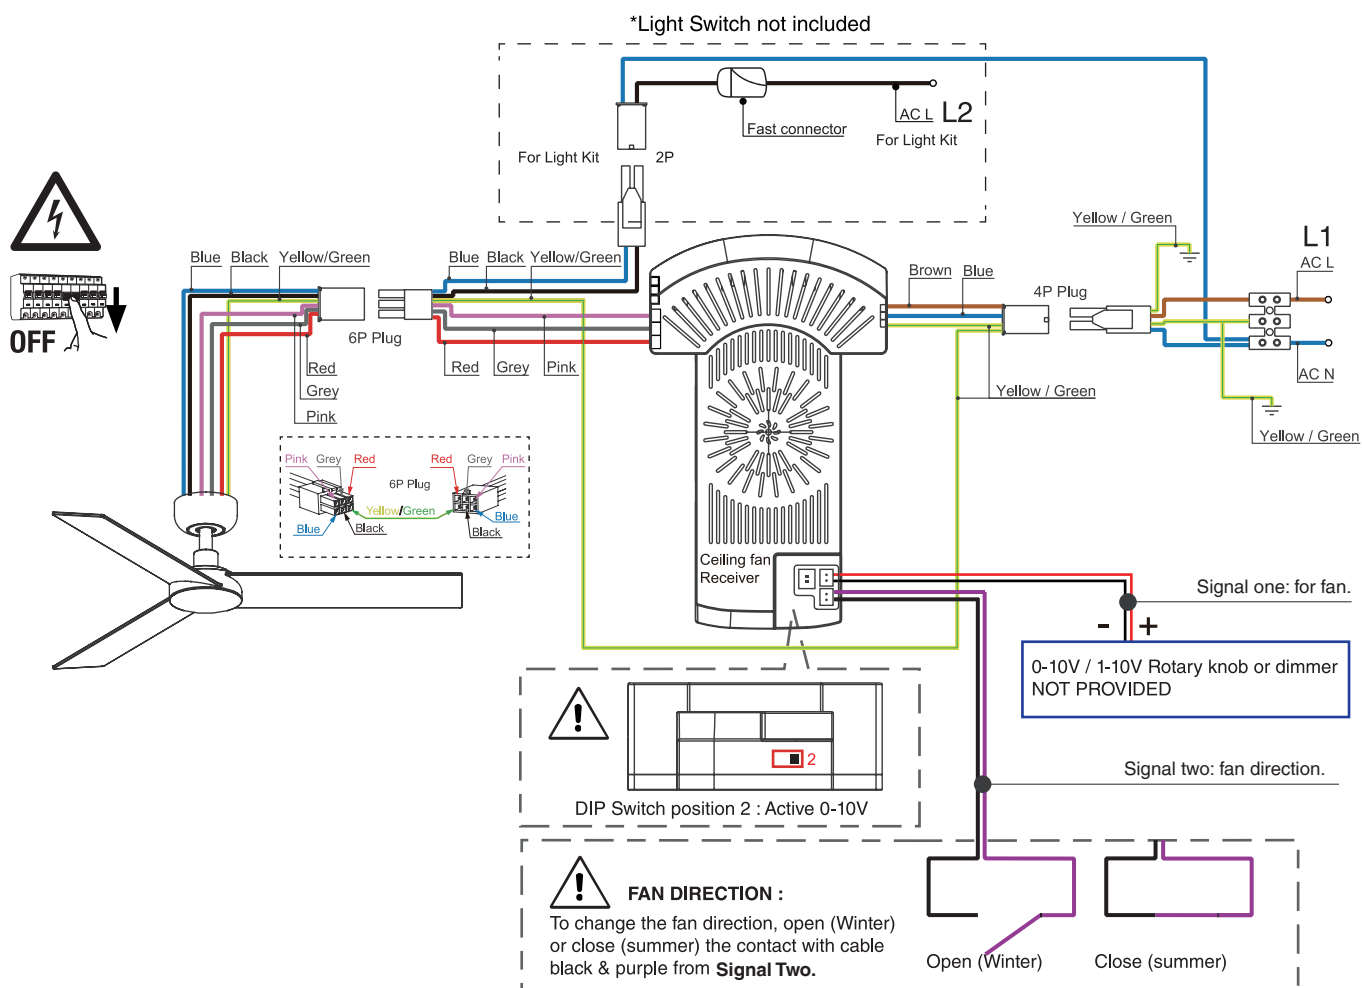

0-10V Line from 0 to 6 speeds selected by a 0-10 ROTATORY KNOB **Not provided**.
Light kit connected with separated switch on/off **Not provided**.




INTEGRATED 0–10 V RECEIVER, REF. 34168X

* Note : Only for ceiling fans with references ending in 'VC'


Receptor 0-10V integrado ref. 34168X

* Nota : Sólo para ventiladores de techo cuyas referencias terminen en «VC»


01




02

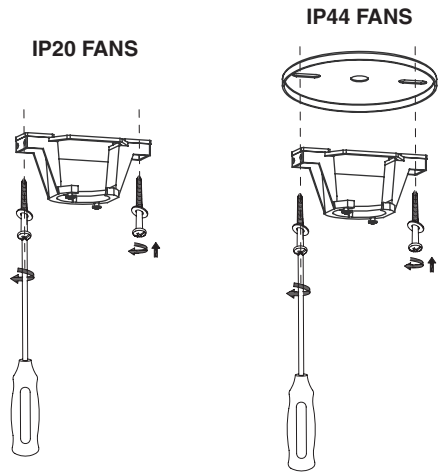

03

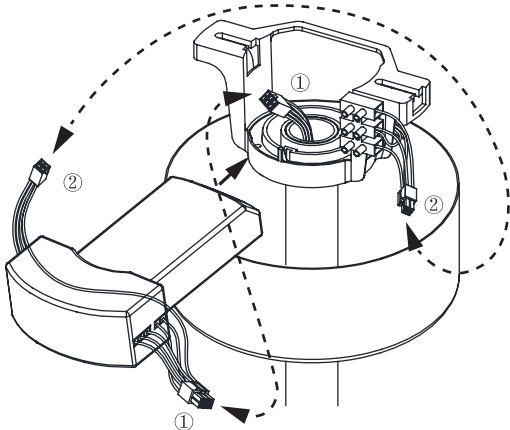


04

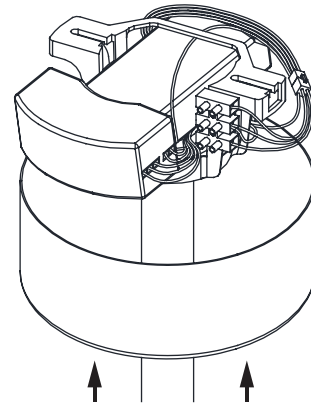

05

A
For Slopped ceiling max 12°

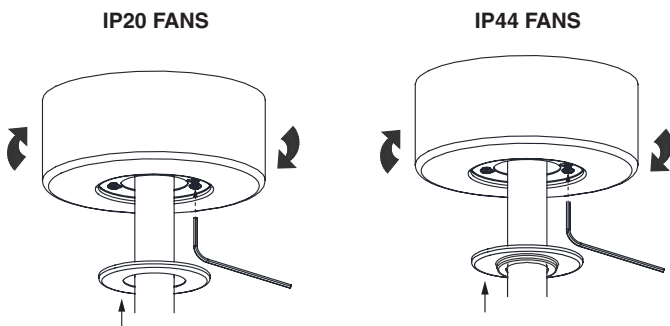

06

B
For flat ceiling

